


...A FULL CARD OF KNOCKOUT FEATURES!...



FOR EYE-POPPING EFFECTS

AND NO LOST PROGRAMS!

PS TO GEOS
A PRINT SHOP REMODELING

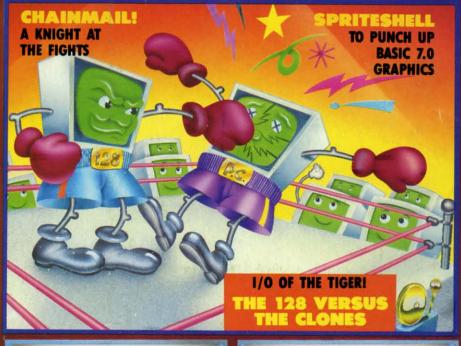

CRYSTALLUS

NO GARDEN VARIETY MAZE



RED ALERT

INSTANT URBAN DECAY!

S.O.S.


YOUR MAYDAYS ANSWERED

TIPS AHOY!

AND MORE FOR YOUR COMMODORE





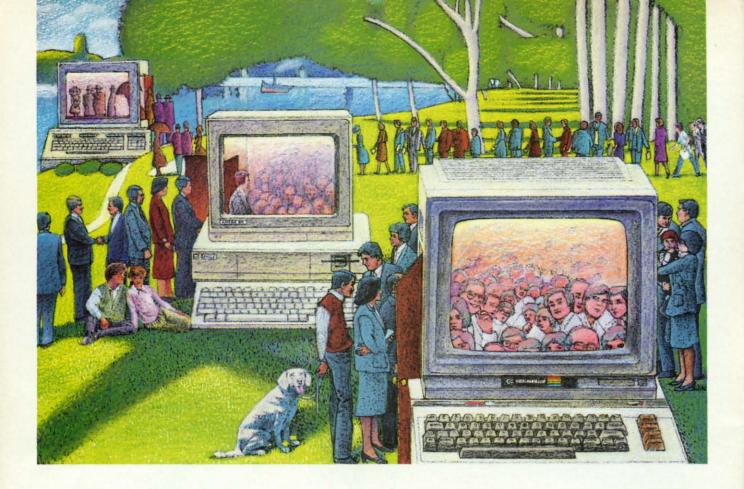

USE THE BRAINS YOUR COMMODORE WASN'T BORN WITH.

Right at your fingertips in CompuServe's Commodore® Forums.

Our Commodore Forums involve thousands of Commodore users worldwide. These forums show you just how easy it is to get the most from your Commodore computer.

The Commodore Arts and Games Forum is for all Commodore 8-bit computers, concentrating on music, graphics, and games. The Commodore Communications Forum has updates of communications software. The Commodore Programming Forum supports programmers and developers of Commodore 8-bit computers. And the Amiga* Forum serves as the national resource for all business and entertainment applications in the Amiga community.

Easy access to free software, including free uploads.

You can easily download first-rate, non-commercial software and utility programs. Upload your own programs free of connect time charges. And take advantage of CompuServe's inexpensive weeknight and weekend rates, when forums are most active and standard online charges are just 10¢ a minute. You can go online in most areas with a local phone call. Plus, you'll receive a \$25.00 Introductory Usage Credit when you purchase your CompuServe Subscription Kit.

Information you just can't find anywhere else.

Use the Forum Message Board to exchange mail with fellow members. Join ongoing, real-time discussions in a Forum Conference or communicate with industry experts. Scan Forum

Data Libraries for non-commercial software. Enjoy other useful services too, like electronic editions of popular computer magazines.

All you need is your Commodore computer (or almost any other personal computer) and a modem.

To buy your Subscription Kit, see your nearest computer dealer. Suggested retail price is \$39.95. To receive our free brochure, or to order direct, call 800-848-8199 (in Ohio and Canada, call 614-457-0802). If you're already a CompuServe subscriber, type GO CBMNET (Commodore Users Network) at any! prompt to see what you've been missing.


CompuServe®

Information Services, P.O. Box 20212 5000 Arlington Centre Blvd., Columbus, Ohio 43220

800-848-8199 In Ohio, call 614-457-0802

An H&R Block Company

Reader Service No. 177

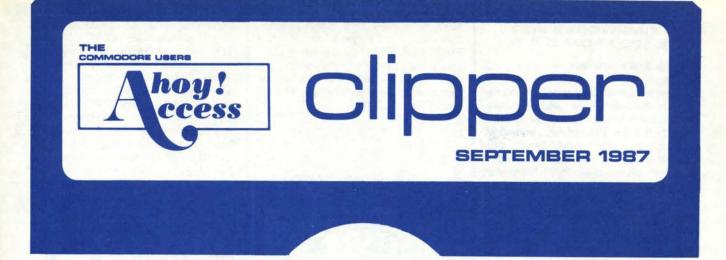

Ahoy! Readers:

Wow! I couldn't wait to write this letter to tell you about all the fantastic offers we have in store for you this issue. This issue the savings really add up. The best without question is \$ & S' offer to sell any Timeworks C-128 program for \$34.90. That's a SAVINGS OF 50%! But there's lots more. The First Annual New York AmiEXPO will be held October 10-12, 1987 at the Sheraton Centre Hotel. With the coupon on page 3 of this Clipper, you may SAVE \$5 on the cost of attendance. And our friends at Computer Mart are offering a whopping 25% SAVINGS on their online help program called The Live-In Reference Manual. Montgomery Grant is also back with a FREE GAME DISK with any purchase over \$100. And there's even more!

If you took advantage of all of our offers this month, you could SAVE WELL OVER \$50. Your subscription to Ahoy! magazine truly pays for itself!

Be sure to look for us in November, when we'll have more great offers to tempt you.

Admirally yours,

Joe Fergeson
Director
Ahoy! Access Club

50% OFF SOLID WOOD COMPUTER DESK FROM PROTECTO...

Located in the heartland of America, Barrington, Illinois, Protecto Enterprizes was one of the pioneers in the computer discount mail order business. And the reasons that they continue to do so well are simple. They offer exceptional support and unusual guarantees. Their 15 DAY FREE TRIAL policy on products including software is very impressive.

Protecto knows that once you buy from them, you'll be likely to buy from them again. So they're making a fantastic offer on a valuable computer accessory, a beautiful, Solid Oak Computer Desk. Listing for \$199, this solid wood desk is available to you as a member of the Ahoy! Access Club for only \$99.95. You will need to add \$15 for shipping and handling, and some assembly is required. But with almost 50% SAVINGS, this is surely one of the best offers we've ever featured. Just clip the Protecto

coupon on page 3 of this *Clipper*, and send it along with your order. This offer expires October 30, 1987, so don't delay.

PAY FOR FOUR MONTHS, GET A FREE MODEM FROM GUANTUMLINK...

QuantumLink is one of the better subscriber services for features like online games, live conferences, software reviews, and user group support. Their advertisement in this month's issue of Ahoy! will tell you how you can receive a FREE QUANTUMLINK MEMBER-SHIP KIT when you subscribe to Ahoy! (Since you're probably already a subscriber, you may take advantage of this offer by extending your subscription.) For Ahoy! Access Club members, QuantumLink is making an additional offer: Get FREE QuantumLink software, plus a FREE 300-baud, auto-dial modem by paying for four months of QuantumLink Basic Service (\$9.95/month) at \$39.80. You may order by clipping the **QuantumLink** coupon on page 3 of this *Clipper*, or by calling them at 1-800-392-8200, and asking for Department 25. This offer expires October 31, 1987, so mail or phone your order TODAY!

SAVE ALMOST 50% ON THE STAR MICRONICS NP-10 FROM LYCO COMPUTER...

If perchance you're in the market for a printer, read on. This issue Lyco Computer is offering one of the best printer values I've ever seen. With a 100 character per second draft mode, the Star Micronics NP-10 offers speed as well as fine near letter quality output. It offers a choice of friction or tractor feed, and has all the controls on the front panel. With an STD Parallel port, the Star Micronics NP-10 will require an additional interface. But unlike other printers with built-in interfaces, it is applicable to other equipment should you decide to upgrade. The suggested retail price is \$249, and it's an excellent value at Lyco's regular discounted price of \$169. But for a limited time, you may buy this terrific printer from Lyco Computer for only \$129.

In each issue of Ahoy!, you'll find two pages of great computer offerings from Lyco Computer. Lyco sells a wide variety of Commodore-compatible hardware and software at good prices. To get more details on shipping and handling for the Star Micronics NP-10 and applicable interfaces, check out Lyco's ad in this month's issue of Ahoy! To order your Star Micronics NP-10 and cable or interface, just clip the Lyco coupon on page 3 of this Clipper. For more information on printers and interfaces, you may call them at 1-800-233-8760; in Pennsylvania, call 1-717-494-1030. They will accept phone orders on this offer, but you must mention your membership in the Club. This offer expires on October 15, 1987, so hurry and complete the Lyco coupon right away.

SUBSTANTIAL SAVINGS ON TIMEWORKS FOR THE 128 FROM S & S...

S & S Wholesalers has very good prices, perhaps the best you'll find anywhere on Commodore and Commodorecompatible hardware and software. Among the brand names of software sold by S & S is Timeworks. Timeworks has created some really terrific programs, including Partner. If you missed our enthusiastic review in the November '86 issue of Ahoy!, let me just say we liked it a lot. Partner puts some nifty accessories at your fingertips, like a Date Book and Appointment Calendar, Memo Pad, Address Book, Calculator, Envelope Addresser and Label Maker, Auto Dialer (an auto-dial modem is required, of course), and Screen Print. Partner's other features include SwiftLock and SwiftLoad, both very useful. The regular retail price of Partner is \$69.95, but that's not what it will cost you....

S & S is anxious for you to consider buying from them when you're in the market for Timeworks products or any other programs, so they're making you this exciting offer: When you clip the S & S coupon on page 3 of this Clipper, you can purchase any Timeworks C-128 program for only \$34.90. That represents OVER 50% SAVINGS on this excellent software! It's S & S's way of motivating you to consider their good prices and excellent service. See their ad in this month's issue of Ahoy! You will need to add \$4 for shipping and handling, if your order is under \$100. You may also use your VISA or MasterCard, but you must add 3%. Because of some confusion in the past, they are not accepting phone orders. YOU MUST ENCLOSE THE S & S COUPON TO TAKE ADVANTAGE OF THIS FABULOUS OFFER! This offer expires on October 15, 1987, so mail your order RIGHT AWAY!

FREE GAME DISK WITH PURCHASE FROM MONTGOMERY GRANT...

If you haven't yet checked out the prices from Montgomery Grant, you'll surely want to do so. They have a wide variety of Commodore and Commodorecompatible peripherals and their prices are among the lowest in the country. Whether you're looking for a printer, a disk drive, or some other peripherals, Montgomery Grant is one of the suppliers you should definitely consider. When you're ready to buy from Montgomery Grant, be sure to use their 800 toll-free number, because besides having great prices, with every purchase over \$100, Montgomery Grant will add a FREE GAME DISK. Read their ad in this month's issue of Ahoy! for details about ordering. They prefer that you place your order by phone. Just call 1-800-3457059, or in New York, call 1-212-594-7140. And don't forget to ask for your FREE GAME DISK. If you prefer to place your order through the mail, simply clip the coupon on page 3 of this *Clipper*. This offer expires October 15th, so don't wait. Order TODAY!

25% SAVINGS ON THE LIVE-IN REFERENCE MANUAL FROM COMPUTER MART...

Computer Mart is relatively new to our Ahoy! Clipper. They have some excellent programs for sale, including Kracker Jax, their powerful parameter copy program. This month Computer Mart is featuring \$5 OFF their great online help program called The Live-In Reference Manual. Regularly selling for \$19.95, The Live-In Reference Manual has 17 screens of information, including ASCII characters, POKEs, color codes, selected DOS commands, BASIC keywords, abbreviations and token values, sound registers, musical notes in eight octaves, and much more! And even with all this help The Live-In Reference Manual uses almost none of the RAM for BASIC programming.

Computer Mart also has some other fine software worth looking at, so be sure to find their ad in this month's issue of Ahoy! Because Computer Mart wants you to give serious consideration to their Live-In Reference Manual, until October 15, 1987, you may take \$5 OFF the cost of this valuable program. Just clip the Computer Mart coupon on page 3 of this Clipper, and send it with your order. This offer disappears October 15th, so don't wait.

SAVE \$5 ON AmiEXPO...

Many of you have purchased or are considering purchasing Amigas. But even if you haven't thought about it before, you're sure to want to attend The First Annual New York AmiEXPO. Scheduled October 10-12, 1987, The New York AmiEXPO will be held at the Sheraton Centre Hotel. With 80 exhibitors and over 30 conferences and seminars, 10,000 persons are expected to attend from all over the eastern U.S. There will be keynote sessions by leaders in the field. The New York AmiEXPO promises to be the premier Commodore event for the East Coast this year. The regular prices for one, two, or three days of attendance with advance registration are \$10, \$15 and \$20, respectively. At the door, all tickets will cost \$5 more and registration is likely to be very crowded, so when you mail in your advance registration, you'll save time and money. For

more information, call 1-800-32-AMIGA, or in New York State, call 1-212-867-4663. When you call this number, they'll send you registration forms to register in advance. Thanks to the generosity of AmiEXPO, you may SAVE an additional \$5, by enclosing the AmiEXPO coupon on page 3 of this Clipper. You may also use the coupon at the door, but obviously, you'll save \$5 more when you register by mail. Other events are planned for Los Angeles and Chicago, so keep watching your Clipper for further developments.

10% OFF WORLD CLASS LEADER BOARD FROM ACCESS SOFTWARE...

Access Software is a leader in the field of pro golf simulators. They built their reputation with Leader Board, then Tournament Disk #1, and finally Executive Disk #1. Access Software now presents their latest and greatest pro golf simulator, World Class Leader Board. It includes three of the most famous 18-hole golf courses: St. Andrews, Scotland, the most revered course in golf; The Doral Country Club, the Florida Blue Monster; and Cypress Creek, Texas, the largest and finest golf course in the U.S. World Class Leader Board features authentic reproductions of these actual courses with trees, traps, ruff, and water hazards. The 4th course included is The Gauntlet Country Club. Only those who have mastered the best courses in the world can expect to come close to par on the Gauntlet.

World Class Leader Board features a scorecard printout, aerial views, a course editor (to arrange the holes in any order you choose), a practice putting green, and a driving range. There are thousands of trees, up to 192 per hole. In addition, the improved graphics and playability increase difficulty and realism.

My whole family had a wonderful time playing World Class Leader Board, and so will you. With a suggested retail price of \$39.95, World Class Leader Board will challenge you with the same strategy and option decisions you face in a real game. And because the look and feel are so likelike, it may improve your actual game as well.

Now and for a limited time, you may SAVE 10% on World Class Leader Board, when you order it directly from Access Software. Use the handy Access Software coupon on page 3 of this Clipper, or you may call them at 1-801-298-9077 (Please do not use their toll-free number!). Don't forget to mention you saw this offer in the Ahoy! Clipper, so that you get your discount. This offer expires on October 15th, 1987, so hurry and place your order RIGHT NOW!

The Ahoy! Access Clipper is published bimonthly by Ahoy! magazine and sent free to selected subscribers of Ahoy! Ahoy! is a monthly publication of Ion International Inc. The cost of a one-year subscription is \$23.00; two years are \$44.00. inquiries regarding subscriptions to the magazine should be addressed to Ion International Inc., 45 West 34th Street, New York, New York 10001.

SAVE UP TO 50% ON TIMEWORKS FROM S & S

\$5,

on

se

Mail to: S & S Wholesalers 226 Lincoln Road Miami Beach, FL 33139 NO PHONE ORDERS, PLEASE!

YES, **S & S**, I want to purchase **Timeworks** programs for the C-128 at \$34.90 each. I understand this represents an OVER 50% SAVINGS from the regular retail price of some programs. If my order is under \$100, I'm adding \$4 for shipping and handling. Thanks! FOR VISA OR MASTERCARD PURCHASE, ADD 3%.

Name on Credit Card	
Credit Card #	Exp. Date
Signature	

SAVE ALMOST 50% ON THE STAR MICRONICS NP-10 PRINTER FROM LYCO COMPUTER

Mail to: Lyco Computer P.O. Box 5088 Jersey Shore, PA 17740 For faster service, call 1-800-233-8760. In PA, call 1-717-494-1030.

YES, **Lyco**, I want to buy the Star Micronics NP-10 Printer. My order for the printer (and applicable cable or interface if desired) is enclosed. CREDIT CARD ORDERS: PLEASE ADD 4%.

Name on Credit Card	
Credit Card #	Exp. Date
Signature	

10% OFF WORLD CLASS LEADER BOARD FROM ACCESS SOFTWARE

Mail to: Access Software 2561 South 1560 West Woods Cross, UT 84087

For faster service, call 1-801-298-8077. VISA and MasterCard accepted.

YES, **Access Software**, I want to SAVE 10% on your excellent pro golf simulator, World Class Leader Board. My payment of \$35.95 plus \$1 for shipping and handling is enclosed. Thanks!

SAVE 50% ON SOLID OAK COMPUTER DESK FROM PROTECTO ENTERPRIZES

Mail to: Protecto Enterprizes 22292 Pepper Road Barrington, IL 60010

For information, call 1-312-382-5244. NO PHONE ORDERS, PLEASE!

YES, **Protecto**, I want to SAVE almost 50% on your Solid Oak Computer Desk. Enclosed is my payment of \$114.95, representing \$99.95 for the computer desk and \$15 for shipping and handling. Thanks!

SAVE \$5 ON AMIEXPO

FOR REGISTRATION FORMS, FIRST CALL 1-800-32-AMIGA, OR IN NEW YORK STATE CALL 1-212-867-4663, THEN SEND THIS COUPON WITH THAT FORM.

Mail to: The First Annual New York AmiEXPO 211 East 43rd Street, Suite 301 New York, NY 10017

YES, AmiEXPO, I want to SAVE \$5 on attendance to your First Annual New York AmiEXPO to be held October 10-12, 1987 at the Sheraton Centre in New York City. I understand that only with this coupon may I SAVE \$5. If my payment is not enclosed, I may still SAVE \$5 at the door, but the cost is also \$5 more.

Days	Advance Registration	At the Door	
1	\$5 (with coupon)	\$10 (with coupon)	
2	\$10 (with coupon)	\$15 (with coupon)	
3	\$15 (with coupon)	\$20 (with coupon)	
			_

FREE GAME DISK WITH \$100 PURCHASE FROM MONTGOMERY GRANT

Mail to: Montgomery Grant Penn Station Main Concourse New York, NY 10001 For faster service, call 1-800-345-7059. In NY, call 1-212-594-7140.

YES, **Montgomery Grant**, I want to get my FREE GAME DISK. Enclosed is my order for \$100 or more. I have checked your ad for the details about ordering. Thanks!

Name on Credit Card	
Credit Card #	Exp. Date
Signature	

FREE MODEM AND SOFTWARE FROM QUANTUMLINK

Mail to: QuantumLink Computer Services 8620 Westwood Center Drive Vienna, VA 22180

For faster service, call 1-800-392-8200, Dept. 25. YES, **QuantumLink**, I want to get my FREE MODEM AND SOFTWARE by paying now for four months of **QuantumLink** Basic Service (\$9.95/month). My payment of \$39.80 is enclosed.

Thanks!

\$5 OFF THE LIVE-IN REFERENCE MANUAL FROM COMPUTER MART

Mail to: Computer Mart 2700 NE Andresen Road Vancouver, WA 98661

YES, **Computer Mart**, I want to SAVE \$5 off the regular price of \$19.95 on *The Live-In Reference Manual*. My order is enclosed. Thanks for my 25% SAV-INGS!

Name on Credit Card	
Credit Card #	Exp. Date
Signature	

Name	Name
Address	Address
City/State/Zip	City/State/Zip
	This offer expires October 15, 1987.
Name Address City/State/Zip This offer expires October 15, 1987.	Name Address City/State/Zip This offer expires October 15, 1987.
Name	Name Address City/State/Zip This offer expires October 15, 1987.
	Name_

Ahoy!

CONTENTS

DEPARTMENTS

A View from the Bridge of the September issue of Ahoy!	7
Scuttlebuttproduct pronouncements from the Summer '87 CES	. 8
Art Gallerythe latest digital delineations on the 64 and Amiga	. 20
Tips Ahoy!discoveries from across the Commodore nation.	45
S.O.Ssolutions to common hangups concerning Flankspeed.	61
Reviewsthe MSD lives, in the form of three new accessories.	63
Flotsamwe get tagged in the Wizard Tag II challenge!	68
Errataan error of omission in the docs for Univaders (July '87)	.68
Commodaresa quartet of quizzes for computer whizzes.	73
Program Listingsor, how to beat the high cost of software.	77
FEATURES Rupert Report: The 128 versus The Clones by Dale Rupert*	32
Entertainment Software Section (contents on page 41)	
Amiga Section (contents on page 53)	41
*Includes program: Benchmarks Galore (for the C-128)	41 53
metades program. Benefinarias Guiore (for the C-128)	_
PROGRAMS	_
	_

Crystalius for the C-04 by Bob Blackmer	10
Hoops for the C-64 by Tony Brantner	18
Centerfold for the C-64 by Buck Childress	22
No News for the C-64 and C-128 by Buck Childress	30
Spriteshell 128 by Cleveland M. Blakemore	48
PS to GEOS for the C-64 by Shawn K. Smith	51
Red Alert for the C-64 by Tony Brantner	60
Chainmail! for the C-128 by Cleveland M. Blakemore	70
Bug Repellents for the C-64 and C-128 by Buck Childress	78
Flankspeed for the C-64 by Gordon F. Wheat	79

Cover art by James Regan and Tony Mascio; photos by Michael R. Davila and Morton Kevelson

President/Publisher Michael Schneider

Editor

David Allikas

Art Director
JoAnn Case

Managing Editor
Michael R. Davila

Senior Editors
Tim Little
Tim Moriarty

Production Director

Laura Pallini

Technical Editors

David Barron

Bob Lloret

Consulting Editors

Ben Bova

Morton Kevelson

Dale Rupert

Entertainment Editor
Arnie Katz

Art Production Christopher Carter Victoria Green Stacy Weinberg

Bulletin Board SYSOP B.W. Behling

Circulation Director
W. Charles Squires

Advertising Director Lynne Dominick

Director of Promotion Mark Kammerer

> Controller Dan Tunick

Advertising Representative
JE Publishers' Representative
6855 Santa Monica Blvd., Suite 200
Los Angeles, CA 90038
(213) 467-2266
Boston (617) 437-7628
Dallas (214) 660-2253
New York (212) 724-7767
Chicago (312) 445-2489
Denver (303) 595-4331

ISSUE NO. 45 SEPTEMBER 1987

San Francisco (415) 864-3252

Ahoy! (ISSN #8750-4383) is published monthly by Ion International Inc., 45 W. 34th St., Suite 500, New York, NY, 10001. Subscription rate: 12 issues for \$23.00, 24 issues for \$44.00 (Canada \$30.00 and \$55.00 respectively). Second class postage paid at New York, NY 10001 and additional mailing offices. © 1987 by Ion International Inc. All rights reserved. © under Universal International and Pan American Copyright conventions. Reproduction of editorial or pictorial content in any manner is prohibited. No responsibility can be accepted for unsolicited material. Postmaster, send address changes to Ahoy!, 45 W. 34th Street, Suite 500, New York, NY 10001. Direct all address changes or matters concerning your subscription to Ahoy!, P.O. Box #341, Mt. Morris, IL 61054 (phone: 815-734-4151). All editorial inquiries and materials for review should be sent to Ahoy!, 45 W. 34th St., Suite 500, New York, NY 10001.



Lyco Computer

Marketing & Consultants

TO ORDER CALL TOLL FREE

1-800-233-8760 in PA

(717) 494-1030 or send to Lyco Computer P.O. Box 5088



Jersey Shore, PA 17740

CUSTOMER SERVICE (717) 494-1670

Mon. - Fri. 9AM - 5PM

RISK FREE POLICY

In-stock items shipped within 24 hrs. of order. No deposit on C.O.D. orders. Free shipping on prepaid cash orders within the continental U.S. Volume discounts available PA residents add sales tax. APO, FPO and international orders add \$5.00 plus 3% for priority mail. Advertised prices show 4% discount for cash, add 4% for Master Card and VISA. Personal checks require 4 weeks clearance before shipping. We cannot guarantee compatibility. We only ship factory fresh merchandise. Ask about UPS Blue and red label shipping. All merchandise carried under manufacturer's warranty. Return restriction applicable. Return authorization required. All items subject to change without notice.



COMMODORE & AMIGA SOFTWARE

Broderbund:	Microprose:	Strategic Simula
Bank St. Writer 128K \$32.95	F-15 Strike Eagle \$22.95	Gemstone Healer
Carmen San Diego \$22.95	Gunship \$24.95	Gettysburg
Champ. Lode Runner \$24.95	Kennedy Approach \$18.95	Kampfgruppe
Graphic Lib. I, II, III \$15.95	Silent Service \$22.95	Phantasie II
Karateka \$18.95	Solo Flight \$18.95	Phantasie III
Print Shop\$25.95	Top Gunner \$18.95	Ring of Zelfin
Print Shop Compan, \$22.95		Road War 2000 .
Print Shop Paper \$12.95	Activision:	Shard of Spring .
Science Kit\$35.95	Aliens \$22.95	Wizards Crown
Lode Runner \$24.95	Champion. Basketball . \$22.95	War in the S. Par
Bank St. Filer \$32.95	Hacker \$12.95	Wargame Constr
Bank St. Mailer \$32,95	Hacker 2 \$22.95	Battlecruiser
Access:	Labyrinth \$19.95	Gemstone Warrio
Leader Board \$24.95	Music Studio \$22.95	Baltic 1985
Mach 5 \$23.95	Tass Times \$19.95	Field of Fire
Mach - 128 \$29.95	Titanic \$14.95	Battalion Comma
10th Frame \$24.95	Firebird:	Battle for Norma
Exec. Tournament \$13.95	Colossus IV \$21.95	Battle of Antetier
Tournament #1 \$13.95	Elite \$19.95	Colonial Conque
Triple Pack \$14.95	Frankie Goes to Italy \$19.95	Computer Ambu
Wld. Cl. Leader Brd \$24.95	Golden Path \$24.95	Pro Golf Tour
Microleague:	Guild of Thieves \$24.95	Sublogic:
Microleag. Baseball \$24.95	Pawn \$24.95	Baseball Stadium
General Manager \$19.95	Talking Teacher \$24.95	Flight Simulator
Stat Disk \$17.95	Tracker \$24.95	Jet Simulator
'86 Team Disk \$14.95	Starglider \$24.95	Night Mission Pir
Microleag. Wrestling \$New	Sentry \$24.95	Scenery Disk

Strategic Simulations:	Sublogic Baseball \$31.95
Gemstone Healer \$18.95	Sublogic Football \$26.95
Gettysburg \$35.95	Epyx:
Kampfgruppe \$35.95	Create A Calendar \$17.95
Phantasie II \$24.95	Destroyer \$24.95
Phantasie III \$29.95	Fastload \$24.95
Ring of Zelfin \$24.95	Football \$14.95
Road War 2000 \$24.95	Karate Champ \$19.95
Shard of Spring \$24.95	Movie Monster \$14.95
Wizards Crown \$24.95	Multiplan \$24.95
War in the S. Pacific \$35.95	Sub Battle \$24.95
Wargame Constr \$21.95	Winter Games \$24.95
Battlecruiser \$35.95	Super Cycle \$14.95
Gemstone Warrior \$14.95	Graphics Scrapbook \$14.95
Baltic 1985 \$24.95	Str. Sports Basketball . \$24.95
Field of Fire \$27.95	Wld.'s Great Baseball . \$14.95
Battalion Commander . \$27.95	Summer Games II \$24.95
Battle for Normandy \$27.95	Vorpol Utility Kit \$15.95
Battle of Antetiem \$34.95	World Games \$24.95
Colonial Conquest \$27.95	Unison World:
Computer Ambush \$39.95	Art Gallery 1 or 2 \$15.95
Pro Golf Tour \$27.95	Print Master \$22.95
Sublogic:	Action Soft:
Baseball Stadium \$15.95	Up Periscope\$19.95
Flight Simulator II \$31.95	
Jet Simulator \$31.95	Hi Tech Expressions:
Night Mission Pinball \$21.95	Heart Ware \$6.95
Night Mission Findan \$21.95	Holiday Paper \$8.95

WE STOCK OVER 5000 SOFTWARE TITLES! Commodore prices shown, other systems simular. Call for availability.

LYCO'S COMPUTER SPECIALS!





1-800-233-8760

Panasonic

\$159.95

1080i

- 120 cps Draft Mode24 cps NLQ1-year Warranty

6.95

4.95 4.95 4.95

9.95 4.95 4.95

4.95

1.95 1.95

1.95

1.95

1.95

1.95 5.95 1.95

95 .95

95



Lyco Computer is one of the oldest and most established computer suppliers in America. Because we are dedicated to satisfying every customer, we have earned our reputation as the best in the business. And, our six years of experience in computer marketing is your assurance of knowledgeable service and quality merchandise.

SAVE PRINTERS! ON THESE

INTERFACING

CARDCO

Cardco	G				*			\$32.95
Cardco	GWIZ							\$35.95
Cardco	Super	G	i					\$45.95


XETEC

XETEC	Jr		 \$38.95
XETEC	Super	Graphics	 \$58.95

DSI

PPI.....\$45.95





\$129.95

(Limited Quantity)

- 100 cps draft
- 25 NLQ EZ Front Panel Selection
- Auto Single Sheet Feed
- Adjustable Tractor Feed

STAR MICRONICS

NP-1	0.						\$	s	Р	Е	CIA	L
NL-1	0 .										\$19	95
NX-1	5 .										\$29	95
NB-1	5 .										\$76	39
SD-1	0.										\$22	29
ND-1												
ND-1	5.										\$39	99
SR-1	0.										\$38	39
NR-1	5 .										\$45	58
SD-1	5.										\$35	59
SR-1	5.			·							\$44	45
NB2	4-1	0									\$39	98
NB2	4-1	5				9				8	\$50	30

BROTHER

п	4 11	J.												\$195
H	7 2	0.												\$339
М	110	9												\$195
М	140	9												\$329
M	150	9												\$365
														\$475
Tv	vinv	vri	te	r	D	0	t	&	C)a	iis	V		\$849
20	24	let	te	er	q	u	a	lit	y					\$665
						L.								

DIABLO

		-		•		• •	٠.			•
	0	_	1	-		-		1		
	S		n	L	,	5	н	1	1	
P	180									
	100									
	120									

SP	1200	AI.				7				\$	19	t
SP	1200	As	F	S	2	3	2			\$	19	ŀ
SL	80 Ai			×						\$	37	1
MP	1300	Ai								\$	35	į
MP	5300	Ai								\$	46	j
SP	180 \	C.								\$	14	į
SP	1000	VC								\$	14	1
SP	1200	VC							\$	N	E١	1

PANASONIC

1091 \$179
1092 i \$319
1592 \$389
1595 \$449
3131 \$259
3151 \$399
1080 APIIc \$239
CITIZEN
CITIZEN
120D \$16
Premiere 35 \$469
MSP-10 \$259
MSP-15 \$329
MSP-20 \$299
MSP-25 \$399

SILVER REED

EXP 800 P \$64
OKIDATA
Okimate 20 \$12
Plug n print \$CAL
120 NLQ \$20
292 w/interface \$51
293 w/interface \$65


\$CALL


EPSON												
	LX-800 .											\$17
	EX-800 .											\$34
	EX-1000											
	LQ-800 .											
	LQ-1000											
	FX-286e											
	FX-86e .											\$29
	1 0 2500											600

Box of 10

U	MAXELL 51/4	3.5	U
1	SSDD \$8.99		
	DSDD\$9.99	\$17.99	
S	BONUS		C
	SSDD \$6.99	- 0	9
K	DSDD \$7.50		K
	SKC		-
E			E
	SSDD \$7.99		=
T	DSDD\$9.50		т
-	DSHD \$16.99	-	-
	VERBATIM		
E	SSDD\$9.99	\$13.99	-
	DSDD \$11.99	\$19.99	=
S	Call for generic diskette		C

SEIKOSHA





- 100 cps Draft Mode
- 20 cps NLQ
- Direct Connect C-64/128

\$149.95

(2-year warranty)

MONITORS

Thompson: 4120 RGB/COM 4160/36382	
Teknika:	
MJ-503	\$409
Zenith:	
ZVM 1220	\$89
ZVM 1230	\$89
Panasonic:	
1320	\$369
1361	
NEC:	
Matterna	PCALL

MODEMS

Avetex:	
1200	. \$86
1200	. \$96
2400	\$211
Hayes:	
Smartmodern 300 5	125
Smartmodern 1200 5	360
Smartmodern 1200B 5	339
Smartmodern 2400 5	559
Micromodem lie	125
DSI:	
Messenger Modern 300\$3	2.95

Avatex:	
1200	\$89
12001	\$99
2400	\$219
Hayes:	
Smartmodern 300	\$125
Smartmodern 1200	\$360
Smartmodern 12008	\$339
Smartmodern 2400	\$559
Micromodem Ile	\$125
DSI:	
Messenger Modern 300 S	32 95

Avatex 1200hc Modem

* with cable purchase

Coffer \$99.95

DRIVES

Indus GT C-64 Drive . \$175.95 Blue Chip 64C Drive ... \$CALL Blue Chip C 128 Drive . \$CALL

COMMODORE

(reg. \$1009.85)



• Thompson 4120 Color Monitor w/Cable





commodore HARDWARE

1802C Monitor\$189	C
C1700 RAM\$109	13
C1750 RAM\$169	1
C1351 Mouse \$39	6
1670 Modem SCALL	1

C128 Computer\$249
1571 Drive \$225
1902 Monitor \$285
64C Computer \$175
1541C Drive \$185

Sat 10AM-6PM

Face to Face with Excitement!



There is one sure way to come face to face with the excitement of action: the stunningly realistic combat simulators of MicroProse. Authenticity is the key element that separates mere videogames from today's sophisticated simulations—it's the quality of realistic action that takes you from the world of mere fantasy and into an intriguing realm of spectacular reality. Authenticity is the essence of the MicroProse design approach; excitement is the undeniable result.

F-15 STRIKE EAGLE. The reference standard attack fighter simulation. Totally authentic cockpit flight controls and weapons systems. Missions over Iraq, Egypt, Southeast Asia–even the famous April 1986 Antiterrorist Airstrike against Libya. So realistic Soviet intelligence has reportedly purchased copies for analysis.

GUNSHIP. Helicopter warfare over the high-tech battlefields of tomorrow's headlines, with night vision systems, superb terrain representation for true 'nape of the earth' flying, and the full array of America's most advanced weaponry at your fingertips. Authentic enough to be used in actual helicopter combat environment testing for the United States Army.

Reader Service No. 199

F-15 Strike Eagle available for Commodore 64/128, Apple IIc/e/+(64k), Atari XL/XE/52OST, IBM PC/PCjr and compatibles, and Tandy 1000 Series Gunship available for Commodore 64/128, Apple IIc/e/+(64k), IBM PC/PCjr and compatibles, and Tandy 1000 Series coming soon for Atari XL/XE/52OST and Amiga. Silent Service available for Commodore 64/128, Amiga, Apple IIc/e/+(64k) and IIgs, Atari XL/XE/52OST, IBM PC/PCjr and compatibles, and Tandy 1000 Series. All products have suggested retail prices of either \$34.95 or \$39.95.

Available from your local retailer. If out of stock, contact MicroProse directly for further information on our full range of simulation software, pricing, availability, and to place Mastercard/Visa orders

Commodore, Amiga, Apple, Atari, IBM, and Tandy are registered trademarks of Commodore Electronics, Ltd., Commodore/Amiga, Ltd., Apple Computer Inc., Atari, Inc., International Business Machines, Inc., and Tandy Corp., respectively.



TIC Level on Diver Nat Vales, NEWCSC+ QCV/PP NO

VIEW FIROM TI-IE BIRIDGE

e've said it before, but this month it especially bears repeating: Ahoy! is not a closed shop. Though this issue features programs from regulars Bob Blackmer, Shawn K. Smith, and two apiece from Cleveland M. Blakemore, Tony Brantner, and Buck Childress, the many other talented individuals who regularly submit work should not consider themselves at a competitive disadvantage. We have no staff programmers—all programs are written freelance, and none of these freelancers has a designated slot to fill each month or any month. The same authors keep appearing because they keep providing the best programs. Equal their work, and you'll have an equal chance. Top it, and we'll be writing about you instead one of these months.

As for this month, Ahoy!'s programmers, columnists, and reviewers have turned in a job at least as difficult to surpass as usual:

• The C-128 always seemed like the industry's biggest steal...at least, until Far East ingenuity made it possible to own a generic IBM PC for under \$500. Does the 128 remain the better buy? This month's *Rupert Report* tells you what happened when we put *The 128 versus The Clones*. (Turn to page 32.)

• The 128's built-in sprite editor makes designing the little devils easy...but manipulating them can still be a migraine and a half. So Cleve Blakemore wrote *Spriteshell 128* to endow you with a greater degree of control. (Turn to page 48.)

• With *Spriteshell* in place, maybe you'll be able to create C-128 games as good as Cleve's *Chainmail!* This life and death duel between the Crimson and Green Knights is done to the hilt. (Turn to page 70.)

• After the massive success of Wizard Tag II, Bob Blackmer wasted no time designing another challenge for his many fans. On the other hand, after reading some of the smart aleck letters Bob received (see Flotsam, page 68), we wonder—did Bob intend to entertain his fans, or lose them in the 36 interconnecting cubicles of Crystallus? (Turn to page 16.)

• Are you tired of coming up with new methods of destroying a program in memory? So was Buck Childress. He gives 64 and 128 users protection against some of the most common causes of death in *No News*. (Turn to page 30.)

• We can't promise that Buck's *Centerfold* will make your title screens as appealing as the centerfolds of some other magazines we could name. But it's the best we can do in a family magazine. (Turn to page 22.)

• He's brought auto racing, boxing, bowling, and horse racing to life in these pages...and now Tony Brantner hits from 20 with *Hoops!* (Turn to page 18.)

• Afraid of running out of sports, Tony cribbed from the classics for his second program this month. *Red Alert* involves a *Missile Command*-like defense of a sextet of cities. (Turn to page 60.)

• Barnum and Bailey...Eastman and Kodak...peanut butter and chocolate...when giants in any field merge, the union seems larger than the sum of its parts. It's happened again with Shawn K. Smith's *PS to GEOS*, permitting commerce between two of the most popular programs in Commodore history. (Turn to page 51.)

• If you own an Amiga but not its attendant rodent, you'll be glad that you never threw away that old C-64 trackball — because Morton Kevelson is going to show you how to turn it into a mouse. And once you're happily Rolling Your Own, you can read the reviews also included in this month's Amiga Section, on Space Quest, Disk-2-Disk, and Butcher. (Turn to page 53.)

• Now that it's no longer being produced, we tend to forget how good the MSD SD-2 was. But Computer Mart hasn't—they're distributing three new products in support of the landmark dual drive, all of which are covered in this month's *Reviews* section. (Turn to page 63.)

As space on this page runs out, we'll hastily direct you towards *Scuttlebutt*, beginning on the following page and detailing significant software and hardware announcements from this June's Consumer Electronics Show. Richard Herring's *COMAL Column* was cut from this issue for space considerations, but will be present next month—along with a lot more. As winter approaches, we're only going to get bigger and better!

—David Allikas

COMPUTER REPAIR

800-221-7770

	AMIG	A \$100.00	
Commodore Disk Drive 1541 2031	\$60.00	Commodore Monitor 1701 1702	\$75.00
Commodore		PET 64	
SX-64 Portable	\$99.00	WIC 20	\$45.00
Computer	*	Computers .	
Commodore		Commodore	
Printer MPS 801	\$50.00	Printer 1526	\$75.00
MPS 803	- CARL	MPS 802	*
MSD SD1, SD2		Commodore	
CBM 128	\$85.00	Computer 8032	\$85.00
CBM 1571		8050	*

				8030	7
WE BUY	ALIVE	e com	modore	PART	s
64	60.00	SERVICE	E CENTER	901225-01	11.85
1541	75.00			901226-01	11.85
SX64	150.00	CABLES A	ND MISC.	901227-03	11.85
MSD	100.00	REG 6 PIN DIN	3.95	901229-05	15.85
APPLE 2E	450.00	12' 6 PIN DIN	7.95	7701/8701	9.85
1526/802	45.00	18' 6 PIN DIN	9.95	8721	16.85
MPS801	35.00	1 EEE TO EEE	19.95	8502	9.85
SFD 1001	85.00	1 EEE TO PET	19.95	82S100	13.85
	00.00	POWER SUP 64 WICO BAT HAN		6502	3.85
DEAD		WICO 3 WAY	18.95	6532 6520	6.29 3.85
64	40.00	WICO S WAT	11.95		3.85
1541	60.00	MEDIA MATE 5	7.25	6522	
MSD	75.00	TYMAC CONNE		6526 6567	14.85
SX64	100.00	FWI DSDD	8.95	6581	14.85 14.85
0		8050 OR 8032			10.85
MUST BE CO	OMPLETE	5.00	SHIPPING	4164	.99
		25.0	O MIN ORDER	74LS629	4.95
TC ELEC	IHON	ICS * 15.0	O APO AND		
HWY 36	PO 1	120 BUS	INESS EQUIPM	ENT OOO.	
11111 00	101	120		000	

35640

HARTSELLE, AL.

221-7770

SCUTTLEBUTT

ONLINE CASINO GAMES • RECIPE DATABASE • 64 REPLACEMENT CASE • DESKTOP PUBLISHING • 64 & AMIGA NETWORKING • LIGHT PENS • GRAPHICS EXCHANGE • PRINTERS • GAMES FROM MICROPROSE, EA, ACTIVISION, FIREBIRD • TYPING TUTORS • CALENDAR MAKER • COMPUTER LEARNING MONTH

NEWS FROM CES

As usual, June's Summer 1987 Consumer Electronics Show has yielded a huge amount of prerelease information on Commodore-compatible products, most of which we're passing along to you in this edition of *Scuttlebutt*. Only two generalizations could be made: compared to recent shows, this one was light on hardware and heavy on game software; and the Amiga has clearly continued to gain software support. Unless specified otherwise, the products listed below are scheduled to be in computer stores by the time these words reach you, or shortly thereafter.

DESKTOP PUBLISHING

The newest addition to the home computing lexicon: WYSIWYG. An acronym for "what you see is what you get," the term refers to the style of word processing required for desktop publishing, where you lay out your newsletter or document page onscreen. WYSIWYG with these three new entries, two for the 64 and one for the Amiga:


The *Timeworks Desktop Publisher* for the 64 offers typesetting features like kerning, italicizing, and underlining, page design capabilities like definition of margins and column width, drawing tools that utilize built-in patterns or your own, and the ability to import illustrations from leading graphics packages. Price to be announced.

Timeworks, 312-948-9200 (see address list, page 12).

geoPublish (\$59.00) provides GEOS users with multicolumn formats, multiple fonts, styles, and point sizes, integrated graphics that can be cropped, centered, or scaled to fit, and full page and "zoom" previews.

Berkeley Softworks, 415-644-0883 (see address list, page 12).

Vizawrite (\$149.95) lets Amiga own-



Build a newspaper or magazine empire. READER SERVICE NO. 214

ers transport images from most "Paint" programs into documents, then move and resize them via the mouse. Text is automatically set into pages, and documents retain information like author, creation date, and alteration count when saved. A glossary feature permits the insertion of frequently used phrases with one keystroke. Also included is a mailmerge facility.

Progressive Peripherals & Software, 303-825-4144 (see address list, page 12).

ALONE FOR THE FIRST TIME

Two light pens from Inkwell Systems: the new model 184-C (\$59.95) featuring a lightweight tri-lobular body and two touch-sensitive switches, and the industrial quality 170-C (\$99.95), an upgraded version of the model that until now was available exclusively with the *Flexidraw* graphics program. Improvements to the latter include nosetip actuated switch, enhanced circuitry, new case design, and a two-year

warranty.

Both pens are plug compatible with the Commodore 64 and the Amiga, are designed for single pixel resolution on monochrome or color CRT's, and can be used with a variety of software programs including *Flexidraw*, *Flexifont*, *Graphics Integrator 2*, *CADPAK 64* and *128*, *GEOS*, and *T.H.I.S.* Included with each is a technical manual and a C-64 demo program.

Additionally, *Flexidraw* has been made available for the first time without its light pen. 5.5, the latest version, includes data entry device support for the Koala Pad and the Commodore mouse and joysticks. Price is \$34.95.

Inkwell Systems, 619-268-8792 (see address list, page 12).

FOR GHOST WRITING?

The *Spirit-Writer* word processor (\$29.95) includes a 30,000 word spell checker (expandable to 40,000 words). Onscreen editing, justification, page numbering, variable fonts, line spacing, and other functions are supported. A single file can be up to 450 lines long. Shipping is free.

Free Spirit Software, Inc., 312-352-7323 (see address list, page 12).

TYPING PROGRAMS

Four new typing programs for the 64 and/or Amiga:

Typing Tutor IV (\$39.95) offers such enhancements over version III as a goals questionnaire that allows the program to tailor lessons and tests to your level, an instructor mode for classroom or corporate training, a Natural Language Generator that constructs words and phrases out of letters being learned, multiple standard speed tests, and a Letter Invaders game with improved graphic and sound.

Simon and Schuster, 212-373-8882 (see address list, page 12).

rai

pr

mac

lo

17

in

ne

ar

re

de

th

in

Type! (\$39.95) offers practice with real words and sentences, rather than random-letter drills. The program's diagnostics will display graphics and printouts of performance, and recommend exercises to improve speed and accuracy. Also included is Type!-Athlon, an arcade-style game.

Broderbund Software, Inc., 415-479-1700 (see address list, page 12).

Not one but two typing programs from EA:

Mavis Beacon Teaches Typing draws its lessons from a database of over 1000 passages from history's greatest writings (for youngsters, it's jokes, riddles, rhymes, and listings from The Guinness Book of World Records). Mavis "speaks" to her students in complete sentences as she analyzes typing errors and progress. Animated hands type in real time along with the student on a detailed onscreen keyboard. \$39.95 for the 64, \$44.95 for the Amiga.

Designed for adults, *IntelliType* (\$49.95) for the Amiga uses artificial intelligence and an adventure story to teach typing in 30 days. Each lesson offers the conclusion to the previous episode's cliffhanger ending. Students can learn to touch type or improve their current skills with thirty lessons.

Electronic Arts, 415-571-7171 (see address list, page 12).

TV DINNERS

The Great Chefs features the entire collection of recipes from the "Great Tastes of the Southwest" TV series that began airing on PBS in June 1987, plus recipes from previous aired segments. Each of the three volumes contains about 100 recipes, cooking tips and biographical information from the chefs, and menu planning and printer driving software. Volumes 1, 2, and 3 are \$24.95 each, or \$65.00 for the set.

Concept Development Associates, Inc., 904-825-0220 (see address list, page 12).

C-64 & AMIGA NETWORKING

geoNET will allow C-64 and 128 computers to be networked with an IBM PC, with the latter serving as a file and print server and each workstation consisting of a C-64, a monitor, and the geoNET interface card which contains a 512K RAM disk, the network I/Q hardware, and firmware to allow booting of the network. Each of the workstations can be monitored from the PC, and files easily transferred to and from the PC's hard disk.

No price had been set at press time. Berkeley Softworks, 415-644-0883 (see address list, page 12).

C Ltd has placed in the public domain a preliminary version of its SCSI-based Local Area Network, which makes it possible to connect several Amigas to a single mass storage device (hard drive, CD ROM, etc.). The complete system now being developed will connect Amigas to laser printers, WORM systems, and more. But the file server is available now on CompuServe in the Amiga Forum area (data library #DL-11 Search: "Multi-user).

C Ltd (see address list, page 12). CompuServe, 614-457-8600 (see address list, page 12).

TOY SHOP REDUCED

Broderbund has lowered the price of the C-64 version of *The Toy Shop* from \$59.95 to \$39.95, and that of the refill kit from \$24.95 to \$19.95.

Broderbund Software, Inc., 415-479-1700 (see address list, page 12).

COMPUTER LEARNING MONTH

October 1987 has been designated Computer Learning Month by a coalition of leaders in the computer and education fields, among them Apple and



cluded (Harness, Thoro, Greyhound), for one low price. But don't let the low price fool you. Systems III utilizes a

Introducing Race Analysis Systems III. As in all three in-

But don't let the low price fool you. Systems III utilizes a state-of-the-art Database Management System that is capable of storing the past performance lines of more than 2000 race entrants on a single 5½" floppy disk. With an average record retrieval time of only four seconds, fast, accurate handicapping is virtually guaranteed.

There is more. Systems III performs a Complete Wager Analysis™ on every race. Checking the viability of eleven different wager types. Pin-pointing the most efficient way to wager on a given race.

Other features include full support of the C-128's numeric key-pad; screen dumps to printer; betting tips; Quickcapper™ mode; built in fast-loader, and much, much more.

C-64/128 Disk ONLY \$49.95

RACE ANALYSIS SYSTEMS III

30 DAY MONEY BACK GUARANTEE

Race Analysis Systems III is part of The Alsoft Team of exceptional handicapping software. To Order: Ask your ocal retailer or call (412) 233-4659 for MasterCard & Visa orders. To order by mail send check or money order o ALSOFT, 305 Large Avenue, Clairton, PA 15025. Price includes shipping. All Orders are shipped within 24 lours of receipt.

IBM. The national nonprofit campaign will target the nation's schools, encouraging students, educators, parents, and community leaders to explore the potential of computers as learning tools. Planned activities include national student and teacher contests in computergenerated and computer-themed art, essays, and open-ended creative projects. Teachers may submit innovative lesson plans that use the computer to enhance learning. Prizes include Apple workstations and packages donated by software publishers. Deadline for entry is October 22.

Computer Learning Month, 202-223-4338 (see address list, page 12).

SLIMLINE 64

GEOS software notwithstanding, a 64C is practically worth the extra cost for the cosmetic improvement alone. Of course, love is blind, and many owners of standard 64's adore the computer's looks. But for the rest of us 64 owners who would almost prefer to type with the dust cover still on, a facelift is now available. Previously offered in Europe, the Slim Line 64 Replacement Case (\$34.95) offers the overall appearance of a 64C, including the lower profile and key height. The transformation requires 10 minutes and a Philips screwdriver.

Grapevine Data Products, 902-892-6372 (see address list, page 12).

NEW PRINTERS

The Commodore-compatible Okidata 180 printer (\$329) sports a push-button panel on the front that provides access to the most frequently used commands, including selection of pitch and print mode (NLQ, utility, or high speed modes, printing at 30, 120, and 180 characters per second respectively). A 2K buffer is standard.

Okidata, 609-235-2600 (see address list, page 12).

Featuring simple operation tailored to the computer novice, Seikosha's SP-180VC printer (\$249) outputs at 100 characters per second in draft mode and 20 in NLQ. Included are 129 characters and 68 graphic elements.

Seikosha America Inc., 201-529-4655 (see address list, page 12).

GRAPHICS INTERCHANGE

CompuServe's new Graphics Inter-



The Seikosha SP-180VC is designed specifically for the computer novice, with simple operation and streamlined design. READER SERVICE NO. 216

change Format will permit Amiga users to exchange high-resolution graphic images with Macintosh, Atari ST, and IBM PC owners. Typical uses will be the transfer of technical design diagrams, business charts and graphs, medical illustrations, computer art, and digitized photographs. Besides solving hardware incompatibility problems, GIF will compress images to reduce the file size needed by ½ to ¼, thus reducing transmission costs. Images can contain up to 256 simultaneous colors. The GIF program and sample files are available through the Amiga hardware forum on CompuServe.

CompuServe, 614-457-8600 (see address list, page 12).

SUPER GRAPHIX GOLD

pe

SI

op

Bl

on

ch

\$14

mi

tion

the

sio

figh

tles

to s

tatio

Super Graphix Gold (\$119.95) outperforms Xetec's pre-Gold interface with a 32K buffer, 8 switch-selectable operating modes, 32 printer choices, 16 active DIP switches, RESET and CLEAR buttons, LEDs to indicate activity and errors, direct-from-disk downloads and dumps, 21 secondary addresses, 12 printing channels, command channel with over 35 commands, banner channel, 4 new channels for downloading and printing fonts, pictures, and directories, and 2 built-in screen dumps with 16 sizes and 4 shades. There are 4 built-in and 4 downloadable fonts, all supporting underlining, italicizing, boldfacing, super/



The Okidata 180 offers pushbutton control of line/form feeds, print mode and pitch selection, etc. on its front panel. READER SERVICE NO. 217

subscribing and 9 pitches.

Xetec, Inc., 913-827-0685 (see address list, page 12).

Q-LINK CASINO GAMES


Rabbit Jack's Casino Games will allow QuantumLink subscribers to compete against one another in an online casino in Bingo, Blackjack, Poker, and Slot Machines. Players can raise their opponents in Poker, double down in Blackjack, play full-card Bingo, and bet on three lines in Slot Machines while chatting with their opponents. All four games are packaged on a disk that costs \$14.95; the usual service fee of 6¢ per minute is charged to players.

Quantum Computer Services, 703-448-8700 (see address list, page 12).

ging by changing weather conditions and the unique properties of the barques, loops, frigates, and galleons of the era.

Project: Stealth Fighter (\$39.95) features an advanced cockpit with two multipurpose display screens, radar scope, and 3-D out-the-window viewing with a superimposed "heads-up" display. The pilot must maintain a low electromagnetic profile and use the latest in armament and reconnaissance technology while manipulating more than 30 separate controls.

Uncharacteristically for a Micro-Prose game, Airborne Ranger (\$34.95) involves neither a plane, helicopter, or submarine. Instead it parachutes the player into enemy territory where he

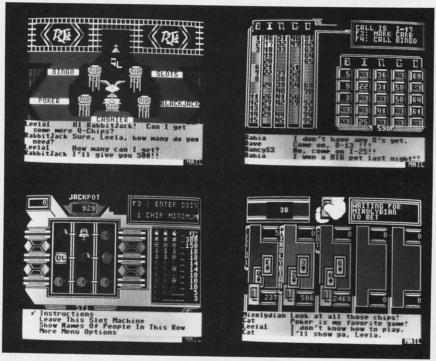

QuantumLink subscribers will be awarded chips for playing Rabbit Jack's Casino Games whenever they sign on. READER SERVICE NO. 218

GAMES

For the C-64 from MicroProse: Billed as the first adventure/simulation, Pirates! (\$39.95) takes place in the taverns of exotic ports, in the mansions of governors, and on the open seas of the Spanish Main. The game engages players in simulated sword fights, ship to ship duels, and land battles in their roles as English, French,

Dutch, or Spanish buccaneers trying

to seize fortune and build their repu-

tations. Sailing is made more challen-

must outmaneuver and outperform hostile troops on patrol or hidden in bunkers, machine gun nests, and armored cars. The joystick-controlled soldier evades the enemy across a 3-D terrain, crawling or running through ditches and ravines, armed with a submachine gun and grenades.

MicroProse Simulation Software, 301-771-1151 (see address list, page 12).

The C-64 adaptation of Blue Powder Grey Smoke (\$49.95) attempts to combine elements of an action simulation with the depth of a wargame. A

CLOSEOUT OF LUCASFILM GAMES™ BY EPYX



4 COMPUTER GAN

Take advantage of this closeout from Epvx® on 4 Computer Games! Set yields adventure, strategy, fantasy, and action. Each game has realistic 3-dimensional graphics. Plus, all four are compatible with Commodore® 64, 128 and Atari®. Get in on the fun, order this factory new set NOW!

- The Eidolon™: Control the amazing 19th century machine.
- Koronis Rift": Take part in a daring raid to claim exotic ancient technologies.
- Rescue on Fractalus™: Enter a hostile planet to rescue stranded pilots.
- Ballblazer™: Play a fast 31st century sport. For two players.

90-Day Limited Factory Warranty.

List: \$159.80 **Liquidation Price** For Four . . .

Item H-2615-7166-499 S/H: \$5.00/set

Credit card customers can order by

Toll-Free: 1-800-328-0609

ales outside the 48 contiguous states are subject to special conditions. Please call or write to inquire.

Item H-2615 C.O.M.B. Direct Marketing Corp. 1405 Xenium Lane N/Minneapolis, MN 55441-4494

Send __Computer Software Game Set(s) Item H-2615-7166-499 at \$29 per set, plus \$5 per set for ship, handling. (Minnesota residents add 6% sales tax. Sorry, no C.O.D. orders.)

		paid by che		vo delays in
PLEASE CHECK:	□ VISA		DICEME	
Acct. No.			E	хр
PLEASE	PRINT CLEA	ARLY		
Name _				
Address				
City				
State			ZIP	
Phor	ne()		
Sign	Here			Later 1



Direct Marketing Corp. zoom-in feature permits closeup combat display.

Garde Games of Distinction, 203-245-9089 (see address list, below).

The NBA (\$39.95) statistical basketball game lets C-64 coaches combine players of the past and present as they select lineups, make substitutions, and call plays. 20 teams are included, ranging from the '59-'60 Celtics to the four top teams of the '85- '86 season. An animation feature allows plays to be reenacted by all 10 players, and a statkeeper program updates players' performances throughout the game. A selection of accessory disks will be made available.

The Avalon Hill Game Company, 301-254-9200 (see address list, below).

New from Activision:

The comedy-adventure Maniac Mansion (\$34.95) contains 55 3-D rooms and areas full of mental challenges. More than 450 objects can be manipulated by the player to solve mysteries. At least five successful endings are possible.



No soreheads we-here's Activision's The Last Ninja in extra large size, even READER SERVICE NO. 219 though we were first with the title.

As The Last Ninja (\$34.95), you must retrieve the sacred scrolls of the White Ninja which a power-hungry

shogun has stolen and brought to his island stronghold. You'll advance through six levels of difficulty across

WIN THE LOTTO With Your Computer!

Forget random numbers. This program for home computers does an actual analysis of the past winning numbers. This amazing program will quickly provide you with all the data you need to predict which numbers will likely come up in subsequent drawings. All consistent lottery winners use some kind of system based on the past winners. Using the real power of your computer gives you a definite edge. It's menu driven and all you do is add the latest winners each week and the program does the rest in seconds. On screen or printer it shows hot and cold numbers, frequency, groups, sums-ofdigits, odd/even, wheels numbers and more. No thick manual to read. It even

Ask your software dealer or call or write:



has a built-in tutorial.

SOFT-BYTE P.O. Box 556 F. Park Dayton, Ohio 45405 (513) 233-2200

THE LOTTO PROGRAM is designed for all & 7 draw lotto games (up to 49 numbers)!

DON'T PLAY LOTTO WITHOUT IT! APPLE & M/S DOS IBM COMMODORE & ATARI 21.95 TRS-80 & MOD III. IV MACINTOSH (super version) 29.95

Reader Service No. 212

Please add \$2.00 shipping/ handling. Fast service on



Activision, Inc. **Companies** 2350 Bayshore Parkway Mountain View, CA 94043 **Mentioned** in Phone: 415-960-0410 Berkeley Softworks Scuttlebutt

2150 Shattuck Avenue Berkeley, CA 94704 Phone: 415-644-0883

Broderbund Software, Inc. 17 Paul Drive

San Rafael, CA 94903-2101 Phone: 415-479-1170

723 East Skinner Wichita, KS 67211 Phone: 316-267-6321

CompuServe

5000 Arlington Centre Blvd. Columbus, OH 43220 Phone: 614-457-8600

Computer Learning Month P.O. Box 19763

Washington, D.C. 20036-0763 Phone: 202-223-4338

Concept Development Assoc. 45 Cordova Street

St. Augustine, FL 32084 Phone: 904-825-0220

Electronic Arts 1820 Gateway Drive San Mateo, CA 94404 Phone: 415-571-7171

Epyx, Inc. 600 Galveston Drive Redwood City, CA 94063 Phone: 415-366-0606

Eurosoft International 114 East Avenue Norwalk, CT 06851

Phone: 203-838-9890

Firehird

P.O. Box 49 Ramsey, NJ 07446

Free Spirit Software, Inc.

538 S. Edgewood LaGrange, IL 60525 Phone: 312-352-7323

Garde Games of Distinction 8 Bishop Lane

Madison, CT 06443 Phone: 203-245-9089

Grapevine Data Products P.O. Box 1886

Charlottetown, P.E.I. Canada C1A 7N5 Phone: 902-892-6372

Inkwell Systems P.O. Box 85152 MB290

5710 Ruffin Road San Diego, CA 92138 Phone: 619-268-8792

MicroProse Software 120 Lakefront Drive Hunt Valley, MD 21030 Phone: 301-771-1151

Okidata

532 Fellowship Road Mt. Laurel, NJ 08054 Phone: 609-235-2600

Progressive Peripherals 464 Kalamath Street

Denver, CO 80204 Phone: 303-825-4144

OuantumLink 8620 Westwood Center Drive Vienna, VA 22180

Phone: 800-392-8200 Seikosha America Inc. IIII Macarthur Blvd. Mahwah, NJ 07430

Phone: 201-529-4655 ShareData

7400 W. Detroit Street Chandler, AZ 85226 Phone: 602-961-7519

Simon & Schuster One Gulf+Western Plaza New York, NY 10023 Phone: 212-333-3397

The Avalon Hill Game Co. 4517 Harford Road Baltimore, MD 21214

Timeworks

444 Lake Cook Road Deerfield, IL 60015 Phone: 312-948-9200

Phone: 301-254-9200

Xetec, Inc. 2804 Arnold Road Salina, KS 67401 Phone: 913-827-0685 Basic 12 Basic 64 Cadpak 1 Cadpak 6 Chartpak Chartpak Cobol 64 Cobol 12 Speed Te Super C (Super Pa

Where in is Carm P/S Libra Print Sho Print Shor Toy Shop P/S Holid

Box Score General M Micro Lea Team Dis

Axiom Eli

Brother 1

Commodo Commodo Epson 18 Epson 85 Epson my Epson my Gorilla Ba Juki 600 Juki 610 Legend 8 MPS 801 MPS 803 OKI 182, OKI 82, 9 SG 10-15 Panasoni

Enchante Hitchhike Hollywood Invisiclue Leather 6 of Phob Spellbrea Trinity 1 Zork 1-2

Karate C Kung Fu Tag Tean

Sorcerer

Baseball Basketba Football.

718 10A

"SOMETHING TO BYTE INTO"

ABACUS	PRECISION	DATASOFT	ACCOLADE
Basic 128. \$38.95 Basic 64. 25.75 Cadpak 128 38.95 Cadpak 64. 25.95	Superbase 128 \$56.95 Superbase 64 46.95 Superscript 128 47.95 Superscript 64 46.95	Alternate Reality \$24.95 Black Magic 16.95 Crosscheck 19.95	Dambusters \$18.95 Fight Night 18.95 Hard Ball 18.95 Law of the West 18.95
Chartpak 128 25.95 Chartpak 64 25.95 Cobol 64 25.95 Cobol 128 37.95	TIMEWORKS Data Manager 128\$42.95	Goonies 18.95 Mercenary 18.95 Mind Pursuit 18.95 Never Ending Story 18.95	PSI 5 Trading Comp. 18.95 Kill Until Dead 18.95 Ace of Aces 18.95 Deceptor 12.95
Speed Term 25.95 Super C Compiler 64/128 38.95 Super Pascal 48.95	Data Manager II. 29.95 Partner 128. 42.95 Swift Calc 128 w/Sideways. 42.95 Swift Calc 64 w/Sideways. 29.95	Gunslinger	Comics
Where in the World is Carmen Sandiago \$21.95	Word Writer 128 w/Speller 42.95 Word Writer 3 w/Speller 29.95 Partner 641 38.95	ACCESSORIES	Alter Ego
P/S Library 1-2-3 ea. 15.95 Print Shop 26.95 Print Shop Companion 21.95	DIGITAL SOLUTIONS Pocket Writer II 41.95	AICP Disks (12) \$ 7.95 Commodore 1351 mouse 45.95 Commodore 1670 modem . 135.95	Gamemaker Sci/Fiction
Toy Shop	Super Pak 64 34.95 Super Pak 128 44.95	Disk Notcher 5.95 Disk Storage Case (70) 8.95 Drive Cleaner 7.95	Labyrinth 21.95 Mindshadow 19.95 Murder on the Mississippi 21.95 Music Studio 21.95
Box Score/Stat Compiler \$16.95 General Manager Disk 24.95 Micro League Baseball 24 95	MICROPROSE Conflict in Vietnam	Flexidraw Light Pen	Rocky Horrow Show
Team Disks	F-15 Strike Eagle	Joystick	Titanic
(Min. 6 per order) Axiom Elite 5 LCD\$ 5.95	Top Gunner 18.95	Xetek Graphic Interface 54.95 Xetek Graphic Jr 34.95	Fast Load
Brother 15, 25, 35. 5.95 Commodore 1525. 6.95 Commodore 1526. 6.95	SPRINGBOARD Certificate Maker \$29.95 Clip Art I 20.95	ELA SOO OF	Programmers Toll Kit 27.95 Vorpal
Epson 185	Clip Art II. 24.95 Clip Art III. 24.95 Newsroom 29.95	America's Cup. \$22.95 Artic Fox. 22.95 Auto Duel 34.95 Bard's Tale 24.95	Championship
Epson mx, fx, rx 80	Graphic Expander	Bard's Tale II	Super Cycle 24.95 World Games 24.95 World's Greatest 24.95 Football 24.95
Juki 6100 3.95 Legend 880, 1080, 808 6.95 MPS 801 6.95 MPS 803 6.95	Leader Board	Marble Madness 21.95 Mind Mirror 21.95 Moebius 26.95	Movie Monster
OKI 182, 192	Mach 5 21.95 10th Frame 24.95 Triple Pack 14.95	Movie Maker 24,95 Murder Party 29,95 Orge 26,95 Ouizam 21,95	Destroyer
Panasonic 1081, 1091 8.95	World Class Leader Board 25.95	Scrabble	Elite\$19.95
Enchanter	HOT SELLERS Commando \$21.95	Ultima IV 39.95 Ultimate Wizard 22.95	Colossus Chess-IV
Hollywood Hijinx	Fist II. 19.95 Gato 19.95 Ghosts-n-Goblins 19.95 Kung Fu II. 19.95	MINDSCAPE Bop and Wrestle\$18.95 Fairlight18.95	StarGlider 24.95 Tracker 24.95
Spellbreaker 26.95 Trinity 128 24.95 Zork 1-2-3 ea 25.95	Parallax	High Roller	Battle of Antietam \$29.95 Carrier Force 36.95 Phantasie II 24.95
Sorcerer 24.95 DATAEAST	Yie Ar Kung Fu 19.95 Star Fleet 1 29.95 Strike Force Cobra 13.95	Lords of Midnight 17.95 BERKELEY SOFTWARE	Rings of Zelphin 24.95 Wizard's Crown 24.95 Roadwar 2000 24.95
Commando \$21.95 Karate Champ 21.95 Kung Fu Master 21.95	Tag Team Wrestling 21.95 Uchi Mata 19.95 Uridium 19.95	GEOS	SUBLOGIC Flight Sim II\$34.95
Tag Team Wrestling 21.95	X-15 Alpha Mission 19.95	GEOS Desk Pack. 22.95 Geodex 24.95 Writer Work Shop 31.95	Football
GAMESTAR Baseball \$21.95	AVALON HILL Superbowl Sunday \$10.05	SOLID STATE SOFTWARE	Pure Stat Baseball
Basketball 2 on 2	Superbowl Sunday. \$19.95 S.B. Sunday Stat Compiler . 16.95 Team Disk	VizaStar 128. \$69.95 VizaWrite 128. 59.95	Scenery Disk # 7 14.95 Stadium Disk (baseball) 14.95 Up Periscope 18.95

CALL US TOLL FREE Orders 1-800-634-AICP Only

Customer Service 718-351-1864 & 10AM to 6PM E.S.T.



AMERICAN INTERNATIONAL COMPUTER PRODUCTS

P.O. Box 1758 Staten Island, N.Y. 10314

Reader Service No. 179

In stock items shipped within 24 hours for prepaid orders (cert. Check, visa, mc) C.O.D. Orders accpeted, please add \$4.00, must be cash or cert. check ONLY. NYS residents add 8 % sales tax. Advertised prices reflect a 4% discount for cash, credit card add 4%. All orders add \$3.50 shipping and handling withing the Continental U.S. Personal checks allow 2 wk. for clearance. Availability and pricing subject to change without notice. Free shipping in Continental U.S. on software orders over \$150.00. DEFECTIVE EXCHANGE ONLY FOR SAME PRODUCT. Restocking fee on unopened no-defective items returned. Returns accepted within 15 days of shipping date only. All returns require Return Authorization numbers. WE DO NOT GUARANTEE COMPATIBILITY.

130 screens of 3-D graphics, searching for clues and food and solving problems. And, of course, use throwing stars, swords, nunchkus, staffs, spears, Ninja magic, and your karate skills to overcome armed guards, wild animals, and deadly traps.

From Activision's Gamestar subsidiary, Top Fuel Eliminator (\$29.95) simulates an entire season of drag racing. Players must fine tune their cars in the pit area, gun their engines properly to get off to a fast start, and shift gears in sync with their tachometers' RPMs to achieve maximum speed. Factors like engine failure, faulty traction, and improper shifting can affect the outcome of a race.

Four more additions to Activision's line of Solid Gold Software (that's Marketingese for "programs no longer moving at list price"): Hacker, Ghostbusters, Little Computer People, and The Great American Cross-Country Road Race. Each is \$14.95 for the 64; Amiga versions of Hacker and Little Computer People are \$24.95.

Finally, Activision will distribute a C-64 version of Book One: Secret of the Inner Sanctum, first in New World Computing's Might and Magic fantasy role playing series.

Activision, 415-960-0410 (see address list, page 12).

Firebird has adapted Starglider to Amiga format. The game requires you, as the driver of an airborne ground attack vehicle, to battle an almost invincible starship. Included are a flight training manual, full color poster, keyguide, and a 64-page novella. Price is \$44.95.

Firebird (see address list, page 12). From Electronic Arts:

Legacy of the Ancients (\$29.95) transports C-64 fantasy adventure fans to the world of Tarmalon, where they attempt to retrieve a leather scroll with evil powers. The search winds through 12 towns, forests, castles, and dungeons filled with dangerous creatures.

EOS: Earth Orbit Stations (\$34.95), a C-64 strategic simulation based on NASA's space development plans for

the next 50 years, puts players in charge of building and managing space stations among the planets and moons of the solar system, ultimately leading to the search for alien life. Up to 39 different mudules such as shuttleports, space telescopes, and chemical labs can be used to construct an infinite variety of stations. There are seven different replayable game scenarios which can last from 2 to 40 hours.

The Ferrari Formula One driving simulation (\$49.95) lets Amiga owners race a Ferrari F1/86 around 16 international race courses such as Monaco. Detroit, Monza, and Brands Hatch. The 16 tracks are authentic down to scenery and weather conditions, and the seven other racers are modeled after top contenders in the 1986 Formula One circuit.

The latest in EA's Amazing Software line for the 64: Sanxion (20 levels of 3-D landscapes and multiple waves of attackers), Delta Patrol (200 alien attack waves in over 50 environments), and on a single disk, Dragon's Lair I and II.

Amnesia, an interactive novel for the 64 by science fiction author Thomas Disch, puts the player in Manhattan without his memory but with a strange man who wants to kill him, a strange woman who wants to marry him, and a lot of other problems.

Age of Adventure (\$14.95) consists of two C-64 games: Return of Heracles (perform Herc's 12 labors while rescuing Helen of Troy) and Ali Baba and the Forty Thieves (battle over 100 different creatures en route to rescuing a beautiful princess).

On EA's drawing board is a Commodore adaptation of Chuck Yeager's Advanced Flight Simulator, just released in IBM format.

Electronic Arts, 415-571-7171 (see address list, page 12).

Yak's Progress (\$19.95) comprises eight C-64 games by British programmer Jeff Minter, including Revenge of the Mutant Camels. Most of the games revolve around the attempted domination of earth by the forces of Zzyax and Irata.

Eurosoft International, 203-838-9890 (see address list, page 12).

ShareData has released the first official versions of TV's three top game shows: Family Feud, Wheel of Fortune,



The money-saving subscription rates for Ahoy! magazine and the Ahoy! program disk are now even lower!

If you subscribe to the Ahoy! Disk Magazine - magazine and disk packaged together-you'll receive the two at substantial savings over the individual subscription prices!

YEARLY SINGLE SEPARATE **ISSUE PRICE** SUBSCRIPTION (12 ISSUES) PRICE (12 ISSUES) \$ 23.00 \$ 35.40 Magazine: Magazine: 597 \$107.40 \$ 79.95 Disk: Disk: TOTAL: \$142.80 TOTAL: \$102.95

Use the postpaid card bound between pages 66 and 67 of this magazine to subscribe. (Canadian and foreign prices are higher.)

The Ahoy! Disk Magazine is also available at Waldenbooks and B. Dalton's bookstores, as well as other fine software outlets.





ta-

of

TS.

an

ri-

er-

ch

to

nd

la

of

For use on your Commodore 64 or Commodore 128 computer

Three years of development and field testing by education experts have resulted in a series of software programs that are rich in educational content appropriate for both home and school use.

Selected titles from LADDERS TO LEARNING Series (over 50 titles in all) for beginning your home/school software collection:

- MOVING PICTURES (3-13 years) Create and animate a story using fabulous graphics (requires joystick).
- MEMORY TRAINER (8-10 years) Improve recall of numbers, words, lists, and shapes
- WORD POWER (8-10 years) Learn what a noun is, what it does, how to identify it and match correct meanings.
- COUNTING (3-6 years) A delightful introduction to counting and numbers using animation, superb graphics and captivating
- ADD/SUBTRACT I & II (6-9 years)
 Henry Hilo makes an interesting game out of presenting, reviewing, and testing basic addition and subtraction principles.
- SPATIAL RELATIONS (3-8 years)
 - Master concepts of perspective, distance, and size in this highly interactive program.
- FLYING INSTRUCTOR (10-15 years) Earn your Flight Certificate by mastering flight principles and experiencing "hands-on" airplane
- BONES AND JOINTS (10-15 years) Learn what bones are made of, their function, and about the joints which connect them.
- SORTING (6-8 years) Play the Great Sorting Game as a building block for math and logic skills
- MECHANICAL ENERGY (10-15 years) Learn the basic facts about kinetic and potential energy and conduct experiments in a laboratory



*Published by McGraw-Hill Book Company Australia Pty Limited Available from: COMBASE, INC., Suite 890, 333 Sibley Street, St. Paul, MN 55101 To order, send check or money order. Cost includes shipping and handling.

- MOVING PICTURES MEMORY TRAINER
- WORD POWER COUNTING
- ADD/SUBTRACT I&II (Specify #)
- PLEASE SEND COMPLETE CATALOG

SCHOOL & GOVERNMENT PURCHASE ORDERS ACCEPTED. 30-DAY RETURN GUARANTEE SUBJECT TO MERCHANDISE RETURNED IN SALEABLE CONDITION AND 10% RESTOCK EFF

The state of the s		
TOTAL DISKS ORDERED	AT \$19.95/DISK	

AMOUNT	ENCLOSED:	

Name	
Address	
City/State/Zip	

Telephone (

Reader Service No. 209

SPATIAL RELATIONS

FLYING INSTRUCTOR

BONES AND JOINTS

MECHANICAL ENERGY

SORTING

and Jeopardy. Each is for the C-64, and priced at \$9.99.

ShareData, 602-961-7519 (see address list, page 12).

From Broderbund:

Previously a hit in the UK, Cauldron (\$29.95) contains two complete quest games. In the first you take the part of a Witch Queen whose golden broom has been stolen by the Pumpking; in the second you're a loyal Pumpking warrior out to destroy the Witch Queen. The only way to win either contest is to collect ingredients to brew a magic spell in the cauldron.

Broderbund Software, 415-479-1700 (see address list, page 12).

GET ORGANIZED

Create a Calendar lets C-64 users make custom calendars with a variety of text, graphics, and borders. Graphics are included for birthdays, dental appointments, haircuts, and the like; graphics from Epyx's Scrapbook Collection and other Print Shop-compatible graphic disks can also be incorporated. Daily, weekly, and monthly calendars can be produced in sizes from 81/2 x 11" to a six-page horizontal ban-

ner. Multiple lines of text can be placed on any day, and events that occur at regular intervals, like a meeting on the second Tuesday of every month, can be repeated automatically.

Epyx, Inc., 415-366-0606 (see address list, page 12).

JULY 1987 W MERCLINE FOR

You can Create a Calendar one day at a time or automatically with the Master Calendar option which contains special events. READER SERVICE NO. 220


CRYSTALLUS

For the C-64 By Bob Blackmer

ou are trapped in a huge complex maze made up of 36 interconnecting cubicles. Each cubicle in the maze contains shimmering crystals that emit audible tones when gathered. These tones are then absorbed into the walls of the structure. When all the tones have sounded, the structure will echo the melody of tones, causing a secret passage to open. The passage will be visible in an outer wall at the top or bottom of the maze. As you leave the maze, you will enter the courtyard which is surrounded by a brick wall. Somewhere in this wall will be an opening, your final hurdle to escape from Crystallus.

This game is different from most in that there is no scoring involved. You merely must finish your task to escape from the maze that bars your freedom.

This program is a good example of how to achieve a three dimensional look to a game. The custom character graphics create a maze that shows the walls and tops of walls in contrasting colors and drawn at the proper angles. The sprite priority register is set to display behind the screen data.



Mia

SWII

DAT

WO

This gives the effect of depth as the sprite moves through the cubicles in the maze.

You will need a joystick in Port 2 to play the game. The music used in this program may be familiar to some readers: it's taken from "Opus 6 No. 1" by Fernando Sor.

Crystallus is written in machine language and must be entered using Flankspeed (see page 79). After entering and saving Crystallus, reset the computer and LOAD "CRYS-TALLUS", 8,1. Then SYS 49152 to start.

SEE PROGRAM LISTING ON PAGE 85

A Complete Pro Football **Prediction Program For The** 1987 NFL SEASON

61% + Accurate vs 'Line' in 1986

More In '87 To

BEAT THE SPREAD

★ FEATURES ★ ★

- Predicted Scores Each Week
- Season Schedule By Week
- Season Schedule By Team

- Scores By Week Scores By Team Win Loss Record Home/Away
- **Division Standings**
- Accumulated & Average Stats

- Line By Week Line By Team Record vs Line
- Record vs Common Opponents
- Individual Team Match-Ups Printed Copy All Screens 1983-1986 Data Base
- (Includes All of the Above)
- Easy Updates Playoffs/1988
- Not Copy Protected Dealer Inquiries Invited

7495 INCLUDES DISK AND DOCUMENTATION SPECIFY 5¼ OR 3½ DISK

- IBM, Tandy & Compatibles
- Commodore 64 128
- Apple II + IIc IIe IIgs
- TRS 80 MIII / IV

Stats Needed To Run Program Available In Local Newspapers Or We Will Furnish All Stats By 1st Class Mail. Season Price 4000

Our Bulletin Board Will Furnish All Stats, Lines, Predictions and Trends Updated Daily. Season Price 55°°. Program Comes Updated Thru Current Week of Season . . . No Extra Charge.

VISA"

ORDERS SHIPPED IN 2 DAYS PHONE LINES OPEN 24 HRS. ADD 3° SHIPPING & HANDLING

TOLL FREE — 800-722-2277 TEXAS COLL. — 214-586-8212

MARATHON SOFTWARE DEPT. A P. O. BOX 1349 — 641 FORT WORTH ST. **JACKSONVILLE, TEXAS 75766**

TOLL FREE & COLLECT FOR ORDERS ONLY

C.O.D.



S & S Wholesalers, Inc. 226 Lincoln Road Miami Beach, Florida 33139

S & S Wholesalers Sizzling Summer Sale

(800) 233-6345

These are Special Prices for AHOY Readers Only. Please Specify When Callina.

C128 COMPLITI

1890




*With Purchase of 1571 Disk Drive Freight Additional

64C COMPUTED



*With Purchase of Specially Priced Software Package Freight Additional

COMMODORE MP5803



0990

Freight Additional

12" Color Monitor



*Freight Additional

MASTERTRONIC

BMX RACER GOLDEN TALISMEN 5 A SIDE SOCCER SLUGGER (BASEBALL) SPEED KING VIDEO POKER ELEKTRAGLIDE MASTER OF MAGIC CHILLER HOLY GRAIL

SKYJET KICKSTART BLACK CRYSTAL ACTION BIKER LAST V8 SPACE HUNTER **BROADSTREET** FINDERS KEEPERS INSTANT RECALL

SPECIAL 20 TITLES FOR 79%

TIMEWOOKS

ZORKII

WICO JOYSTICKS

BLACK MAX 890 BOSS 1177 1477 **BAT HANDLE** 3 WAY 1977

ZAXXON

PODEYE

FLIGHT

By SubLogic

SCENERY DISKS AVAILABLE

SIMULATOR II

PARTNER 128 3490

SWIFTCALC 128 3490 DATA MANAGER 128 3490 3490 **WORD WRITER 128**

EWSROOM 2990

COMMODOREPC-10

FREIGHT ADDITIONAL

SUPER SPECIAL

KRAFTACE

GEOS

*With the Purchase of any other Berkley Program


COLOR PRINTER

*With Purchase of Plug-N-Print

HOOPS

For the C-64

By Tony Brantner

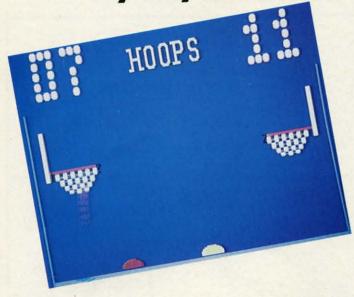

oops combines the games of basketball and computer pong into a fast action contest for one or two players.

Use Flankspeed (page 79) to type in and save a copy of Hoops. To run the program, type SYS 49152 and press RETURN to start.

When asked for the number of players, enter one or two from the keyboard. If you choose the one player game, you are also asked to select one of the six skill levels (warning: Level six is relentless!).

There are two paddles at the bottom of the screen. A joystick plugged into Port 2 controls the left paddle, while either a joystick plugged into Port 1, or the computer, controls the right paddle. Each paddle can be moved horizontally, but neither can cross the center of the screen.

The game begins with the ball being thrown into the air at center court. Use your paddle to hit the ball into the basket on your opponent's side. If you're not careful, you can ≤ knock the ball into your own basket, awarding a point to ₹ your opponent. One point is scored each time the ball drops & through the basket. Scores are shown at the top of the screen on the giant scoreboard. The first player to reach 21 points wins. You can then press either fire button to play a new SEE PROGRAM LISTING ON PAGE 82 game.

OWER RD SO GO HS OH AA TR

THE GREAT CONNECTION


300/1200 BAUD HAYES® COMPATIBLE MODEM

Get Connected with the NEW TCM-1200H 300/1200 baud Hayes® compatible modem for the Commodore® C-64 and C-128 computers.

Using the same technology and state-of-the-art circuitry that is used in our IBM® PC Half Card modem, the TCM-1200H was designed from the ground up to work with and enhance the C-64 and C-128 computers.

Compatibility-that describes the TCM-1200H. Just plug the connecting cable into the user port and you're all set. No RS-232 interface and no power supplies to plug in, The TCM-1200H derives its power from the computer.

- Compatibility with terminal software. Most of the popular terminal software already have provisions for Hayes type modems, just change the modem type to Hayes and you're ready.
- Compatibility with the popular Hayes "AT" commands. Unlike other so called Hayes compatible modems, the TCM-1200H is fully Hayes compatible.
- Compatibility with the FCC. The TCM-1200H is fully registered and type accepted with parts 68 and 15.



Feature for feature and dollar for dollar, the TCM-1200H is truly the best modem choice for your Commodore C-64 or C-128 computer.

For more information or to order the TCM-1200H, write or call: Trans Com, Inc. 703-13 Annoreno Dr., Addison, IL 60101

Phone (312) 543-9055

BBS (312) 543-0180

open Mon-Fri 8 30am - 6 30pm Sat 9 30am -

- 8pm Sat & Sun 9 30am - 7pm

PHONE and MAIL ORDERS
CALL TOLL FREE

IN NEW YORK STATE CALL (212)594-7140 (800)345--7059

ALL COMPUTERS & PERIPHERALS COME COMPLETE WIT AC ADAPTOR. OWNER'S MANUAL AND ALL CONNECTING CABLES.



ALL MERCHANDISE IS BRAND NEW AND FACTORY FRESH, COMPLETE WITH MFR. U.S.A. WARRANTY.

commodore C= 128=



128 K RAM Powered Personal Computer

nd

ne

ive

nd

WO

ou

g:

iir

S-

an ≤

to § ps ∝ w str W SZ ÖLÖHA \$235

commodore Cx 6400



64 K RAM With Geos Program! Home Computer \$14995 Powered

commodore PC10-1

,27411 IBM, PC/XT Compatable 512K Ram Expandable to 640K MS-DOS 3.2 Parallel and Serial Ports \$57995

Full 1 Year Warranty

PC10-2 640K Computer \$699 w/2 360K Drives...... \$699



commodore

COMPLETE

COMPUTER PACKAGES Get it all together & save!

COLOR CE BACKAGE



- Commodore 64C Computer
- Commodore 1541 c Disk Drive
- Commodore Color Printer Color Monitor

With Geos Program!

C= 64

COMPLETE **PACKAGE**



- Commodore 64 Computer
- Commodore 1541 Disk Drive
- · Commodore Color Printer

• 12" Monitor

\$36995

Same pkg. w/C-64C \$399.95

C= 128= PACKAGE



- Commodore 128 Computer
- *Commodore 1541 Disk Drive
- .12" Monitor
- *Commodore Color Printer

\$49995

To substitute 1571 for 1541 add \$65.00

Cx 1541C NEW Disk \$15995

DELUXE C 128 PACKAGE



- ·Commodore 128 Computer
- ·Commodore 1571 Disk Drive
- Commodore 1902 Color Monitor
- · Commodore 80 Column Printer

WE CARRY A FULL LINE OF SOFTWARE FOR COMMODORE COMPUTERS AT DISCOUNT PRICES! Call Toll Free to Order

Color Monitor

ADD \$130

COMPUTER PRINTERS

(commodore MPS-803C PRINTER



\$129⁹⁵ MPS-1000 PRINTER

MPS-1200 PRINTER

OKIDATA





STOR NEW! POWER TYPE Daisy Wheel Letter Quality

	\$469.95 SD-15	.\$399.95
	\$669.95 ND-15	\$419.95
	\$179.95 SR-10	\$429.95
	\$189.95 SR-15	\$469.95
NX-10C	199.95 NR-15	\$499.95
NX-15	\$309 95 NB-15	\$869.95
SD-10	\$249.95	
NL-10 w/C	\$249.95 ommodore Cart	\$249.95

EPSON HOME-WRITER 10 18995 with Interface LX-86 Printer.
FX-86 Printer.
FX-286E Printer.
LQ-800 Printer.
PANASONIC 10811 \$219.95 \$349.95 \$469.95



RGB Color Monitor Cx 1802 Color monitor \$4995 "Magic Cx Voice" Module \$3995 1351 Mouse for any Commodore Computer C= 1700 128K

C= 1571 Disk Drive



ı		\$34.9	į
ı	TU-803	34.9	į
ı	XETEC Jr. Interface	\$39.9	į
ı		\$59.9	
	ALTEC OIL MICHIGORIA		٦



PERIPHERALS

EPSON EQUITY I PACKAGE IBM PC/XT

COMPATIBLE

• Equity | Computer • 256K RAM Power • Dua! 360K Disk Drives • 12" High Resolution Monitor • Serial and Parallel Ports



SPECIAL

Blue Chip
Keyboard * 512K
Expandable to
640K · 6
Expansion SlotaOptional 20MB
Hard Drive · All
Hook—up Cables
& Adaptors Package of 10
Diskettes

C128 Power Supply......\$39.95 C64,C64-C Power Supply...\$29.95



EDUCATIONAL CUSTOMERS




Art Gallery Disk Sale

The images on these pages are now available on a monthly disk. Multicolor images are supplied in *Koala* format, while high-resolution images are in *DOODLE!* format. Included are a slide show for easy viewing, along with a bit map dump for your 1525 printer or properly interfaced equivalent. A sample *Art Gallery* disk with slide show and printer dumps is \$10; or send a stamped and self-addressed envelope (business size) for a listing of available *Art Gallery* collection disks. Prices shown are for US and Canada. All others add \$3 per disk. New York State residents please add appropriate sales taxes. Disks may be ordered from Morton Kevelson, P.O. Box 260, Homecrest Station, Brooklyn, NY 11229.

Contribute to Ahoy!'s Art Gallery


The Ahoy! Art Gallery offers the opportunity for fame and fortune to any and all aspiring Commodore artists. Simply send Morton (see address above) your work on disk indicating the drawing package or file format of the images. Inclusion of a self-addressed post card will guarantee an immediate response. All graphics produced on the C-64/ C-128, Plus/4, and Amiga computers are eligible. In exchange your work will receive the opportunity for display in these pages. All published works will receive royalties based on the monthly Art Gallery disk sales. Also, both published and unpublished images may be included on Art Gallery collection disks.

Note that the *Art Gallery* is not a contest. Published pictures are selected in an arbitrary and capricious fashion by the *Ahoy!* Art Director based solely on the artistic merit of the individual images.

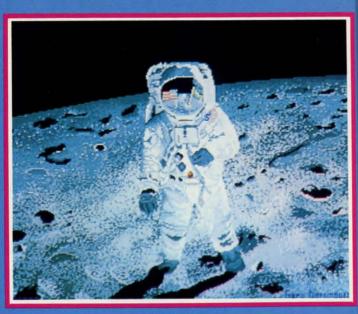








If contributors to Ahoy!'s Art Gallery were polled on their favorite graphics format, Koala would win paws down! All of this month's masterpieces were generated on Koala, with the exception of two Amiga images — can you spot them? Answer appears below. At lower left, catch the wave with Surf by Heinz Diekert (Vernon, BC). The column of three to the left includes, top to bottom, Moonwalker by Gary Dominguez (Oklahoma City, OK); Sail by the ever-popular Alberto Valsecchi (Milano, Italy), and San Francisco, also a la Dominguez. To the right is the shooting star of our show, Nova X by Tom Kane (Buffalo, NY), and below it, Cafe by A. Black (Santa Rosa, CA). The Amiga images were the two by Gary Dominguez.



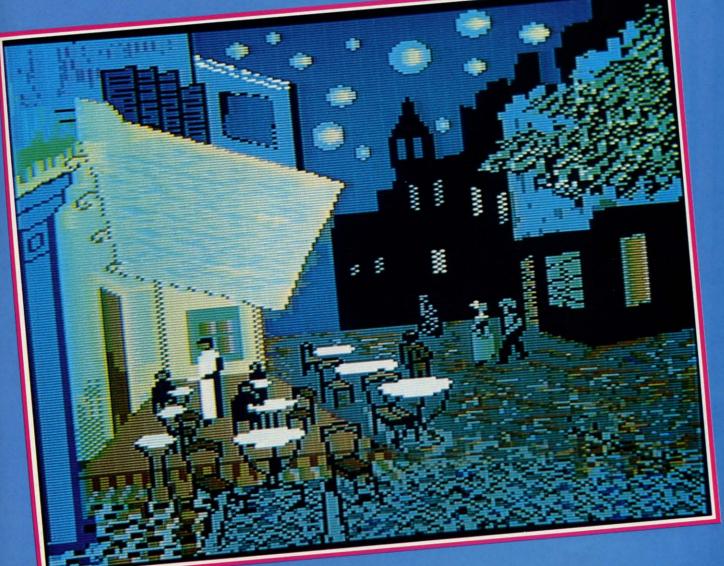



re your title screens leaving you a bit on the flat side? Or maybe you'd like to put a little more zip in your menus. Pretty colors and interesting graphics can help to pump them up, but sometimes even that's not quite enough. Without careful planning, title and help screens are about as exciting as a mud fence. However, there is an easy way to give a professional touch to your displays. If you've been looking for a way to add some pizzazz to the ol' mud fence, Centerfold is for you.

Centerfold gives the illusion of unfolding your screen from the inside out. Characters seem to spring forth from the center of the screen and race away from one another. It's as if the monitor's midsection were erupting with graphics, all charging toward the outer edges. Yet, when the unfold is complete, your original display is there intact, with each character retaining its own color. Centerfold works with all keyboard graphics, including custom characters. Here's how to use it.

After you save a copy of *Centerfold*, run it. The loader POKEs the machine language data into memory and checks for errors. Once the data is loaded, you're ready to go.

Centerfold can be operated automatically or manually. Automatic operation is handy when you're creating a screen display. Type SYS 49152 and press RETURN to activate it. Let's say you have a nifty little display on your monitor. All you have to do is take a "picture" of it. Just press the CONTROL and SHIFT keys at the same time. The screen border will flash when the picture has been taken. All the characters and their respective colors are now captured. Now press the CONTROL and COMMODORE keys together. You'll see your display unfold from the inside out. For a better illustration, clear the screen, then press the CONTROL and COMMODORE keys. Don't accidentally press the SHIFT key at this time or you'll capture a blank screen.

You can see a quick demonstration of *Centerfold* in action by listing it or whatever program is in memory. Now

take a picture. Next clear the screen, then do an unfold.

While in the automatic mode, *Centerfold* waits until the cursor is between flashes before taking a picture or unfolding the screen. This avoids having an unwanted footprint left by the cursor. So if nothing happens the instant you press the keys, it will very shortly.

To deactivate the automatic feature, press the RUN STOP/ RESTORE combination.

You can access the picture taking and unfolding routines by SYSing directly to them. Since a direct access will most likely be performed from within your programs, the cursor check and flash are bypassed. SYS 49394 takes the pictures and SYS 49246 folds the screen. For example, a line such as

100 SYS 49246

could unfold a title screen you had previously prepared. A line like


200 SYS 49394

would take a picture of the current screen display. Later your program could unfold it. You can create a lot of interesting visuals this way.

Whenever a picture is taken, the information is stored in memory from 49664 (\$C200 hex) to 51712 (\$CA00 hex). You can save different screens to disk or tape and recall them later for use in various situations and programs. *Data Express* (July '87 *Ahoy!*) will make the binary saves for you. Or you can use a machine language monitor. Use the above locations as the starting and ending addresses.

Experiment with *Centerfold*. It really is an exciting effect that will add a new dimension to your programs. With a little practice, you'll discover a whole new realm of possibilities with your screen displays.

SEE PROGRAM LISTING ON PAGE 84

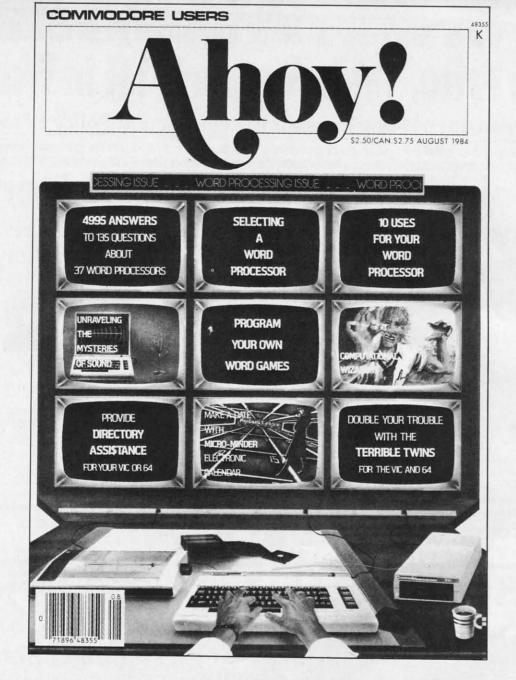

☐ Twelve Issues for \$23.00 (\$30.00 Canada and Elsewhere ☐ Twenty-four Issues for \$44.00 (\$55.00 Canada and Elsewhere	
☐ Twelve Issues for \$23.00 (\$30.00 Canada and Elsewhere	
	1
☐ Twenty-four Issues for \$44.00 (\$55.00 Canada and Elsewh	
	ere)
me	
dress	
yStateZip	
Send coupon or facsimile to:	
ION INTERNATIONAL INC.	
45 West 34th Street, Room 500, New York, NY 10001	

We Won't Be UNDERSOLD 1st In Price, 1st In Support, 1st In Warranty

15 Day Free Trial • 90 Day Immediate Replacement Policy • Free Catalogs Call before you order, our prices may be lower • All sale prices expire 9-30-87

80 Column Printer • 81/2" Letter Size

Big Blue Printer



- Dot Matrix
- Heat Transfer
- Upper Case
- Lower Case
- Underline
- Enlarged
- Graphics
- Plus Much More

No One Sells This **Printer For Less!**

Sale

List \$199

(Add \$7.50 Shipping*)

This printer was made by Canon® for the IBM PC and PCjr. The Big Blue printer comes ready to hook up to the serial port of the IBM®PC jr. Plus with low cost adapter cables you can connect the Big Blue printer to the Apple II, IIe, IIc, Apple Compatibles, Atari , Commodore 64, 128, SX-64, Vic 20, Plus 4, IBM®PC, IBM®XT, IBM®AT, IBM Compatibles, TI-99, Tandy 1000, plus many more.

Intelligent Commodore® Interface List \$49.95 Sale \$19.95 Intelligent Atari® Interface..... List \$49.95 Sale \$19.95

RS-232 Adapter (specify male or female)..... List \$19.95 Sale \$ 9.95 Paper (2 Rolls) List \$19.95 Sale \$ 5.95 Laser128, Apple® IIc Interface...... List \$24.95 Sale \$12.95 Single Sheet Paper (Qty. 500)..... List \$29.95 Sale \$12.95

IBM, Apple, Canon, Commodore, Atari & Laser are registered trademarks of International Business Machines, Apple Computer, Canon Inc, Commodore Business Machines, Atari Inc. & Video Technologies Respectively


51/4" Floppy Disk Sale
Double-Sided • Double-Density • 100% Certified 24° each *

*1 Box of 100 — \$24.00 (24° each)

Paper Economy Sleeves (100) - \$5.00

Hi-Speed (160-180 CPS) Printer

NLQ-180 Printer



Letter Quality

No One Sells This **Printer For Less!**

Sale S

Lifetime Warranty' List \$499

(Add \$10.00 Shipping*)

- Near Letter Quality Selectable From Front Panel Controls
 High Speed Dot Matrix
- Letter Quality Modes
 8K Buffer frees up computer 4-times faster
 Super Graphics
- Pica, Elite, Italics, Condensed
 Business or Personal
 Tractor/Friction
 15 Day Free Trial Lifetime Warranty on Print Head* • 6 Month Immediate Replacement Policy •

INTERFACES

IBM \$24.95 Apple II \$44.95 Laser 128 \$19.95 Commodore \$29.95 Atari \$39.95 Macintosh \$49.95

COMPUTER DIRECT (A Division of **PROTECTO**)

22292 N. Pepper Rd., Barrington, IL. 60010

312/382-5244 or 312/382-5050

We Love Our Customers

* Illinois residents add 61/2 % sales tax. All orders must be in U.S. Dollars. We ship to all points in the U.S., CANADA, PUERTO RICO & APO-FPO. Please call for charges outside continental U.S. or C.O.D. MAIL ORDERS enclose cashier check, money order or personal check. Allow 14 days delivery, 2 to 7 for phone orders and 1 day express mail. Prices and availability subject to change without notice. (Monitors only shipped in continental U.S.)

VISA — MASTERCARD — C.O.D.

VISA - MASTERCARD - C.O.D.

15 E

Cor

We Won't Be UNDERSOLD

15 Day Free Trial • 90 Day Immediate Replacement Policy • Free Catalogs

Call before you order, our prices may be lower • Sale prices expire 9-30-87

Complete C-64 System

Computer, Drive, Monitor & Printer

Sale

)-87

K-64

9.95 5.95 12.95

ch)

5.00



Complete Atari System Computer, Drive, Monitor & Printer



Sale

List \$1124

All this for '3	99
-----------------	----

List \$1045

	-
	-

	Commodore 64 Computer	
ľ	Commodore 64 Computer	\$29900
ı	Commodore 1541c Disk Drive	\$22900
	• Hi-Res 12" Monochrome Monitor	\$24900
	Monitor Cable	\$ 1995
	• Big Blue 81/2" Printer with	\$19900
	Interface and 2 rolls of paper	\$ 4095

Total Prices

\$104590

All this for '399	List
Atari 130XE Computer	\$24900
Atari 1050 Disk Drive	\$29900
Hi-Res 12" Monochrome Monitor Monitor Cable	\$24900
• Big Blue 81/2" Printer with Interface and 2 rolls of paper	\$19900 \$ 4995
Premium Word Processor	\$ 5995

Total Prices

\$112485

Complete Apple® **Compatible System**

Computer, Drive, Monitor, Printer & Software



shipping per each system ·

Complete IBM® XT Compatible System

Computer, Drive, Monitor, Printer & Software



All this for only '499:

List \$1228 Laser 128K Computer Video, parallel & serial ports included

- Runs virtually all Apple II/IIc/IIe software Hi Res 12" Monochrome Monitor
- Big Blue 8½" Printer with interface and paper
- Software Package: word processor, spreadsheet & data entry

Apple® is the registered trademark of Apple Computers Inc.

All this for only '599:

- 10 MHz / 512K Super Turbo XT Computer Video, parallel & serial cards included
- 3.2 MS DOS & G.W. Basic included
- Hi-Res 12" Monochrome Monitor
- Big Blue 8½" Printer with interface and paper
- Software Package: word processor, spreadsheet & data base

IBM® is the registered trademark of International Business Machine



For Atari & Commodore

For IBM & Apple

Reader Service No. 193



22292 N. Pepper Road Barrington, IL. 60010 We Love Our Customers

We Won't Be UNDERSOLD 1st In Price, 1st In Support, 1st In Warranty


15 Day Free Trial • 90 Day Immediate Replacement Policy • Free Catalogs Call before you order, our prices may be lower • All sale prices expire 9-30-87

Comstar Aero Printer | Comstar 1

List \$349 (Add \$10.00 shipping.*) 150-170 CPS

• 150 -170 CPS • Impact Dot Matrix 10" Carriage • Underlining • Super & Subscript Elite, Condensed, Emphasized, and Enlarged Centronics Parallel Port and Much More

List \$499



(Add \$10.00 shipping.*)

Superb **Near Letter** Quality

 100 CPS Impact Dot Matrix • Underline Double Strike
 Superb Near Letter Quality Pica, Elite, Condensed, Italics • Super/Subscript 10" Carriage
 Plus Much More

Daisy Wheel Printer/Typewriter

List \$299 (Add \$12.00 shipping.*)

- Drop-in Cassette Ribbon Key in Buffer
- Automatic Centering 12" Large Carriage Superb Letter Quality Correspondence
- Centronics Parallel Port
 Plus Much More

Electronic Compact Printer/Typewriter

Sale

List \$399

(Add \$12.00 shipping.*)



Spell

 90,000 Word Dictionary
 Centronics Parallel Port LED Readout Flags Mistakes Before They Reach Print • 1 Line/ 240 Character Automatic Correction Free 4K Memory Card Stores 4,000 Characters

COMPUTER DIRECT (A Division of **PROTECTO**)

22292 N. Pepper Rd., Barrington, IL. 60010 312/382-5050 or 312/382-5244

We Love Our Customers Reader Service No. 193

* Illinois residents add 6½% sales tax. All orders must be in U.S. Dollars. We ship to all points in the U.S., CANADA, PUERTO RICO & APO-FPO. Please call for charges outside continental U.S. or C.O.D. MAIL ORDERS enclose cashier check, money order or personal check. Allow 14 days delivery, 2 to 7 for phone orders and 1 day express mail. Prices and availability subject to charge without notice. (Monitors only shipped in continental U.S.)

VISA - MASTERCARD - C.O.D.

We Won't Be UNDERSOLD

15 Day Free Trial • 90 Day Immediate Replacement Policy • Free Catalogs
Call before you order, our prices may be lower • Sale prices expire 9-30-87

13" Color Monitor

Removable Anti-Glare Screen



Sale &

er

ript


Sale \$ 159

Add \$14.50 shipping and handling.*

List \$329

14" RGB & Composite Color Monitor

Plus Green Screen Option Switch.



Esale &

Sale \$237

Add \$14.50 shipping and handling.* List \$39

Magnavox TV Tuner

• UHF/VHF • Front Panel Programmable Selection Buttons • Rabbit Ear Antenna • Fine Tuning And More



Sale \$59

Add \$3.00 shipping and handling.*

List \$130

Remote Control TV Tuner

Works with Monitor/TV • Sleep Timer • Access to 139
 VHF/UHF/Cable Channels • Signal Booster • Quartz
 Frequency Synthesized Tuner And More



\$**99**

Add \$3.00 shipping and handling.*

List \$180



(312) 382-5244 For Atari & Commodore

(312)382-5050

Call

For IBM & Apple

Reader Service No. 193



Mail

COMPUTER DIRECT

22292 N. Pepper Road Barrington, IL. 60010 We Love Our Customers

We Won't Be UND 1st In Price, 1st In Support, 1st In Warranty

15 Day Free Trial • 90 Day Immediate Replacement Policy • Free Catalogs Call before you order, our prices may be lower • All sale prices expire 9-30-87

Full Size Piano/Organ Keyboard

Now With Conductor Software FREE!

With this 40 key (A-C) professional guage spring loaded keyboard, and the FREE Conductor Software included, you can play, record, compose and accomplish just about any musical feat from Bach to Rock. The built-in interface plugs right in to the joystick port of your Commodore 64/128. Just load the FREE Conductor Software (A \$19.95 Value) and your on your way!

 Adjust the keyboard to just about any instrument or sound you want
 Teaches you how to play: from scales to any of the 35 pre-recorded songs • Record and play back tracks untill your composition is complete • Plus much More

The Music Teacher

This Program teaches a beginner how to read music and play it correctly in rhythm on the keyboard. Features trumpet, organ, violin, synthesizer instrument sounds, built-in metronome, pause-play control and set-up menu for cusomizing the music teacher. (Disk) List \$39.95 Sale \$24.95

The Printed Song

With this program you can print out, in music notation, your compostition for others to read or play. Requires The Conductor Program and printer compatible with the Commodore graphics mode such most dot matrix printers with a Commodore graphics interface. (Disk) List \$29.95 Sale \$19.95



51/4" Floppy Disk Sale

Double Sided / Double Density

100% CERTIFICATION TEST

Each disk is individually checked so you will never experience data or program loss during your lifetime!

FREE REPLACEMENT LIFETIME WARRANTY

We are so sure of these disks that we give you a free replacement warranty against failure to perform due to faulty materials or workmanship for as long as you own your disks.

AUTOMATIC DUST REMOVER

The smooth surface finish saves disk drive head wear during the life of the disk. (A rough surface will grind your disk drive head like sandpaper). The lint free automatic cleaning liner makes sure dust & dirt are being constantly removed during disk operation.



Sale *

1 Box of 10 — \$3.90 (39° ea.)

1 Box of 50 — \$14.50 (29° ea.) * 1Box of 100 — \$24.00 (24° ea.)

0029 Paper Economy Sleeves (10) 50°

0030 Paper Economy Sleeves (100) \$5.00

COMPUTER DIRECT (A Division of **PROTECTO**)

22292 N. Pepper Rd., Barrington, IL. 60010

312/382-5244 or 312/382-5050

We Love Our Customers Reader Service No. 193

* Illinois residents add 6½% sales tax. All orders must be in U.S. Dollars. We ship to all points in the U.S., CANADA, PUERTO RICO & APO-FPO. Please call for charges outside continental U.S. or C.O.D. MAIL ORDERS enclose cashier check, money order or personal check. Allow 14 days delivery, 2 to 7 for phone orders and 1 day express mail. Prices and availability subject to change without notice. (Monitors only shipped in continental U.S.)

VISA - MASTERCARD - C.O.D.

We Won't Be UNDERSOLD

15 Day Free Trial • 90 Day Immediate Replacement Policy • Free Catalogs Call before you order, our prices may be lower • Sale prices expire 9-30-87

C64c Compu



Included with each computer is the GEOS Program: word processor and a versatile drawing program.

(Add \$10.00 shipping.*)

Pro 20 Letter Quality Daisy Wheel Printer



(Add \$10.00 shipping.*)

ogs

ctor hics

List \$499

* With purchase of the game Trivia Fever, computerized trivia, at our sale price of \$29.95



(Add \$10.00 shipping.*)

List \$249

Modem Package

1200/300 Baud Auto Dial/Answer



AutoCom Software Included • File

Transfer • Tone/Pulse/Keyboard Dialing • Download Text/Data Files • Plus More

(Add \$3.00 shipping.*)

List \$329



(Add \$10.00 shipping.*)

List \$329



Call


Atari & Commodore

For IBM & Apple

Reader Service No. 193



22292 N. Pepper Road Barrington, IL. 60010 We Love Our Customers

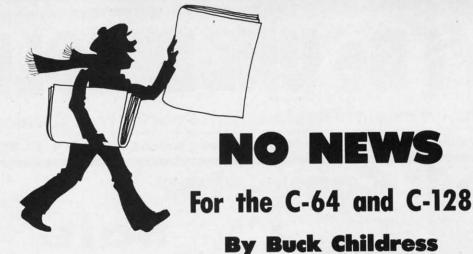



Il the king's horses and all the king's men can't put my program together again.

That little ditty kept echoing through my head as I lay in bed the other night. Earlier I had inadvertently dispatched a program to that Great Microchip in the Sky. It wasn't a large program, but it did have the answer to a problem that had been plaguing me for days. I wanted to compare my latest findings to the contents of another file I had saved previously. Without thinking, I loaded up the other file. By the time I realized what I'd done, it was too late. My program, along with its precious

ll the king's horses and all the king's men answer, had entered the Twilight Zone. For some strange reason I just kept hearing "All the king's horses and all the king's men..."

After losing the better part of a night's sleep, I decided it was about time to protect myself from me. Out of the bad news came *No News*. *No News* prevents programs from accidentally being transported to the Great Beyond. There are versions for both the C-64 and C-128.

After you've saved a copy of *No News*, run it. The loader POKEs the machine language data into memory and checks for errors. When the data is through loading, you can activate it. For the 128 type SYS 3072 and press RETURN. For the 64 type SYS 53000 and press RETURN. You deactivate it the same way.

There are a lot of ways to snuff out a program without switching off your computer or having it lock up. You can easily squash one with an errant load. If you're loading into an area of RAM that is currently in use, such as BASIC, the program being loaded will wipe out the one in memory. Kiss it goodbye. There's no way to get it back. If this happens, your only recourse may be two aspirins and bedrest. Of course you know about NEWing a program. If you don't panic, a rescue can sometimes be performed—if you know how. Running a program can be disastrous if it executes a NEW or LOAD command while in operation. And there's always the possibility of the computer locking up.

Naturally the best way to prevent these disasters is with safety saves. But, alas, you and I are only human. Sometimes our cranial microchips take a vacation and allow the Masters of Disaster to creep in. The only way to protect ourselves at such times is with a program that compensates for our temporary jellylike state.


No News monitors your commands, even when your brain is sleeping. Whenever you enter an immediate mode command (no line number), No News checks to see if you've entered NEW, RUN, or LOAD. If you're using a 128 in 128 mode, it also checks for BLOAD, DLOAD, and BOOT. If any of these commands are encountered, No News gives you a chance to recant before the questionable deed is done.

Just think, no more anxiety attacks because you've launched hours of work into oblivion. No more Russian Roulette with all six chambers full. You've got it made.

Don't suffer the bad news of a lost program. No News is good news! □SEE PROGRAM LISTING ON PAGE 88

NEW!

COMMODORE COMPATIBLE! EXCEL-71 Disk Drive



Completely compatible with the C128. AND compatible with the 1571! Yet smaller and more reliable.

List Price: \$349

NOW ONLY

FULL ONE-YEAR WARRANTY SATISFACTION GUARANTEED FAST DELIVERY!

ALL Major Credit Cards Accepted 6 am to 6 pm 6 days a week

ORDER NOW TOLL-FREE 1-800-356-5178




Emerald Components International Dept. A, P.O. Box 1441, Eugene, OR 97440 In Oregon, for orders and customer service: 503/683-1154

Reader Service No. 183

Har adpending

SELECTION OF THE PARTY OF THE P



Design pictures and graphics quickly and precisely. Unlike other drawing programs, you can produce exact scaled output on your printer. Design in the units of your drawing problem (feet, miles, meters, etc.) and send hardcopy to most printers. Uses either the keyboard, lightpen or 1351 mouse. Two separate work screens-transfer artwork from one screen to the other. Place text in four sizes anywhere in the picture—three extra fonts included: Old English, 3-D and Tech. "Try Again" allows you to undo mistakes. Draw solid or dashed lines, circles, ellipses at any angle, rays and boxes. Design fill patterns, fonts and objects. Cadpak is the full-featured design and graphics package for your computer. for C-64 \$39.95 for C-128 \$59.95

PPM

Personal Portfolio Manager is the most comprehensive stock market portfolio management system available for the 64 or 128—For investors who need to manage stock portfolios, obtain up-to-the-minute quotes and news, and perform selected analysis. Allows multiple portfolios for special



Personal Portfolio Manager

- "...Personal Portfolio Manager will help you make the most of your money." Jim Grubbs, RUN Magazine
- "...a customized data base with advanced telecommunication features...sophisticated report generator...hard to beat..." Ted Salamone, Commodore Magazine

interests (high tech, low risk, income, etc.) and monitored individually. And the versatile report generator lets you produce any kind of report to analyze a portfolio or stock. You can even update your portfolio automatically using Dow Jones or Warner Computer Systems and your modem.

for C-64 \$39.95

for C-128 \$59.95


Super Pascal

Your complete system for developing applications in Pascal. A complete implementation of standard Pascal (Jensen and Wirth). C-64 version has a high-speed DOS (3X) for quick and efficient use. The extensive editor (source included) contains added features: append, search and replace. Includes assembler for any of your machine code requirements. Used in hundreds of schools to teach programming and also used for serious development projects. But it can be used for more than just learning Pascal, use it for serious programming. With complete graphic library (source included) in machine language for super-fast execution. Want to learn Pascal or develop software using the best tool? Super Pascal is your first choice.

for C-64 \$59.95 for C-128 \$59.95




. and SUPER BOOKS!




Anatomy of the C-64
Insider's guide to '64 internals.
Graphics, sound, I/O, kernal,
memory maps, and much
more. Complete commented
ROM listings. 300pp \$19.95



Analomy of the 1541 Drive
Best handbook on this drive,
explains all. Filled with many
examples programs, utilities.
Fully commented 1541 ROM
listings. 500pp \$19.95



Tricks & Tips for the C-64
Collection of easy-to-use techniques: advanced graphics, improved data input, CP/M, enhanced BASIC, data handling and more. 275pp \$19.95



GEOS Inside and Out
Detailed into on GEOS. Add
your own applications to
GEOS. Edit icons. Constant
display clock. Single-step
through memory. \$19.95



GEOS Tricks and Tips
Collection of helpful techniques for all GEOS users.
Includes font editor, machine
language monitor, quick
backup, more. \$19.95



C-128 BASIC 7.0 Internals
Get all the inside info on
BASIC 7.0. This exhaustive
handbook is complete with
fully commented BASIC 7.0
ROM listings. \$24,95



C-128 INTERNALS
Important C-128 information.
Covers graphic chips, MMU, I/O, 80 column graphics and fully commented ROM listings, more. 500pp \$19.95



1571 INTERNALS
Essential reference. Internal
drive functions. Explains
various disk and file formats.
Fully-commented ROM
listings. 450pp \$19.95



C-128 TRICKS & TIPS
Fascinating and practical info
on the C-128. 80-col hires
graphics, bank switching,
300 pages of useful information for everyone. \$19.95



C-128 PEEKS & POKES
Dozens of programming
quick-hitters, techniques on
the operating system, stacks,
zero page, pointers, and
BASIC. 240pp \$16.95

Call now for the name of your nearest dealer. Or order direct with your credit card by calling 616/241-5510. Add \$4.00 per order for S&H. Foreign add \$12.00 per item.

Abacus

P.O. Box 7219 Dept. H9 Grand Rapids, MI 49510 Telex 709-101 • Fax 616/241-5021 Phone 616/241-5510

Other books and software also available. Call or write for your free catalog. Dealers inquires welcome—2000 nationwide.

SIOCERI EXERNIZE

The 128

How Does the Commodore 128 Stand Up Against the PC Compatibles?

ommodore has recently introduced its own versions of IBM PC-compatible computers, which it is billing as "the Clone Killers." This is a good time to compare Commodore's more-familiar computers, the C-64 and the C-128, with this other breed of computers, the PCs and PC-compatibles.

There is a conglomeration of computers from numerous manufacturers whose main intent is to duplicate the functions of the IBM PC and to run all the software written for it. They sell at prices lower than the IBM version. These machines typically offer no innovations or enhancements over the original machine, and they are generally referred to as "clones."

Before the new line of IBM computers, the Personal System 2, was introduced in April, there were many rumors that IBM was out to "do in" the clone manufacturers. It was thought IBM would provide a computer with such sophisticated features and a low enough price that clone manufacturers could not compete.

It turned out that the bottom of the line of new IBM computers, the Model 30, is priced above the typical clones. It has some advanced features and it surpasses the original PC in many respects, but it is not the "below \$1000, must-have computer" which some prognosticators foresaw (or hoped for).

Hence the Commodore PC10 is out to take on the task of "clone killer." With its \$999 price tag and a nice combination of features, it may be competitive in the clone wars. Price is the main consideration among clone buyers, although reliability, product support, and brand name are also important to various degrees. How the PC10 will fare remains to be seen.


In the meantime, if you are wondering whether it is worthwhile to move onward from your C-64 or C-128, keep reading. We will compare functions, features, operating environment, and performance of the C-128 with the basic IBM Personal Computer, better known as the IBM PC. In the end, you may realize that your Commodore was, and still is, the best machine for your needs and budget. On the other



hand, you may conclude that a PC-compatible clone is definitely your next machine.

PHYSICALLY SPEAKING

Physically the C-128 and the PC are quite different. (Discussions mentioning "PC" pertain to the IBM PC, the IBM XT, and PC-compatibles such as the Commodore PC10-1

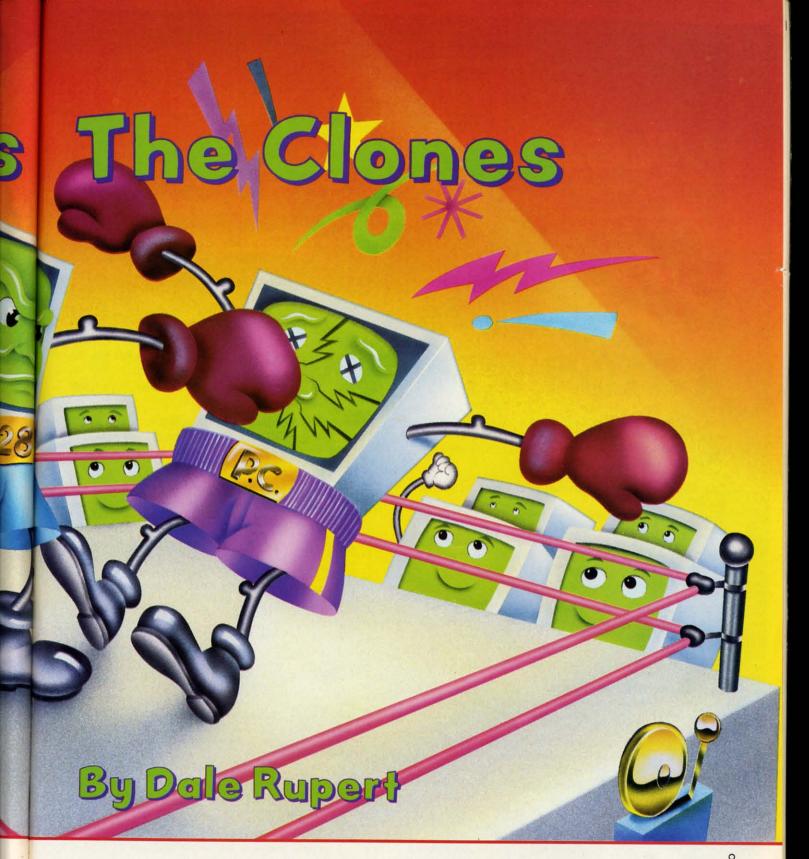

and PC10-2, unless otherwise noted.) I will assume you are familiar with the basic components of the C-128 (or the C-64). The PC has a keyboard attached to the system unit by a coiled cord. The system unit is a box which contains the circuitry, the power supply, disk drives, and optional expansion boards. A video monitor and a printer complete the basic system.

The expansion boards provide functions not built into the motherboard. Depending upon the model of PC, these may include serial and parallel ports for printers, modems, and sion. The add-on boards stand vertically within the system unit, mounted into connectors on the motherboard, with



A SPECIAL OFFER TO AHOY! READERS

With your FREE QuantumLink Starter Kit you can connect to a useful and fun online network at a very affordable price. QuantumLink will help you get the most out of your Commodore 64® or 128™. Here's how.

The ONLY official Commodore supported online service.

You'll have access to Commodore services including a hotline for getting fast answers to your questions from experts, online information, user group support, and "live" conferences and forums with Commodore engineers and experts. Because QuantumLink is specially designed for Commodore users, all the services are carefully selected to be of interest to you.

Hundreds of exciting services.

Get over 4,000 Commodore software programs. Play games with people from all over the country, including soon-to-be-released Lucasfilm's Habitat™. Preview "hit" software before you but it. Book travel reservations, and much, much more!

Easy to use AND affordable.

With QuantumLink, you don't have to memorize any complicated commands. Colorful menus and help screens make it very easy to connect to and use QuantumLink.

And QuantumLink is the lowest priced full-service network. For only \$9.95 a month you can access a wide range of services including up-to-the-minute news, the Grolier's Academic American Encyclopedia™, entertainment news and features as often as you like



— for no extra charge! Special "Plus" services cost only 6 cents per minute. But your first hour of "Plus" time every month is FREE. No surcharges for communications or 1200 baud access either!

Habitat: ™ and ¢ 1986 Lucasfilm Ltd. All Rights Reserved. Used Under Authorization

Get a 300 baud auto-dial modem for only \$24.95!

To use QuantumLink you'll need a modem. You can now get a 300 baud auto-dial modem from QuantumLink at a special low price of \$24.95! Just use the order form below.

Order your AHOY! subscrip	tion
today and get your FREE	
QuantumLink Starter Kit!	

☐ YES!

Sign me up for a subscription to AHOY! Plus send me my FREE QuantumLink Starter Kit.

Choose one:

- 12 issues of AHOY! for \$23.00 (\$30.00 in
- 24 issues of AHOY! for \$44.00 (\$55.00 in Canada)

☐ YES!

I also need a modem. Send me a 300 baud auto-dial modem for \$24.95. (Please allow 4-6 weeks for delivery.)

Name ______Address ______City, State, Zip ______Phone _____

Check or money order enclosed for \$ _____

(Make payable to Ion International Inc.)

Mail this coupon to:

AHOY!/Q-Link Subscription Offer c/o Ion International Inc. 45 W. 34th St.—Suite 500 New York, NY 10001



This offer is valid through 12/31/87.

other jacks and connectors coming out the back of the system unit. The system unit case must be opened for access to the motherboard and for changing the expansion boards.

COMPARING BRAINS

The PC uses a "16-bit" microprocessor, the 8088, running at 4.77 Megahertz (MHz). Let's compare the 8088 with the 8502 in the C-128. The 8502 (and its nearly identical twin 6510 in the C-64) are "8-bit" microprocessors running at 1 MHz. In C-128 FAST mode, the 8502 runs at 2 MHz.

The "8-bit" versus "16-bit" terminology can be clarified. This refers to the width (in binary bits) of the internal circuitry in each processor. Within 8-bit and 16-bit processors, data is transported among registers and processed within the "arithmetic logic unit" in 8 and 16 bit wide chunks, respectively.

The 8088 is an unusual 16-bit processor since it has an external data bus which is only 8 bits wide. This means that it usually fetches at least two 8-bit bytes from ROM for each instruction. A "true" 16-bit processor fetches 16 bits at a time on a 16 bit wide data bus. The external 8 bit data bus of the 8088 saves money and allows a more compact design at the expense of processing speed.

The 4.77 MHz and 2.0 MHz operational speeds also need explanation. Operations within a microprocessor are synchronized with an external system clock. The speed of operation depends not only on the clock speed but also on the number of clock cycles needed per instruction. In general, the PC is not 2.385 times as fast as the C-128, as the basic clock speeds might imply (4.77/2 = 2.385).

For example, the NOP (no operation) instruction on the PC requires 3 clock cycles, whereas the NOP on the C-128 takes only 2 clock cycles. One clock cycle on the PC is 1/4.77E6 seconds or 210 nanoseconds (ns). One clock cycle on the C-128 is 1/2.0E6 seconds or 500 ns. Therefore 3 cycles at 4.77 MHz is roughly 630 ns, and 2 cycles at 2.0 MHz is 1000 ns, so the PC is only about 1.6 times as fast at doing nothing as the C-128 is.

Consider one other assembly language instruction, "load accumulator from memory." On the PC this instruction takes a minimum of 10 clock cycles (2100 ns), whereas it takes as few as 2 clock cycles on the C-128 (1000 ns). Based on these numbers, the C-128 will be over twice as fast as the PC for some operations. We'll run some benchmarks later.

On the PC, the disk drives are accessed over a special parallel bus by means of a disk controller. As announced, the Commodore PCI0-1 has one 5¼" floppy disk drive, and the PCI0-2 has two. The controller circuitry is on the motherboard. The IBM PC requires a separate expansion board for the controller.

The standard floppy disk for the PC is double-sided, double-density, and it stores a nominal 360K bytes. The format of the PC disks is quite different from the C-128 disks. Double-sided diskettes on the 1571 store a nominal 339K bytes.

Actually the format of data on PC disks depends upon the version of the Disk Operating System (DOS, rhymes with "floss"). Unlike DOS in ROMs of the C-128's disk drives, DOS used on the PC is software based. The PC10 comes packaged with version 3.2 of MS-DOS. MS-DOS stands for Microsoft DOS. DOS sold by IBM is called PC-DOS, but it is essentially the same software. We will say more about the operating systems later.

The 8088 family in the PC includes a numeric co-processor called the 8087. This is an optional chip which provides significant speed improvement in mathematical processing for certain software. There is an empty socket on the PC motherboard for this chip. Numeric processing on the C-128 must be performed in software and is much slower.

Random Access Memory (RAM) on the C-128 is expandable up to 640K bytes, although only 64K is accessible at one time. This is because of the 8502's 16-bit address bus

Table 1
Benchmark Times (in seconds)

Test #	Description	PC	C-128 FAST	C-128 SLOW
1	FOR/NEXT	13.0	11.5	24.3
la	(optimized)	4.9	7.9	16.9
2	Math Op's.	7.8	10.9	23.1
3	String Op's.	7.2	8.3	17.5
4	Disk Write	16.9	31.1*	42.6*
5	Disk Read	10.1	16.9*	23.1*
6	Vert. Print	49.7	50.7	86.4
7	Horiz. Print	18.7	9.6	19.0
8	Random Numbers	6.6	9.0	18.9
9	Random Points	7.7	8.9	18.7
10	Random Lines	3.7	4.2	8.6
11	Random Circles	4.3	26.5	56.2

*used manual stopwatch for these times

(2 ↑ 16 = 64K). The Memory Management Unit in the C-128 can shuffle 64K chunks of memory so that some software can use the full complement of memory.

The 8088 processor on the PC has a 20-bit address bus. This provides an address space of 1 Megabyte, of which a maximum of 640K bytes in standard configurations is RAM. There are various software controlled bank-switching techniques to allow more than 640K of RAM. Some expansion boards allow 2 Megabytes or more of RAM to be used on a PC.

The significantly larger address space as well as the 16-bit data bus give the PC the power to handle much larger and more complicated software than the C-128 can.


Another important distinction between the two classes of computers is that the PC uses RAM with parity checking. Each byte of RAM on the PC requires nine bits, eight data bits and one parity bit. The parity bit is an error checking mechanism. It is set to zero or one so that the sum of all nine bits in the byte is odd (for odd parity).

Circuitry checks the parity of each data byte read. If the sum of the nine bits is even, hardware flags the error and software identifies the problem. This guarantees that bits of data cannot be changed by gamma rays or faulty circuitry, for example, and go undetected.

In a game of *Asteroids*, an improperly written or read data byte is usually inconsequential. On the other hand, when the computer is calculating your company's payroll,

it is probably not worth the gamble that there are no gamma rays heading your direction. Parity checking is reason enough to use a PC in business environments.

"320 by 200 with 16 colors" on the C-128 is misleading since there are not 16 independent colors for any two adjacent pixels. There are no such restrictions on the PC.

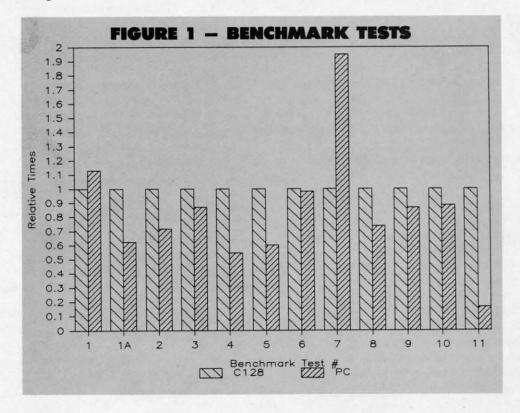

GRAPHICS GALORE

Among the most confusing aspects of the PCs is their wealth of video standards. The video driver circuitry is provided on an add-on board for the IBM PC and for the PCl0. The video adapter board in the PCl0 is very versatile, enabling that machine to run essentially any software on any video monitor.

The video adapter in the PC10 duplicates the functions and modes of the IBM Monochrome Display Adapter, the IBM Color/Graphics Adapter (CGA), the Hercules Graphics Adapter, and the Plantronics Color Board. CGA is the most common color/graphics standard, providing 320 by 200 resolution with four colors or 640 by 200 resolution in monochrome. The Hercules and Plantronics standards are supported by some software packages. The Hercules standard provides higher resolution graphics on the IBM Monochrome Display, and the Plantronics standard gives higher resolution and more colors on a color display.

Two newer graphics modes using the Enhanced Graphics Adapter (EGA) and Video Graphics Array (VGA) could be added to the PC10 by replacing its video board with either an EGA or VGA board. These two modes provide even higher resolution and many more colors, but they each require different video monitors as well. As an example, EGA provides up to 640 by 350 pixels with 16 out of 64 colors. VGA goes on up to 640 by 480 pixels with 16 colors or 320 by 200 with 256 colors out of a total of 262,144 colors.

Unlike the C-128 where all pixels within an 8 by 8 block must be one of two colors (foreground or background), the color of each pixel on the PC is individually definable. The

OPERATING ENVIRONMENTS

The operating environment of the PC is quite different from that of the C-128. When you boot up the C-128, you are usually in BASIC. Disk and file commands are all given from BASIC. But a normal bootup on the PC puts you into the Disk Operating System (DOS) environment.

From DOS on the PC, you may format disks, copy files and disks, display directories, and perform other disk-related activities. You may also execute machine language programs such as spreadsheets, word processors, games, utilities, or programming languages by entering the name of the program. You do not do any normal programming in

DOS. You generally go from DOS into an editor or into a programming language to write programs. MS-DOS on the PC is very similar to the CP/M environment on the Commodore 128.

To program in BASIC, you execute the command BASICA (or GWBASIC) from DOS. This command loads and runs a machine language program named BASICA.COM (or GWBASIC.COM). Now you are in a BASIC environment comparable to BASIC 7.0 on the C-128.

On the C-128, BASIC is entirely in ROM. You don't load it from a disk. (Other languages such as COMAL and Pascal need to be read from a disk or a ROM cartridge.) On the IBM PC, the core of BASIC (called Cassette BASIC) is in ROM, and only the advanced features of disk BASIC (called BASICA) are loaded from disk.

The PC clones generally do not contain any BASIC in ROM. Therefore the entire BASIC language must be loaded into RAM from disk. GWBASIC is a full-featured BASIC compatible with IBM BASICA which is included with the PCIO. GWBASIC is sometimes called "Gee Whiz BASIC" because it provides more "bells and whistles" than older versions of BASIC did. GWBASIC is a version of Microsoft BASIC just as BASICA, BASIC 2.0, and BASIC 7.0 are.

BASIC COMPETITION

As C-128 owners know, BASIC 7.0 is a very powerful programming language. It provides functions specifically for the C-128 such as sprite graphics and SID sound generation which are not available with PC BASIC. The PC has very elementary sound capabilities, and it does not pro-

WDISK

Why type in the listings in this month's Ahoy! when we've done it for you? All the programs in this issue are available on the current Ahoy! Disk for \$8.95. Isn't your time worth more than that?

Use the coupon at the bottom of this page to order disks for individual months,

a disk subscription, or the special anthology disks described below. (You can also subscribe to the Ahoy! Disk Magazine-

disk and magazine packaged together at a spe-

cial reduced rate. See the card bound

between pages 66 and 67.)

BEST OF '84

Address Book (3/84)

Air Assault (5/84)

Checklist (7/84) Construction Co. (12/84)

DOS (9/84)

Emerald Elephant (10/84)

I Got Biorhythm (5/84) Lawn Job (10/84)

Lunar Lander (4/84)

Math Master (5/84)

Micro Minder (8/84)

Multi Draw 64 (1/84)

Name That Star (4/84)
Post Time (6/84)

VIC 40 (10/84)

Space Lanes (4) (3/84) Space Lanes (4) (3/84) Space Lanes (64) (3/84) Space Patrol (12/84)

BEST OF '85

Ahoy! Dock (9/85) Auto Line Numbers (3/85)

File Lock (9/85) Fontasia (2/85)

Futurewar! (2/85)

Gameloader (12/85)

Home Budget (3/85)

Music Tutor (1/85)

Telelink (2/85)

Salmon Run (3/85)

Tile Time (5/85)

Screen Dump (8/85)

Jewel Quest (12/85)
Lightning Loader (1/85)
Midprint (1/85)
Midprint (1/85)

Directory Manipulator (12/85)

Alpiner (6/84)

since acent

iron-

e dif-

2-128.

e C-

y in

com-

from

oot-

into

stem

PC.

copy

irec-

ther

You

hine

n as

ces-

pro-

en-

oro-

any

in

nto

on

the

CA

ins

(or

ent

ad

as-

On

C) IC

in ed

C

er

BEST OF '86

Disk Cataloger (8/86) Dogcatcher (9/86) Fidgits' Music School (7/86) Flap! (8/86) Guardian (11/86) Guardian (1160) Head to Head (2/86) Highlight (8/86) JCALC (4/86)

Meteor Run (8/86) Mine Canyon (9/86) Mountaineer Mack (10/86) Star Strike (6/86) Step On It (8/86) Syntax Patrol (9/86)

Teleporter (11/86) Tenpins (11/86) 1541 Alignment Check (2/86)

BEST UTILITIES

Auto Append (7/85) BASIC Trace (4/85) Base Conversions (9/84) Commodore Font Editor (5/85) Booter (4/85) DOS (9/84) Fastnew (9/85) Formatter (8/85) Lucky Lottery (7/85) Maestro (10/85) Micro Minder (8/84) Screen Bit Dump (6/85) Screen Magic (6/85) Start & End File Address (9/85) Printal (7/85) Two Column Directory (5/85) 1541 Cleaning Utility (10/85) Windows (8/85)

BEST UTILITIES II

Alarm Clock (1/86) BASIC Relocator (1/86) Bigprint (5/86) Chrono-Wedge (4/86) Disk Checkup (10/86) Failsafe (5/86) Long Lines (11/86) Programmer's Aid (3/86) Quick Change (10/86) Reversed Remarks (7/86) Screen Sleuth (7/86) Screen Window (4/86) Speech64 (9/86) The Editor (12/86) Trackdown (6/86) Very-Able (3/86) 128 to 64 Autoboot (10/86)

BEST GAMES Construction Co. (12/84) Alpiner (6/84) Disintegrator (8/85)
Dragon Type (9/85)
Duck Shoot (6/85) Emerald Elephant (10/84) Gators N Snakes (8/85) Lawn Job (10/85)
Mystery at Mycroft Mews (10/85)
Name That Star (4/84) Gravinauts (10/85) Post Time (6/84) Salvage Diver (9/84) Script Analysis (7/85) Space Patrol (12/84) Tile Time (5/85)

BEST GAMES II

Actionauts (4/86) Air Rescue (4/86) Brickbusters (3/86) Crabfight (2/86) English Darts (5/86) Got a Match? (6/86) Haunted Castle (1/86) Head On (7/86) Knockout (1/86) Micro City (12/86) Minotaur Maze (12/86) Penguins (10/86) Ski Folly (5/86) Star Search (5/86) Swoop (4/86) The Last Ninja (9/86)

BEST C-128

Ahoy!Term (3/86 Dark Fortress (1/87) Extended Background Mode (4/87) Dual Dump (9/86) Infoflow (4/87) List Formatter (4/87) More BASIC 128 (2/87) Nebergall Run (7/86) Queen's and Bishop's Tours (6/86)
Rescue 128 (3/87)
The Adia (4/2)(8/1) Planet Duel (4/87) The Artist (12/86) Variable Manager (9/86) Wordcount (7/86) 128 to 64 Autoboot (10/86)

Wizard of Im (7/85) We've collected Ahoy! 's best programs onto the Anthology Disks described here.

Please note that many of these programs will be unusable without the documentation printed

in the issues of Ahoy! listed in parentheses. SINGLE ISSUE AND SUBSCRIPTION PRICES BACK ISSUES \$8.95 (Postage and Handling Included) U.S.A. CANADA **ELSEWHERE** In Canada add \$2.00 per issue; outside US and Canada add \$4.00 per issue. ■ September '87 Ahoy! Disk 8.95 \$ 12.95 \$ 13.95 \$8.95 \$8.95 ☐ 12-Month Disk Subscription \$ 79.95 \$ 99.95 \$124.95 \$8.95 \$8.95 \$8.95 24-Month Disk Subscription \$149.95 \$179.95 \$8.95 \$8.95 ANTHOLOGY DISKS \$10.95 EACH ☐ Best Utilities☐ Best Utilities II ☐ Best of '84 Send coupon or facsimile to: Ahoy! Program Disk Best of '85 Ion International Inc. ☐ Best Games ☐ Best of '86 45 West 34th Street, Suite 500 ☐ Best Games II ■ Best of C-128 New York, NY 10001 NAME **ADDRESS** epted CITY STATE ZIP Make check or money order payable to Double L Software. N.Y. State Residents must add 81/4 % sales tax.

#2 — FEB. '84 Illustrated tour of the 1541! Artificial intelligence! Synapse's Ihor Wolosenko interviewed! String functions! And ready to enter: Music Maker Part II! Screen Manipulation! Night Attack! Relative Files!	#3 — MAR. '84 Anatomy of the 64! Printer interfacing for VIC & 64! Educational software series begins! VIC game buyer's guide! And ready to enter: Address Book! Space Lanes! Random Files on the 64! Dynamic Power!	#5 — MAY '84 Future of Commodore! Inside BASIC storage! Memory management on the VIC & 64! Guide to spreadsheets! Hurray for arrays! And ready to enter: Math Master! Air Assault! Biorhythms! VIC Calculator!	#6 – JUNE '84 Game programming col- umn begins! Code generating programs! Ru- pert on inputting! Memory management con- tinues! And ready to enter: Post Time for the 64 & VIC! Alpiner! Sound Concept!
#7—JULY '84 MSD dual disk drive! Data- base buyer's guide! Training your cursor! Screen displays! File Sleuth! Users Groups! And ready to enter: Renumbering! Checklist! Math Defender! Brisk! What's My Job?	#8—AUG. '84 Choosing a word processor! Computational wizardry! Creating your own word games! Sound on the 64! And ready to enter: Micro-Minder! Directory Assistance! The Terrible Twins! Words Worth!	#9 — SEPT. '84 Program your own text adventure! Build a C-64 cassette interface! Video RAM! Word processors, part II! And ready to enter: Salvage Diver! DOS! Sound Explorer! The Castle of Darkness! Base Conversions!	#10 — OCT. '84 C-64 graphics programs! Bit-mapped graphics! Joystick programming! Graphics processing! And ready to enter: VIC 40 Column Operating System! BAM Read & Print! Emerald Elephant! Lawn Job!
#11—NOV. '84 Music programs & key- boards for the 64! Graphics feature contin- ues! 2-D arrays! And ready to enter: PTE word processor! Block Editor! Alternate Character Set for the 64! Tunnel of Tomachon!	#12 — DEC. '84 Buyer's guide to printers! 1525 printer tutorial! Fast graphics with custom characters! User Guide to KMMM Pascal! Diving into BASIC! And ready to enter: Construction Co.! Space Patrol! Cross Ref!	#13 — JAN. '85 VIC and 64 OS exposed! Sprites! Insert a 1541 device # disconnect switch! Ghostbusters! And ready to enter: Ul- tra Mail! Music Tutor! Alice in Adventureland! Midprint! To the Top! Tape/Disk Transfer!	#14 — FEB. '85 Printer interfacing! Multi- color sprites! Modems! Bulletin Boards! The- ory of game design! Buying a modem! And ready to enter: Futurewar! Fontasia! VIC Era- ser! Insurance Agent! Flankspeed! Telelink 64!
#15 — MAR. '85 Creating multiscreen gameboards! Inside the Plus/4! Commodore DOS! And ready to enter: Old Routine! Programmable Functions! Automatic Line Nos.! Home Budget! Salmon Run! Numerology!	#16 — APR. '85 Assembly language col- umn begins! Programming the joystick! 1541 disk drive alternatives! The Kernall And ready to enter: Hop Around! Faster 64! Booter! Ele- check! BASIC Trace! Space Hunt!	#17—MAY '85 Disk drive enhancements! Install a reset switch! Assembler escapades! And ready to enter: Super Duper! Two-Col- umn Directory! DSKDU! Raid! DOS Plus! Font Editor! Tile Time! Interrupt Wedge!	#18 – JUNE '85 Music & graphics entry system! How modems work! Inside the 6510! And ready to enter: Quad-Print! Mapping 4.4! Towers of Hanoi! Speedy! Duck Shoot! Bit Dumping! Screen Magic! 6510 Simulator!
#19 – JULY '85 PROM Programming! 3-part harmonies on VIC/64! Speeding pixels! And ready to enter: Auto-Append! Script Analysis! Wizard of Im! Lucky Lottery! Brainframe! Etch! Printat! Autos: Leasing v. Buying!	#20 — AUG. '85 Inside the 128! Real-world simulations! Sound effects! Moderns! And ready to enter: Windows! Formatter! Sound-a-Rama! Screen Dump! Selectachrome! Disintegrator! Fidgits! Gators N Snakes!	#21 — SEP. '85 Inside the 1571 drive and 128 keyboard! Sprite programming! And ready to enter: Fastnew! Go-lister! File Lock! Dragon Type! Superhero! Auto-Gen! Moxey's Porch! Fish Math! Ahoy!Dock! Invective!	#22 – OCT. '85 Create cartoon characters! Infinitesimal intrigue! Secrets of copy protection! And ready to enter: Shotgun! Maestro! Solitaire! Mystery at Mycroft Mews! Gravinauts! 1541 Cleaning Utility! Shadey Dump!
#23 — NOV. '85 Guide to adventure gam- ing! ML sprite manipulation! BASIC for begin- ners! And ready to enter: Lightning Loader! Knight's Tour! Chopper Flight! Rhythmic Bits! Instant Bug Repellent! File Scout! Slither!	#24 — DEC. '85 Speech synthesizer! The IBM Connection! The year's 25 best entertainments! And ready to enter: Gypsy Starship! Directory Manipulator! Cloak! Gameloader! Jewel Quest! Lineout! Santa's Busy Day!	#25—JAN. '86 Build a speech synthesizer! Survey of sports games! And ready to enter: Martian Monsters! Streamer Font! Microsim! Haunted Castle! Knockout! Infraraid! Alarm Clock! Memory Check! Scratch Pad!	#26 – FEB. '86 Windows! Build an auto- exec cartridge! Align your 1541! Survey of flight simulators! Structured programming! And ready to enter: Arena! Head to Head! Crabfight! Treasure Wheel! Character Dump!
#27—MAR. '86 Programming education- al games! Memory dumpers! Choosing a copy program! Custom characters! And ready to enter: Ahoy!Term 128! Trivia Game Maker! Brickbusters! Easy Lister! Programmer's Aid!	#28 — APR. '86 Comet catching! Survey of action and strategy games! Screen dumping! And ready to enter: Chrono-Wedge! Mr. Mysto! Air Rescue! Notemaker! Screen Window! JCALC! Hidden Cavern! Swoop!	#29 — MAY '86 128 graphic bit map! Epyx strategy guide! 128 commands! ML music programming! And ready to enter: Bigprint! Star Search! Failsafe! English Darts! Ski Folly! Free RAM Check! Alchemist's Apprentice!	#30 — JUNE '86 Debugging dilemmas! Public domain software! Winning at Ultima! Computer Aided Design! And ready to enter: LazyBASIC! Got A Match? Star Strike! Queen's and Bishop's Tours! Shaker! Trackdown!
#31 — JULY '86 Inside the Amiga! Conditional branching! Chess programs! 128 and 64 DOS! And ready to enter: Screen Sleuth! Skull Castle! Head-on! Nebergall Run! Wordcount! Crazy Joe! Fidgits' Music School!	#32 — AUG. '86 Inside the Amiga, part II! Approaching infinity! C-64 war simulations! Pascal for beginners! ML graphics! And ready to enter: Reversi! Highlight! Disk Cataloger! Meteor Run! Trim! Step On It! Flap!	#33 — SEPT. '86 Windows and viewports! Sound & music on the 64! COMAL! And ready to enter: The Last Ninja! Speech64! Multi RAM! Dogcatcher! Trapped! Matchblocks! Variable Manager! Dual Dump! Mine Canyon!	#34 — OCT. '86 Build a digital oscilloscope! ML speed techniques! And ready to enter: Vault of Terror! Quick Change! Penguins! Attack Force! Disk Checkup! Dvorak Keyboard! Mountaineer Mack! 128 to 64 Autoboot!
#35 — NOV. '86 C-128 shadow registers! Data file handling! PROMAL! Habitat! And ready to enter: Teleporter! 128 RAM Check! Discs of Daedalus! Guardian! Tenpins! Syntax Patrol! Deluxe List! Long Lines! Detonation!	#36 — DEC. '86 File manipulation! C-128 shadow registers! Football games! And ready to enter: The Artist! Minotaur Maze! Mouse in the House! Lazy Source Code! Rebels and Lords! Speedway! The Editor! Micro City!	#37—JAN. '87 Pointers and the monitor! Best games of '86! DOS for beginners! And ready to enter: Vortex! Hanger 14! BASIC Ahoy! Catacombs! Lixter! Dark Fortress! Per- maLine! Starfighter! Bugout! Screens!	#38 – FEB '87 Hacking into machine lan- guage utilities! Amiga RAM expanders! And ready to enter: Window Magic! Crunchman! User Conventions! The Adventurer! More BASIC 128! Jailbreak! Turtle Rescue! 640!
#39 — MAR. '87 Basic esthetics! Survey of video digitizers! Multiplayer games! And ready to enter: C-64 Compressor! Wizard Tag! Turbopoke! Rescue 128! Lights Out! Pinball Arcade! Stow Away! Caverns of Geehonk!	#40 — APR. '87 Inside the Amiga 2000! Fractals! Baseball games! COMAL, turtle graphics, and Logo! And ready to enter: Info-flow! Laps! Pieman! List Formatter! Scrambler! Extended Background Mode! Planet Due!!	#41 — MAY '87 Kernal power! 64 and Amiga graphics! Microworlds in COMAL! Brain games! Dark Fortress master maps! And ready to enter: Moondog! Startup! Illusion Master! Wall Crawler! Scavenger Hunt!	#42 — JUNE '87 Megaflops and microseconds! Sci-fi braingames! C-64 to Amiga file transfer! And ready to enter: D-Snap! Wraiths! Galactic Cab Co.! Cave of the Ice Ape! ALT-Key 128! Power Squares! 128 Multi RAM!
#43 — JULY '87 Real world interfacing! Bit map graphics tutorial! C-64 graphic conversion! Martial arts software! And ready to enter: Wizard Tag II! Data Creator! Plink & Plonk! Univaders! Data Express! 128 Scroller!	BACK ISSUES	s of Ahoy!	#44 — AUG. '87 Electronic screen swap- ping on the C-128! Science fiction action games! The death of GOTO! Amiga reviews! And ready to enter: Archer! Banner Print! Route 64! Steeplechase! Batter Up! Scanner!
and fill up those boris	ng Ahoy! only once a r ng in-between weeks v ne coupon below to ord	with all the programs, der your issues while l	articles, and reviews limited supplies last.
	l conjec of jeeue #	copies of issue #	ALL ISSUES \$4.00
se coupon of facsimile. If or-	copies of issue #	earles of leave #	EVERDT #2 #2 0 #21 (610
ering more than four issues,	copies of issue #		
ering more than four issues, st choices on a separate sheet.	Enclosed please find my che	ck or money order for \$ (o	utside the USA add \$1.00 per co
ering more than four issues, at choices on a separate sheet. You have a modem and want	Enclosed please find my che	ck or money order for \$ (o	utside the USA add \$1.00 per co
ering more than four issues,	Enclosed please find my che NAME ADDRESS	ck or money order for \$ (o	utside the USA add \$1.00 per co

ograms! Ruement con-Time for the

gramming! enter: VIC AM Read &

cing! Multioards! Theodem! And al VIC Era-Telelink 64!

e the 6510! apping 4.4! Shoot! Bit imulator!

characters! py protec-! Maestro! ws! Gravidey Dump! d an auto-Survey of

ramming! to Head! ter Dump! filemmas! at Ultima! to enter: e! Queen's

down! illoscope! to enter: uins! At-(eyboard! oboot!

hine laners! And nchman! er! More e! 640! nicrosec-

miga file Wraiths! pe! ALT-RAM! n swapn action

er Print!

Scanner!

IST.

510.00

er copy

Y 1000

vide hardware supported graphics objects such as sprites.

PC BASIC does include two fairly sophisticated "sublanguages," one for sound and another for graphics. The PLAY command is similar to PLAY in BASIC 7.0. Strings of characters may be combined to produce musical output. The DRAW command in PC BASIC is more powerful than DRAW in BASIC 7.0, which is primarily a line drawing command.

DRAW in PC BASIC uses strings to define sequences of cursor movements and graphics commands. This gives capabilities comparable to "turtle graphics" in LOGO and other languages.

It is interesting that some commands with identical names behave identically in the two breeds of BASIC while others are quite different. Be careful if you are translating between PC BASIC and C-128 BASIC. For example, LOCATE, GET, PUT, SWAP, WIDTH, and WINDOW are used in both languages but for very different purposes. Other similarly named commands may be subtly different. And sometimes, completely different names, such as CLS and SCNCLR or VARPTR and POINTER, are used for identical purposes. Let's hear it for standardization!

PC BASIC requires that spaces or separators be used between keywords and variables. An advantage of this is that variable names may contain keywords. In PC BASIC for example, GOAL, FONT, and VALUE are valid variable names. Use those in your C-128 programs and you will end up with syntax errors. Another advantage of spaces is that programs written for the PC are inherently more readable. On the C-128,

FORN=QTOM: J=TAN(N): PRINTJ: NEXTN

is confusing but allowed. It must be written with at least this many spaces on the PC:

FOR N=Q TO M:J=TAN(N):PRINT J:NEXT N

PC BASIC allows variable names of any length. Also, PC BASIC allows groups of variable names to be of a specific type, such as integer, single precision, string, or double precision. DEFINT A-J defines all variables beginning with letters from A through J to be integers.

PC BASIC allows programs to be merged or chained at run time, and it allows variables to be passed between programs. This is not explicitly supported in BASIC 7.0, but it can be done to a limited extent. PC BASIC also allows programs to be saved in tokenized form or in ASCII (text) form. Either form of the program can be loaded and executed. This process is more cumbersome on the C-128.

The file handling and communications commands are much more complete in PC BASIC than in BASIC 7.0. Also, PC BASIC provides numerous "interrupt-driven" commands for event trapping. In BASIC 7.0, the TRAP command provides run-time error-detection capabilities. Normal operation of the program can be interrupted and rerouted when. an error occurs.

PC BASIC allows event trapping for errors as well as for keystroke, joystick and light pen, serial communications, and timer inputs which may be asynchronous to the normal program flow. A program need not continuously read the keyboard to know when a certain key is pressed, for example. The specified keystroke will make the program stop what it's doing and branch to the interrupt routine.

All in all, PC BASIC (BASICA and GWBASIC) is quite similar to C-128 BASIC (BASIC 7.0). They both allow the programmer to take full advantage of the respective computers without requiring the endless PEEKs, POKEs, and contortions of the less powerful versions of BASIC.

HEAD TO HEAD

How do the C-128 and the PC compare when running identical BASIC programs? That is the idea of benchmark testing. Benchmarks are programs which test various aspects of performance. The choice of definitive benchmark programs can be quite complicated. We don't need much sophistication to get a "ballpark" estimate of relative performance. Benchmarks Galore (see page 81) shows the tests run on the C-128.

For a start, Benchmark #1 is this simple FOR-NEXT loop:

100 FOR N=1 TO 10000 : NEXT N

On the C-128, we use these lines to measure the time in seconds:

20 TO = TI50 PRINT (TI-TO)/60

Commodore

Saturday & Sunday October 3 & 4, 1987 10 a.m.-6 p.m.

THE DISNEYLAND HOTEL ANAHEIM, CALIFORNIA

- EXHIBITS, EVENTS AND DOOR PRIZES
- NATIONALLY KNOWN COMMODORE SPEAKERS
- SHOW SPECIALS AND DISCOUNTS
- SEE THE LATEST INNOVATIONS IN HARDWARE AND SOFTWARE **TECHNOLOGY**

The Commodore Show is the only West Coast exhibition and conference focusing exclusively on the AMIGA. Commodore 128 and 64, and PC 10 marketplace. Enjoy the Magical Kingdom of Disney along with thousands of Commodore Users.

COMMODORE SHOW

ADMISSION \$10 DISCOUNT ON DISNEYLAND TICKETS AVAILABLE

For More Information or to Reserve Exhibit Space, Contact



RK PRODUCTIONS

P.O. BOX 18906, SAN JOSE, CA 95158 (408) 978-7927•800-722-7927•IN CA 800-252-7927

For the PC, the equivalent timing is performed by these lines:

20 TO=TIMER

50 PRINT TIMER-TO

There are two versions of Benchmark #1. The first is listed above. The second is optimized as much as possible for each machine. For the C-128, all spaces were removed from line 100 and the NEXT N statement was changed to NEXT. Only the spaces on either side of the colon can be removed for the PC. More significantly, N was specified to be an integer instead of a single precision variable. Line 100 for the PC becomes

100 FOR N%=1 TO 10000:NEXT

where the percent sign indicates an integer variable, just as it does on the C-128. The C-128 does not allow integers as FOR/NEXT loop variables.

From the time results in Table 1 (page 35), the C-128 in FAST mode is about 10 percent faster than the PC for the unoptimized program, but it is much slower than the PC in the optimized versions.

Figure 1 (page 36) displays the data for the PC and the C-128 in FAST mode from Table 1. The data from the table is first divided by each 128 time, so the 128 values are all normalized to one. A PC value greater than one means the PC is slower than the 128. PC values less than one correspond to tests in which the PC is faster than the 128.

Benchmark #2 performs a mix of single precision (floating point) math operations. The main program line for the two computers is the following:

220 K=K+(K-.6)*K/(K+.03)



Table 1 shows that the PC outperforms the C-128 on this somewhat limited test.

Benchmark #3 combines various string operations. The main statement is in line 320:

320 N\$=MID\$(LEFT\$(N\$+"AHOY",3),2,1)

The results in Table 1 show that the PC has a slight edge with these string manipulations.

The disk access tests used the 1571 drive on the C-128. Benchmark #4 writes 1000 numbers to the sequential file "Test," and benchmark #5 reads those 1000 numbers. The key statements in each test are lines 430 and 530:

430 PRINT#1,N 530 INPUT#1,K

The PC is nearly twice as fast as the C-128/1571 combination in both of these tests. I used a stopwatch for these tests since disk operations on the C-128 disable the jiffy clock interrupt. The times given by the program are much less than the actual times listed in Table 1.

The IBM PC is notoriously slow in certain types of screen updates. Tests #6 and #7 print 1000 numbers vertically and horizontally on the screen. The C-128 and the PC were both in 80-column mode for these tests. Test #6 is a measure of screen scrolling speed. It simply prints numbers 1 through 1000 vertically with this statement:

620 PRINT N

Test #7 measures screen writing and scrolling speed. It should be noted that the C-128 and the PC treat this statement in line 720 differently:

720 PRINT N;

The PC does not print a number at the end of a line if there is not room for the entire number. The C-128, on the other hand, fills all lines completely, breaking a number into two lines if it doesn't fit. The PC gives a better display at the expense of speed. Table 1 shows that the PC is comparable to the C-128 in scrolling speed, but the C-128 is nearly twice as fast at writing horizontally to the screen.

Benchmark #8 compares the speeds with which the two machines calculate random numbers from 0 to 320 and from 0 to 200 with this line:

820 R=RND(0)*320 : R=RND(0)*200

The PC version omits the "(0)" in both places. This could account for some of the PC's speed advantage over the C-128 in this test.

The last three benchmarks compare graphics display speed. Both computers draw in one color on a 320 by 200 resolution screen in these tests. Benchmark #9 puts points randomly on the screen. (By the way, it also shows how non-random these points really are.) The versions for the C-128 and the PC are as follows:

Continued on page 62

SOFTWARE SECTION

Featured This Month: Superstar Ice Hockey......41

Highland Games.....41

President Elect......42

SUPERSTAR ICE HOCKEY Mindscape Commodore 64/128 Disk; \$34.95

The weather outside is still delightfully warm, but here's one game which makes contemplating the oncoming winter a little less painful.

Superstar Ice Hockey is the best action-strategy sports simulation ever published. Period. It provides superb graphics and realistic play, and the opportunity to experience this blindingly fast sport as a general manager, coach, and skater.

Prior to the start of actual play, the computer must make several decisions. The user can select teams with either four or the regulation six players per side and decide whether to direct the squad from the sidelines or personally lace on the skates.

As the coach, the user can juggle lines and select offensive and defensive strategies. The team with the puck can stick to a balanced strategy, set up the center for a shot, or choose an all-out attack. The defender can forecheck, protect the goal, or use a balance attack similar to the offense option.

Every participant must shoulder the responsibilities of the general manager between games. In this role, the user can make trades, recruit (create) players, and send the team to Training Camp during the off-season to sharpen skills. At the end of each four-game season, the program assigns "trading points" to each team based on its performance. The worst team gets 1000, while the Cup winner receives a mere 50. A team expends points when trading, training, and in recruitment.

Thus franchises at the bottom of the league possess the most resources with which to improve for the following season. This diverges from the real-world situation, in which the rich frequently get richer, but it ought to keep one team from dominating play for very long.

Superstar Ice Hockey uses the standard three-quarters perspective, but keeps the boards low so they don't obscure the puck. Players skate, check, stick handle, and shoot with breathtakSuperstar Ice
Hockey uses
the standard ¾
perspective,
keeping the
boards low so
they don't obscure the puck.
The animation
incorporates
many subtle
nuances.
READER SERVICE
NUMBER 173



ing realism in response to joystick movements. Goalies drop to their knees, make stick and glove saves, and clear the puck away from the goal crease just like they do in the National Hockey League. The animation incorporates many subtle nuances, such as the way the goalie lifts his shoulder to block shots.

While playing the game as the goaltender offers an interesting change of pace, most users will prefer to skate as the center. The extensive, but straightforward, joystick control system allows the skater to shoot low on the ice, take slapshots, flip wrist shots, pass, check, and even execute fakes.

The simulation of skating is flawless. Players skate in circles to build momentum, but they lose speed due to fatigue as the game progresses.

The game includes offsides calls (the linesmen show no mercy) and penalties. As is all too common in the actual NHL, the refs are completely arbitrary and frequently one-sided. If they whistle a player off the ice once, the odds increase that they will catch him again later for some future infractions. Meanwhile, another skater may gleefully chop and slash without drawing a referee's eye.

The early work of chief engineer Ed Ringler should be well known from his stint with Gamestar. Superstar Ice Hockey demonstrates his continued development as a creator of superb actionsports simulations.

If this program has a drawback, it's that it may be too detailed. It is so realistic that it may intimidate those users not conversant with the workings of professional ice hockey. True puck partisans, however, will want to canonize Ringler. Bravo!

Mindscape, Inc., 3444 Dundee Rd., Northbrook, IL 60062 (phone: 312-480-7667). — Bill Kunkel



Highland Games: on a Scotch disk? READER SERVICE NO. 174

HIGHLAND GAMES Artworx Commodore 64/128 Disk; \$14.95

The success of Summer Games (Epyx) and its sequels (Summer Games II, Winter Games, and World Games) made sports anthology disks a popular category of computer entertainment. This collection of tartan track and field contests by Supernova is squarely in the tradition of Eypx's series.

Unfortunately, *Highland Games* has little originality in content and some definite flaws in the area of implementation. Set in the Scotch Highlands, this program simulates six events which range from the obligatory Long Jump,

SOFTWARE SECTION

Discus, and Hammer Throw to more exotic contests like the Weight Toss, Caber Toss, and Tug of War.

The Hammer Throw is the anthology's most successful game. Its clever play-mechanic conjures up a genuine feeling of weight and movement. The Long Jump and Discus offer nothing that hasn't been seen many times in similar software packages.

You'd think Caber Toss simulations would be few and far between. Surprisingly, this is the second in recent memory. World Games also included an electronic version of that competition. Neither one is likely to start a run on Cabers.

The one in *Highland Games* is a total washout. It combines an uninspiring visual with an awkward joystick-activated control scheme.

In the Weight Toss, a kilted clansman swings a weighted chain back and forth between his legs three times and then throws the thing over a horizontal bar. In a sense, it's like the high jump or pole vault in some other sports

anthologies. The computerist must set the height of the bar and work up to the day's peak toss little by little. This event, too, is sabotaged by its graphics. Clunky linework added to awkward animation provide unintentional humor on those through-the-legs warm-up swings.

The graphics in *Highland Games* fall short of player expectations for such programs. The onscreen athletes are tiny, as though the user were watching the event from a nearby hilltop. This gives the Hammer Throw a nice, openair feel. In other events, however, the miniscule animations make it difficult for the user to relate to the action occurring onscreen.

The sound track is composed primarily of bagpipe riffs. The well-executed musical phrases introduce the program and play between events.

Putting the Scotsmen through their paces boils down to a lot of joystick jiggling. Other games have employed a similar command control system, and it always guarantees a sore hand by the end of a play-session.

The Tug of War is the most unique event on *Highland Games*, but the lack of a solitaire option cuts into its appeal. Each participant controls the "anchor" of a four-man team and keeps him in synch with his mates as they struggle to drag the opposition across the midway mark. Nothing too complex about this contest, but it offers some fast head-to-head gaming fun.

Highland Games is part of the Art-

worx line of budget-priced software, so it may be unfair to expect it to equal the quality of programs which cost four times as much. On the other hand, a dull game is no bargain. *Highland Games* has at least a spark of interest for computerists who haven't gotten their fill of track and field simulations.

Artworx, 1844 Penfield Rd., Penfield, NY 14526 (phone: 716-385-6120). — *Bill Kunkel*

PRESIDENT ELECT: 1988 EDITION Strategic Simulations Commodore 64/128 Disk; \$24.95

The quadrennial campaign for the Presidency is the biggest high-stakes game in the United States. The winner assumes the most powerful position in the world's mightiest democratic republic, and the loser becomes tour guide on the oblivion express.

Strategic Simulations introduced the original *President Elect* before the 1984 election in which incumbent Ronald Reagan recorded a smashing victory over his rival, Democrat Walter Mondale. Many thought that the simulation of the race for the White House was more exciting than the actual election.

Four years is a long time in the computer software field, and the intervening years have not been totally kind to Nelson G. Hernandez, Sr.'s design. The drab sound and graphics, in particular, are substantially below today's sophisticated audiovisuals in quality.

n



Reader Service No. 211

SHIPPING AND HANDLING, ADD \$1.50 - C.O.D.'S ACCEPTED VISA AND MASTER CARD ORDERS ADD 4%


INDIANA RESIDENTS ADD 5% SALES TAX

An electoral map of the US shows which President

Elect hopefuls own which states, and which states are on the borderline. Factors like fatigue and overexposure can diminish a candidate's appeal. For a more complete list, see a certain Senator from Colorado. READER SERVICE NO. 176



INTRODUCING The Adventure-Simulation... Action, Role Play, Drama And Intrigue... MicroProse PRESENTS

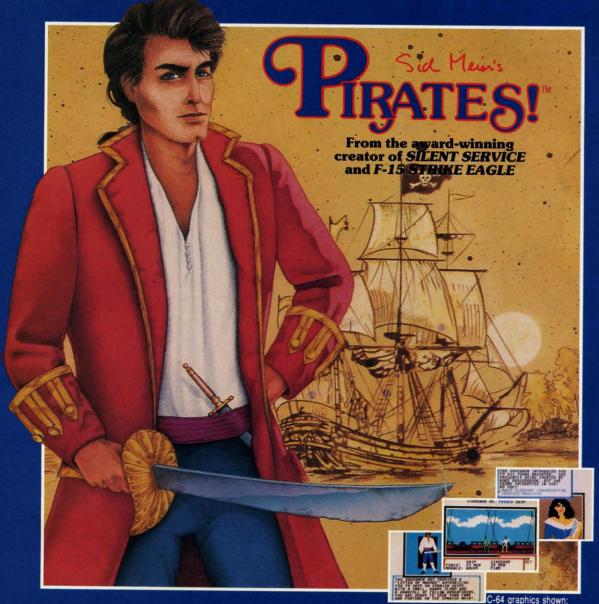

Join us, mate, for an expedition into one of the most fascinating eras of this millenium! **PIRATES!**™is an exciting new adventure-simulation that will challenge your skills while it captures your imagination!

NT

equal

four id, a land erest otten ons. Pen-385nkel

ON

the kes vinosiraour

the 84 ald ry n-

as

You are cast in the leading role as privateer captain, criss-crossing the Spanish Main, slipping into ports as needs or opportunities require but always relishing your return to the freedom of the open seas!

PIRATES!™ is a unique blend of your favorite software gaming features all in one package. It weaves together the excitement of arcade-style action, the challenge of simulation decisionmaking, and the interactive storyline of a textadventure. And, in the standard of all MicroProse software, PIRATES!™is designed to give you hundreds of hours of stimulating game play!

Pirates!™ features include:

Actual screens may vary.

- ACTION... ship battles, land conquests, fencing and sailing
- STRATEGY... plundering, trading, negotiating and forging alliances
- GOALS... treasures, romance, status, power and prestige
- NEW EXPERIENCES...explore across a map of the entire Caribbean.
- EXTENSIVE GRAPHICS... over 70 different scenes and pictures
- EXCITEMENT... triumphs and tragedies, victories and defeats

PIRATES!™ is available from your favorite "Valued MicroProse Retailer" (VMR). Call us for the VMR nearest you!



Versions planned for Commodore 64/128. IBM PC/PC Jr. and compatibles, Apple II+/c/e, and Atari XL/XE Call MicroProse for specific machine availability. Suggested retail price only \$39.95. Commodore, IBM, Apple and Atari are registered trademarks of Commodore Electronics Ltd., International Business Machines Inc., Apple Computer Inc. and Atari Inc., respectively.





Reader Service No. 190

TRY BEFORE YOU BUY:

Best selling games, utilities, educational, and classics, plus new releases!

- 100's of titles
- Low prices
- Same day shipping
- FREE brochure

YES, WE ACCEPT:









Reader Service No. 191

ENTERTAINMENT SOFTWARE SECTION

Ken Coates' Commodore 64/128 version of President Elect: 1988 Edition won't bowl over anyone with sensational programming innovations, but it overcomes its humdrum presentation with a detailed and flexible simulation of big-time politics.

One to three players can run for the Presidency under the same conditions which candidates faced in any of the elections from 1960 to 1988. Students of history and political prognosticators can even adjust the economic and political factors associated with any campaign to create an unlimited number of exciting "what if?" scenarios. The computer can guide up to three candidates if there aren't enough human participants to fill out the ballot.

Crystal-clear prompts lead computerists through the smooth routine of play as President Elect chronicles the race from Labor Day to Election Eve. The candidates must use the nine weekly turns to pile up enough support to carry the Electoral College.

Political action points are the "currency" candidates "spend" during the election. During the tussle for the top spot, candidates expend their PAP on overhead, advertising, campaign stops, and foreign travel.

Since every campaign has continuing expenses, overhead starts at a hefty 500 PAPs for a major party candidate and rises by 100 PAP per week. Weaker organizations cost a little less to maintain, and the overhead for third party nominees varies.

There are three types of campaign advertising. Each has a different purpose. A national effort sways the most voters per PAP, but this broad brush effort is not focused enough to influence particular states. Regional campaigning can inspire a meaningful voting shift, but only in one section of the country. The best way to push a large state with a close race into your column is with state-level ads, but it can be expensive.

Electronic and print advertising bring the candidates to millions of voters, but personal appearances still have the power to affect the outcome. The program assesses costs based on the number of regions and states entered and the number of individual stops.

Fatigue may hamper a candidate who undertakes a particularly strenuous whistlestop tour. Also, the law of diminishing returns quickly curbs the effectiveness of personal appearance if a politician schedules too many for the same week. A nice touch is that the effect of personal appearances is cumulative over the course of the race, so that the candidate who ventures among the voters to "press the flesh" on a regular basis gradually develops an advantage over one who lets his or her media image substitute for old-fashioned stump speaking.

Each party decides on foreign travel during the first week of the campaign. All candidates must decide where and when they will take a trip and how long they will stay. A visit to a foreign nation is a gamble that can help or hurt, depending on what happens abroad.

Any time all candidates agree on the format, a debate is held. These direct confrontations, which the program handles abstractly, can conceivably turn the course of a race and allow a dark horse nominee to come from behind.

An electoral map of the United States is the main visual. Each week, it shows the current status of every state. Color coding shows computerists at a glance which states are firmly in one candidate's camp, and which are too close to call. On election night, the map reports the state-by-state vote as it is tabulated.

It's a funny-looking map, though it gets the job done. One which depicts the United States as much less tall and skinny would be a good enhancement for the 1992 edition of President Elect.

The documentation is exemplary. The printed booklet carefully explains the overall concept and every major specific rule, and a section in the back contains helpful information about every election since 1980. Ondisk tutorials and demos buttress the printed documentation by providing specific examples of actual play.

The form could have used a little more polishing, but the content of President Elect preserves its status as a classic electronic strategy contest. President Elect is both absorbing entertainment and highly illuminating about our country's political system.

Strategic Simulations, 1046 Rengstorff Ave., Mountain View, CA 94043 (phone: 415-964-1353). -Arnie Katz

TIPS AI-ICY

Compiled by Michael R. Davila

Contributors to *Tips Ahoy!* will be handsomely compensated immediately upon acceptance. Send your best programming or hardware hints to *Tips Ahoy!*, c/o Ion International Inc., 45 West 34th Street—Suite 500, New York, NY 10001. Include a stamped and self-addressed envelope if you want your submission returned.

SCREEN STUFF

die efe if

the the

ım-

SO

ong

eg-

an-

ne-

ed

m-

de

ip

to

Printing a message onscreen is easy enough, but doing it in an out of the ordinary manner can be one of the most time-consuming tasks in programming. Here is a ready-to-use subroutine that you can put in your programs either unchanged or improved to suit you. The sprinkling of REMs stating the purpose of variables should be helpful in making modifications. The REMs can of course be omitted when typing the subroutine into your own programs.

In the listing, lines numbered below 500 are simply preparatory. The working subroutine begins at Line 500, and expects to find the message text either in string ME\$, or in consecutive elements of string array ME\$ beginning with element number one. Element number zero should not be used.

In *Drop In* each character runs across the screen and drops into its proper place to form the message that is contained in string ME\$.

Try this, or a modification of it, to add a bit of variety to the onscreen messages or menus in your own programs.

-C.C. StadlerWaynesville, NC

- ·100 INPUT"ENTER MESSAGE (40 CHAR. MAX.)"; ME\$
- •110 GOSUB 500
- •120 STOP
- ·130 :
- •500 :: REM "DROP IN" DISPLAYS STRING ME\$, FORTY CHARACTERS MAXIMUM
- •510 W1=1:REM CHAR. POS. IN TEXT STRING
- •520 PRINT"[DOWN][DOWN]"
- •530 FOR N=1 TO W1:CH\$=MID\$(ME\$,W1,1):PRI NT"[LEFT] "CH\$;:GOSUB570:NEXT
- •540 GOSUB570:PRINT "[LEFT] [DOWN][LEFT]" ;:GOSUB570:PRINT CH\$;
- •550 IF W1<LEN(ME\$)THEN W1=W1+1:PRINT:PRI NT"[UP][UP]";:GOTO530
- •560 PRINT"[3"[DOWN]"]": RETURN
- •570 FOR M=1 TO 5:NEXT:RETURN

DISK CHECK

If you have ever run into complications due to a disk error, you'll see the value of this program. I was going to make it read the entire disk, but not that many people want to read an entire disk for errors. So instead I gave you a choice of ways to read errors on a disk. In fact, I crushed the program into only 15 lines to make it easy to type in and useful for everybody. You can elect to:

- 1. Check Whole Disk (examine the entire disk for errors).
- 2. Quick Check (check only the first sector of each track).
- 3. Check 1 Track (examine only the track you specify).
- 4. Exit/End (quit program and enter regular mode).

If your program is free from errors, you will not see any error messages on the screen. If you're not very sure if the program works or not, simply try it out with a name brand commercial program, especially if the disk rattles during the load. Don't worry if you don't want your drive to rattle during the check; the program has been written to avoid rattles. If you want to use the no rattle routine for other things, just list line 5 and replace the ONAGOSUB7,8,9 with CLOSE15. Then type NEW, go up, delete the line number, and press RETURN. The drive light will appear for a second. Now load your own program. One message of warning: Put a write-protect tab on every disk you want to check. This program has a tendency to make errors of its own. This rarely happens though, so don't worry. — Myong Paek Portland, OR

- ·1 CLR: A=53280: POKEA,.: POKEA+1,.: PRINT"[C LEAR][GREEN][DOWN]DISK ERROR CHECKER:": PRINT"[DOWN][DOWN][RIGHT]1. CHE";
- •2 PRINT"CK WHOLE DISK":PRINT"[DOWN][RIGH T]2. QUICK CHECK":PRINT"[DOWN][RIGHT]3. CHECK 1 TRACK"
- -3 PRINT"[DOWN][RIGHT]4. EXIT/END":INPUT"
 [DOWN][DOWN]YOUR CHOICE"; A:IFA<10RA>4THE
 N1
- -4 PRINT"[3"[DOWN]"]INSERT DISK TO CHECK.
 ":WAIT198,1:PRINT"[DOWN][DOWN]CHECKING[3
 "."][DOWN]":IFA=4THENEND
- •5 OPEN15,8,15:PRINT#15,"M-W";CHR\$(106)CH R\$(0)CHR\$(1)CHR\$(133):ONAGOSUB7,8,9
- •6 CLOSE15: POKE198, 0: PRINT"[DOWN] ERROR CH ECKING COMPLETE.": WAIT198, 1: GOTO1
- •7 FORT=1TO35:GOSUB11:FORS=OTOLS:GOSUB13: NEXT:NEXT:RETURN
- ·8 FORT=1TO35:S=0:GOSUB13:NEXT:RETURN
- •9 POKE198,0:INPUT"WHICH TRACK (1-35)";T: IFT<10RT>35THEN9
- •10 GOSUB11:FORS=OTOLS:GOSUB13:NEXT:RETUR
- •11 LS=16:IFT<31THENLS=17:IFT<25THENLS=18 :IFT<18THENLS=20
- •12 RETURN
- -13 OPEN2,8,2,"#":PRINT#15,"U1,2"0;T,S:IN PUT#15,E,E\$,T\$,S\$
- ·14 IFE<>OTHENPRINTE"[LEFT], "E\$", "T\$", "S\$
- 15 CLOSE2:RETURN

BORDERLINE

Do you have programs that wait for a key to be pressed before continuing on their merry way? Some people call it a refreshing pause. Personally, if nothing is happening on the screen, I call it nap time. If you feel like I do, and want to add some spice to those pauses, try *Borderline*.

Borderline adds a multitude of colorful stripes to your monitor's border. The stripes move continuously downward until the user presses a key. There are versions for the C-64 and the C-128.

Just add *Borderline* to your own programs. Whenever you want the border to begin its colorful scroll, have your program SYS 700 for the C-64 or SYS 3072 for the C-128. For example:

100 SYS 700

will activate Borderline until a key is pressed. For the C-128,

100 BANK 15:SYS 3072

will do the job. BANK 15 insures proper activation (just in case the bank configuration was previously switched).

On both computers, the value of the keypress is returned in location 251. So, if your program is using *Borderline* in lieu of a GET statement, a line such as

110 PRINT PEEK (251)

will let your program know what key was pressed.

Borderline can be activated in direct mode also. SYS 700 [RETURN] will activate the C-64 version. BANK 15:SYS 3072 [RETURN] will activate it on the C-128. (Once again, BANK 15 is a precaution.)

Both versions of *Borderline* can be relocated by changing S in line 1. Remember to SYS to the new location if you do change it.

—Buck Childress Salem, OR

64 VERSION

·1 S=700:REM *** CHANGE S TO RELOCATE ***

- C-64 VERSION ***

 •2 PRINTCHR\$(147):PRINT:FORJ=STOS+20
- •3 READA:POKEJ, A:X=X+A:NEXTJ:IFX<>3473THE NPRINT"ERROR IN DATA[3"."]":END
- •4 PRINT"THE DATA IS LOADED[3"."]":PRINT: PRINT"SYS"S"TO ACTIVATE[3"."]":END
- •5 DATA32,228,255,240,3,133,251,96,238,32,208,162
- ·6 DATA90, 202, 208, 253, 141, 18, 208, 240, 235

128 VERSION

- ·1 S=3072:REM *** CHANGE S TO RELOCATE **
- * C-128 VERSION ***
- •2 PRINTCHR\$(147):PRINT:FORJ=STOS+20
- •3 READA:POKEJ, A:X=X+A:NEXTJ:IFX<>3468THE NPRINT"ERROR IN DATA[3"."]":END
- •4 PRINT"THE DATA IS LOADED[3"."]":PRINT: PRINT"SYS"S"TO ACTIVATE[3"."]":END
- •5 DATA32,228,255,240,3,133,251,96,238,32,208,162
- ·6 DATA85,202,208,253,141,18,208,240,235

THE GREAT ESCAPE

The Commodore 128's BASIC 7.0 is full of features, but the usefulness of some is not apparent. From immediate mode, one can hit the ESCape key and then either a 'W' or 'V'. These two ESCAPE commands control the scrolling capabilities of the screen or window. The 'W' scrolls the screen downward every time the ESCape key and 'W' are entered. The opposite holds true for the 'V' command: the screen scrolls up. These commands do not seem helpful from immediate mode, but from within a program one can accomplish many things.

of

By entering the program example below, one can see these two commands at work. The program displays the phrase ">>> G A M E O V E R << <" at the top of the screen. Next the phrase is moved to the bottom, then to the top again. This procedure repeats until the phrase is centered on the screen. To initiate an ESCAPE command from within a program, the "CHR\$(27)" must be used before issuing the command. The ASCII value 27 turns on the ESCAPE mode on the C-128.

- ·1 A\$="[3">"] G A M E O V E R [3"<"]"
- ·2 A\$=LEFT\$(A\$,40)
- •3 L=LEN(A\$)
- •4 TB=INT((40-L)/2)
- •5 SCNCLR
- ·6 CHAR, TB, O, A\$
- •7 S=24
- ·8 DO WHILE S>O
- •9 FOR I=1 TO 2
- •10 FOR J=1 TO S
- •11 PRINT CHR\$(27);
- ·12 IFI=1THEN PRINT "W";: ELSE PRINT "V";
- •13 NEXT J
- •14 S=S-1
- ·15 NEXT I
- ·16 LOOP
- •17 END

To make the phrase start from the bottom of the screen and move in the opposite direction, change lines 6 and 12 to

6 CHAR, TB, 24, A\$

12 IF I=1 THEN PRINT "V"; : ELSE PRINT "

-Michael Jaecks Alamogordo, NM

WAIT A MINUTE

For those who write BASIC games which require a joystick—after you have set up the game and want the player to press the joystick button to begin the game, use the following statement:

WAIT 56320, 16, 240

This command is better than the common method of using a variable to PEEK the port and the AND operator to mask all but Bit 4. You can change it to WAIT 56321,16,240 and the computer will wait for the pressing of the fire button of a joystick plugged into Port 1. –Joshua Guy Springfield, IL

THE CURTAIN EFFECT

Without a boring explanation, here is a machine language routine that when called from your BASIC program (using SYS LOC) will clear the standard Commodore 64's screen in an exciting new way! It does it in a fashion much like opening a set of curtains. Type it in and see!

> Andrew Vajoczki Brantford, ONT

- · 100 LOC = 50000: REM FULLY RELOCATABLE
- ·125 FORT=OTO103:READA:CH=CH+A:POKELOC+T, A:NEXT
- ·135 IF CH<>15839 THEN PRINT"ERROR IN DAT A":STOP
- ·140 SYS LOC: REM USE ANYWHERE IN PROG.
- ·1000 DATA 169,0,72,169,0,133,251
- ·1001 DATA 169,4,133,252,169,0,133
- •1002 DATA 253,169,216,133,254,162,0
- ·1003 DATA 160,1,177,253,72,177,251
- ·1004 DATA 136,145,251,104,145,253,200
- ·1005 DATA 200,192,20,208,239,136,169
- ·1006 DATA 32,145,251,160,38,177,253
- ·1007 DATA 72,177,251,200,145,251,104
- ·1008 DATA 145,253,136,136,192,18,208
- ·1009 DATA 239,24,165,251,105,40,133
- ·1010 DATA 251,165,252,105,0,133,252
- ·1011 DATA 24,165,253,105,40,133,253
- ·1012 DATA 165,254,105,0,133,254,232
- ·1013 DATA 224,25,208,182,104,168,200
- ·1014 DATA 152,192,20,208,155,96

INVISIBLE CHARACTERS

I have found that placing a keyboard graphic character immediately after the line number permits indentation of the BASIC line. For example, type in the following line:

10[s I][10 " "]REM

When you list the program, you will find that the REM has been indented eleven spaces. The SHIFTed character counts as one space, although it is invisible. Any keyboard graphic character obtained from using the SHIFT key or COMMODORE key can be used after the line number. Also, any executable line (such as one that starts with PRINT) can be indented and executed normally.

If you prefer just to have a blank line as a divider in your program, type a graphic character after the line number, then a space, and finally another graphic character. As an example, type in this line:

10[c R] [s P]

If you list the new line and position the cursor anywhere on that line, you may hit RETURN to delete it. By hitting RETURN on any other line, you will only return it to its normal unindented state.

If you want structured listings and own a Commodore 128 or C-64, I am sure you will appreciate this technique. Michael Jaecks

Alamogordo, NM

DLIST

The program above will allow you to list another program directly to the screen without having to go through the tedious process of saving your current program and then loading the program you wish to view. Just add this routine to whatever program you are currently working on and issue the command RUN 5000. After a brief moment the utility will ask for the name of the program you wish to see. Make sure the program is on the disk that's in the drive.

> Clifford Dedmore Jr. FPO San Francisco, CA

- .5000 PRINT"[CLEAR]ONE MOMENT[3"."]":POKE 49, PEEK(47): POKE50, PEEK(48): DIMT\$(77): T= 1:FORK=41118TOK+256
- ·5010 IFPEEK(K)>127THENA\$=A\$+CHR\$(PEEK(K) -128):T\$(T)=A\$:T=T+1:A\$="":GOTO5030
- •5020 A\$=A\$+CHR\$(PEEK(K))
- •5030 NEXT: 0\$=CHR\$(0)
- .5040 CLOSE15: OPEN15, 8, 15: INPUT" [CLEAR] PR OGRAM TO LIST"; A\$: OPEN2, 8, 2, ""+A\$: GOSUB5

Continued on page 97



COPIES 99.90% OF PROTECTED SOFTWARE WITH POWER AND PARAMETERS TO SPARE... AND ONE FREE UPDATE

- OVER 40 PARAMETERS built into the Invader Copying Modules are automatically called, when copying certain "Tough to Copy" disks. These are installed on SIDE 1 with all the INVADER V9.5 COPIERS.
- 170 EXTRA PARAMETERS, to copy recent disks that were impossible before are installed on SIDE 2 of the LATEST DISK-INVADER V9.5.
- USE WITH 1 or 2 1541/1571 Drives or compatibles or MSD Dual Drive and COMMODORE 64 and 128 (used in 64 mode).

FAST File Copy Included, with 8 second NO KNOCK PERFECT FORMATTER. FAST FULL Disk Copier for two 1541/1571 copies in under 1 minute FAST FULL Disk Copier for one 1541/1571 copies

PRICE P & P INCL. US \$36.50 CDN \$49.50

TO ORDER send check or money order to: Quebec residents, add 9% sales tax. All orders shipped within 48 hours. Telephone: 1-514-621-2085

AVANTGARDE 64

18 Place Charny, Lorraine Québec J6Z 3X9, Canada

SPRITESHELL 128

By Cleveland M. Blakemore



he C-128 has a really terrific BASIC interpreter: in fact, BASIC 7.0 is almost as advanced as IBM BASICA, or even ABASIC for the Amiga. The C-128 has a number of built-in commands that will produce arcade-quality games in the hands of the right programmers. But the commands have a number of critical drawbacks that limit the user to all but the simplest of games, depriving less advanced 128 owners of some of the game programming fun for which they would otherwise need to learn machine language. While I am a real whiz with assembly language, I do not expect everyone to learn it in order to enjoy the creative pleasure of making games on a computer!

A good example is *Planet Duel*, published in the April 1987 *Ahoy!* The game is really quite good for BASIC, but it suffers from a speed problem—and it would benefit greatly from keeping the sprites on the screen. Because the motion of sprites on the C-128 is interrupt-driven, they have the nasty habit of becoming "rogues" while BASIC processing is occurring during the game. They wander offscreen, collide, or even wrap around the playing area before BASIC can get around to checking their positions.

Obviously, what is needed is some kind of shell, an interrupt-driven program that will monitor the software-driven interrupt like a watchdog keeping the sheep in the pasture, saving the shepherd time he would normally waste doing the job himself!

When I sat down to write a program to cure these problems, I compiled a short list of the major annoyances involved with BASIC 7.0, and designed my machine language program, *Spriteshell 128*, around them:

- 1. Sprites tend to wander offscreen while a game is in progress.
- 2. SPRSAV is too slow a command to toggle different shapes for animation. POKE is not much better.
- 3. Joystick-driven movement for two players is too slow for any games which need the sprites to stay within certain boundaries.
- Player missiles (laser beam, custard pie, bullet, etc.) need to be turned off when they reach playing area boundaries so that they do not wrap around.

- 5. The program must be capable of determining which screen is in use, either the graphics area or the text screen.
- 6. The program must fit unobtrusively into an area which will not interfere with the memory set aside for sprites by the C-128's operating system.

The interrupt-driven program requires a little over 500 bytes and resides at location 4864 in the memory space normally reserved for "function key software," to quote Jim Butterfield's memory maps. If you BLOAD the object code into memory at the beginning of your program, you will be ready to utilize features like joystick-controlled sprite motion (for one or two players), complete control of sprite positioning to keep selected sprites within borders, interrupt-driven sprite animation at speeds which you can set, and even position checking to turn off certain sprites when they touch the borders you have designated!

The machine language routine has five entry points that should be set up correctly before you start the interrupt, respectively called XB, YB, SPRTG, FLAGS, and CFLAGS. Make sure you always specify *all* parameters when SYSing to these entry points, or the computer may place random values in the neglected locations. Each entry point is described below, along with its parameters.

XB=HEX\$(14D5)/DEC("5333")

(Used to set the maximum X-coordinate limits on the left and right.)

FORMAT: SYS XB, XL, XR

where XL=the left limit X coordinate border that you want the sprites to stop at from coordinates 1 to 255, and XR=the right limit X coordinate border, from 1 to 255. (The program assumes your limit is on the other side of the X-MSB line on the screen. If you want to set the right coordinate limit as close as possible to the X-MSB, then let XR=2.) Possible values such as XL=24, XR=65 will put the limits on the furthermost visible edges of the screen.

YB=HEX\$(14DC)/DEC("5340")

(Used to set upper and lower Y-coordinate limits.)

FORMAT: SYS YB, UL, LL

where UL=upper limit Y coordinate border (1-255), and LL= lower limit Y coordinate border (1-255). It is wise to make UL less than LL to avoid funny results on the screen. Possible values could be UL=50, LL=229 to place the borders on the furthermost visible edges of the screen.

SPRTG=HEX\$(14E3)/DEC("5347")

(Used to set the speed, number of sprites, and sprite blocks

... Announcing

THE COMMODORE USERS

MORE PROGRAMS THAN EVER BEFORE!

Ahoy Club!





An incredible offer from the publishers of Ahoy!...The Ahoy! Access Club. The Ahoy! Access Club offers members: discounts, rebates, coupons on products and services for your Commodore, a Commodore calendar of events, and much, much more! Members will also receive "The Clipper," an exclusive bi-monthly news bulletin. But the best thing about the Ahoy! Access Club is that it's FREE! to all Ahoy! subscribers. Subscribe today! and along with your first issue of Ahoy! you'll receive your official Ahoy! Access Club membership card...vour ticket to super savings and bonuses you can only get from Ahoy! Don't miss out on this fantastic offer. The Ahoy! Access Club...if you own a Commodore - this club is for you!

THE COMMODORE MAGAZINE THAT OFFERS YOU MORE

to be used for interrupt-driven toggling of sprite shapes.)

FORMAT: SYS SPRTG, TS, TN, SB

where TS=speed at which you wish to toggle the sprites between two shapes, and TN=number of sprites to be toggled. Sprites one and two are not toggled so that they may be used either for two players or a player-missile combination. Setting TN to six, the maximum, will toggle sprites three through eight. SB will be the number of the sprite block base of two shapes to be toggled. This number will be the first of two shapes in memory that will be toggled. You have to supply the sprite data at the given memory location, 128 bytes of data that should start at SB*64 in memory. A good location would be 56, the beginning of the C-128's allocated memory for sprites. Setting SB to 56 will toggle the sprite shapes between 56 and 57, the shapes present in SPRITE 1 and SPRITE 2 when in SPRDEF mode.

FLAGS=HEX\$(14F5)/DEC("5365")

(Used to activate joystick movement and sprite toggling, and set the number of players using interrupt-managed joystick movement.)

FORMAT: SYS FLAGS, OF, NT, NP



where OF=a zero or non-zero value. A non-zero value in this location turns on joystick-controlled movement, and a zero value turns it off. This is useful for eliminating movement at certain times during the course of the game—for example, right after the player's spaceship is destroyed. NT is also either a non-zero or zero value to turn sprite toggling on or off respectively. NP is the number of players you want to use interrupt-driven joystick movement, where 0 means you want one player controlling sprite number one with joystick 2, or 1 signifies two players using joystick ports 1 and 2 to control sprites one and two. When you want to turn on joystick movement, sprite toggling and two-player joystick-driven motion, SYS FLAGS,1,1,1.

CFLAGS=HEX\$(14FF)/DEC("5375")

(Used to denote the sprite involved in collision checking, and the number of sprites that are to be kept in the "corral" you set with SB & YB.)

FORMAT: SYS CFLAGS, SC, NS

where SC=the number of the sprite (minus 1) that you wish to turn off whenever it collides with one of the borders set in either XB or YB, and NS=the number of sprites (minus one) that you wish to be involved in border checking. To keep all sprites within borders, set NS=7. Setting NS to zero will only keep sprite one within the designated borders. Normally you would SYS CFLAGS,1,7 if you wanted to have a one player game with sprite one using sprite two as a missile. Whenever sprite two touches one of the borders, it will be turned off. This really comes in handy for *Space Invaders*-type games where your laser fire is continuously moving offscreen and threatening to wrap around. Using this command will turn the missile off whenever it reaches the border you have set with XB or YB. To disable this feature, use any number higher than seven for SC.

When you have entered all these entry points with the appropriate values, SYS SHELL (HEX \$1300/DEC 4864) to start at the interrupt routine. It may sound complicated, but it's really quite simple.

One important point to note about the border checking is that sprites will be kept within the screen limits you have set, but they will not stop moving. If sprite five is moving diagonally and it hits the Y-coordinate border, it will continue creeping along the border in the direction it was headed previously on the X-axis. Thus, screen action won't come to a standstill whenever there's a collision with the border.

The sprites will vibrate when they hit the borders, because the C-128's routine is trying to move them off, while *Spriteshell* is trying to keep them on. At the higher sprite speeds (12+) set with the MOVSPR command, the vibration will be very rapid.

Note that two-player joystick movement is slower than one-player, because the interrupt is servicing each player's port on alternate turns. It should not pose any problem.

The program assumes you are using the GRAPHICS screen if you have any graphic mode enabled other than Continued on page 72

Reader Service No. 181

PS TO GEOS

and

for

NT

ers

ere

ck

For the C-64

By Shawn K. Smith

rint Shop Graphics to GEOS, or PS to GEOS for short, adds another dimension to the world of GEOS. PS to GEOS will allow you to import graphics designed for Broderbund's Print Shop into a format that can be used by other GEOS applications, such as geoWrite and geoPaint. And the graphics can be the ones offered by Broderbund or those offered by third party software houses such as Epyx.

ENTERING THE PROGRAM

PS to GEOS consists of two programs. This division is necessary to make it into a full blown GEOS application with icon. The first listing on page 95, PS TO GEOS.ML, should be entered with Flankspeed. Ahoy!'s mistake-free machine language entry program found on page 79. Be sure you understand how to use it before entering PS TO GEOS. ML. After you have typed in the listing, save a copy on your GEOS work disk. The second listing, BINARY TO GEOS, is written entirely in BASIC and should be entered as usual. It is not necessary to save this program on your GEOS work disk, but do save a copy for future use (hint!).

Once you have entered both programs, load BINARY TO GEOS, insert the *GEOS* work disk with PS TO GEOS.ML in the drive, and run the program. Answer the "ENTER NAME OF BINARY FILE" prompt with the name that you used to save PS TO GEOS.ML. After a short duration, *PS to GEOS* will be created, replacing the ML file created by *Flankspeed*.

DRIVING THE PROGRAM

PS to GEOS can be loaded by double clicking its icon from the GEOS deskTop. The first dialog box tells you to insert a Print Shop graphics disk. The next asks you to enter the name of the graphic you want converted. If you are unsure of the name, press RETURN and the names will be displayed one at a time until you see the one you are looking for. After choosing a name, you are told to place a GEOS work disk into the drive. Then the graphic is converted into GEOS format and saved in a Photo Scrap file. Note: if the disk contains a Photo Scrap file with information you wish to keep, save it in a Photo Album or rename the file before using PS to GEOS.

As with all other GEOS applications, PS to GEOS will reload the deskTop when it's finished.

Give PS to GEOS a drive, and I'm sure you'll agree that it does handle itself well in GEOS' world. \square

SEE PROGRAM LISTING ON PAGE 95

RENTING:

THE ART OF SPENDING A LITTLE TO SAVE A LOT!

At Wedgwood Rental we have made renting software an art. We have over 500 titles for the C-64, C-128, and Amiga Computers. By spending a little to rent you can use the latest software to find the programs you like. Then purchase only those used programs you know you want at less than retail prices. CALL TODAY FOR A LIST!

Call toll-free outside Texas: 1-800-433-2938
- Inside Texas call: 817-292-7396



WEDGWOOD RENTAL

5316 Woodway Drive Fort Worth, Texas 76133



Reader Service No. 197

COMMODORE 128 OWNERS THE REVISED CLONE ENDS THE SOFTWARE BACK-UP BLUES!

The complete update to the 1571 Clone is now being shipped. Our new manual is almost 50 pages long and explains all aspects. We improved the GCR & Nibble copiers and added a MFM Copy (back up IBM disks on Commodore?). The expansion section has over 50 files. Included is a block editor, auto boot maker. single or 2 side copy, copy to alt. sides, track analysis (sync marks, density, block size, GCR data, Hex data), bulk erase, format, copy & combine files, plus more. Over 25 selections from menus. Use with a 1 or 2 1571 drive system.

STILL ONLY \$49.95

BACKS UP MOST EVERYTHING

WE'LL STILL GIVE YOU \$10 TRADE IFOR YOUR OBSOLETE COPY DISK



Available from MICFO-DISTRIBUTING, INC 1342B Route 23 Butler, N.J. 07405 CALL: (201) 838-9027

\$10 UPGRADE for all registered 1571 CLONE MACHINE Owners VISA = MASTERCARD DEALER & DIST INQUIRES

Reader Service No. 198

Explore the Potential of Amiga!



NEW YORK October 10-12, 1987 LOS ANGELES January 22-24, 1988

CHICAGO July 22-24, 1988

Featuring

Keynote Sessions

Jay Miner, the Father of the AmigaTM, will open the New York AmiEXPO. R. J. Mical, the Designer of Intuition, will provide insights into software development.

Exhibition Hall

A sampling of exhibitors:

Activision, Inc. Amazing Computing Amigo Business Computers ASDG, Inc. Brown-Wagh Publishing Byte by Byte Central Coast Software Computer Systems Associates Creative Microsystems, Inc. Firebird Licensees, Inc. Lattice, Inc. Liquid Light, Inc. Manx Software Systems Microillusions NewTek, Inc. New Horizons Software PiM Publications, Inc. Octree Software

Amiga[™] is a registered trademark of Commodore-Amiga, Inc.

Word Perfect Corporation

Development Forums

Intensive working sessions with the leading Amiga developers, such as *NewTek*, detailing specific products.

User Seminars

- · The Architect's Amiga
- · Art Direction and the Amiga
- The Amiga in Video Production
- · Amiga MIDI: Lights, Sound, Action!
- The Ultimate Game Machine, Amiga
- · Amiga's Desktop Color Publishing
- "Vax in a Box" Amiga Engineering

* AND MORE *

For information call 800-32-AMIGA (in New York call 212-867-4663) or complete the form and return it to:

AmiEXPO Headquarters

Name	
Company Address	
Telephone —	
Amai -	Return form to: AmiEXPO Headquarters 211 East 43rd Street, Suite 301



A MIGA SIECTION

ROLLING YOUR OWN: TURNING YOUR TRACKBALL INTO A MOUSE

By Morton Kevelson



A Zebra-modified WICO trackball. The white connector (lower right) is from the optical encoder boards above and left. The associated circuit board has been replaced. The mouse adaptor jack is at top, left of center.

Last month we reviewed the Amigamodified trackball from Zebra Systems. In view of Zebra's limited supply, and since many of you may already own a trackball which is only gathering moss, we decided to present the details on doing the conversion yourself. Although the circuit is not complex. you will need some skill in electronic construction. You may also need an ohmmeter, or circuit continuity tester, along with the knowledge of how to use it. The accompanying schematic presents the circuit. If you have no problems following it, go ahead. As always, we make no guarantee as to the outcome of this project. You must assume all the risks of damage to your trackball or your computer.

This circuit should work with any Wico trackball. To our knowledge all the Wico trackballs have the same basic hardware. The various models differ only in their electronics, which gives them their computer-specific characteristics. We will be replacing the electronics with our own. We will also show how a second joystick connector should be installed on the trackball to allow the use of the mouse buttons in parallel with the trackball buttons.

Disassembly

Opening up the trackball is simply a matter of turning it over and removing the six recessed Phillips head screws. Hold or tape the two halves of the case together so that it does not open while it is upside down. The ball is heavy and probably adverse to impact, and the roller bearings are spring mounted. These parts tend to leap out of the trackball under the influence of gravity. If you open the trackball while it is inverted, you will probably never get to see it in its original state.

Carefully examine the insides of the trackball, taking note of all the components and their locations. Notice that the ball rests on three roller bearings. The single bearing roller in the lower right corner is an idler bearing. Each of the two larger bearings, one at the top and one to the left, have a black slotted wheel attached to the end of the shaft. Observe that each of these wheels passes through a black "U" shaped assembly mounted on a small circuit board. These are the optical sensors which convert the rotational motion of the wheels into a series of electrical pulses. There are actually two optical sensors in each assembly. The mechanical spacing of these sensors generates a series of pulses which may be decoded to yield both the speed and direction of rotation of the trackball.

Each optical assembly is equipped with a four wire connector. If you follow the wires you will see that they ter-

Featured This Month:

Rolling Your Own: Turning Trackball into a Mouse	
Space Quest	
Disk-2-Disk	56
Butcher	57

PARTS LIST


One 4093B Quad 2-Input NAND Schmitt Trigger (CMOS) Four 12000 Ohm resistors One 100 Ohm resistor One 1N4001 Diode One Joystick extension cord (Radio Shack 276-1978) Miscellaneous: IC socket, circuit board, push button

minate in an 11 pin connector which also contains the two wires from the trackball's push button. The optical assembly at the top translates vertical rotation of the ball. The sensor to the left translates horizontal rotation.

If your trackball has two push buttons, the wires from the second button will be terminated separately. The cable assembly is terminated on a 1½ by 2" circuit board fitted into a pair of slots at the lower right hand corner. The joystick cable is terminated here as well. This circuit board will be removed and replaced by the circuit on the accompanying schematic.

Assembly Notes

If you are using an Atari style trackball you will have to replace the joystick cable. The Amiga mouse requires eight wires in the joystick cable, one more than in the cable supplied with the Atari version. We suggest using a 10' joystick extension cable for this purpose. Before cutting this cable in two, give some thought to the length of wire you will need for your setup. The female connector will be used for the Amiga's mouse port. The male connec-

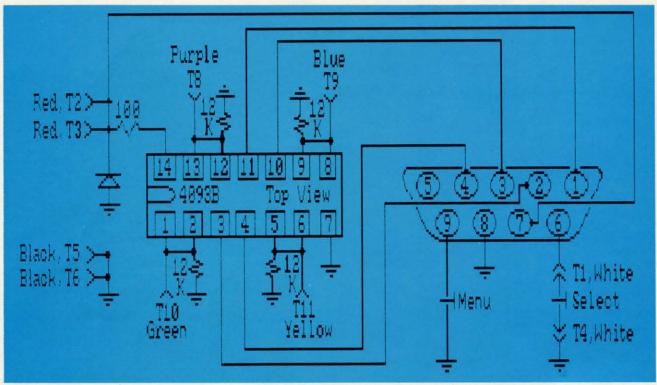

Notes:

- 1. Terminals T1-T11 and the associated wire colors correspond to the wiring of the trackball's internal connector.
- 2. The joystick pin arrangement is viewed from the end of the cable which is terminated in the female connector.
- 3. To use the mouse buttons with the trackball, connect pins 6, 8, and 9 of the cable terminated in the male connector to the corresponding pins inside the trackball.

SPACE QUEST Sierra On-Line Amiga (512K) Disk; \$49.95

The introduction of the Amiga and other 68000-based home micros marks the dawn of a golden age of computer adventures. Game formats developed within the limitations of the 6502 machines have provided the foundation for the more complex authoring systems publishers are currently unveiling.

Computer adventures are benefiting greatly from the expanded memory and enhanced audiovisual effects of 16-bit



Space Quest: janitor in a conundrum. READER SERVICE NO. 172

computers such as the Amiga. Designers who once cut plots to the bone and nervously counted each animation for fear of exhausting memory can now create adventures which rival novels in depth and complexity.

The play-mechanics of *Space Quest* is the latest permutation of the system Sierra introduced in 1984 in Roberta Williams' *King's Quest*. This ground-breaking fantasy epic blended outstanding animated illustration, a fluid joystick control system, and a parser to produce a dynamic, real-time gaming experience.

The Game System

Jeff Stephenson, who programmed this edition of *Space Quest*, was co-designer with Chris Iden of the overall system. It features pop-up text windows, multiple solutions to some of the puzzles, and pseudo-3-D animated graphics. The parser interprets compound sentences, which makes it easier to perform activities such as giving an item to another character. Function keys make it simple to repeat a

command, erase a line, pause the action, save or restore a game-in-progress, or start over from scratch.

A status line at the top of the screen shows the player's current score, the maximum attainable number of points, and whether the suitably stirring music is toggled "on" or "off." Clicking the righthand mouse button activates a menu bar which duplicates the effects of most of the function keys.

The solitaire gamer guides *Space Quest's* protagonist with the mouse, a joystick, or the keypad, and enters action commands through the keyboard.



Touches of sarcasm and irony keep the adventure from getting too solemn.

MOUSEPORT

Pin Function

- 1 Vertical
- 2 Horizontal
- 3 Vertical Quadrature
- 4 Horizontal Quadrature
- 5 Mouse Button 2 (not used)
- 6 Mouse Button 1 (left/select)
- 7 +5 Volts
- 8 Ground
- 9 Mouse Button 3 (right/menu)

TRACKBALL CONNECTOR

Wire Color Function

- T1 White Select push button T2 Red +5 Volt, vertical
- T3 Red +5 Volt, horizontal
- T4 White Select push button
- T5 Black Ground, horizontal
- T6 Black Ground, vertical
- T7 (No connection)
- T8 Purple Vertical #1
 T9 Blue Vertical #2
- T9 Blue Vertical #2
 T10 Green Horizontal #1
- Tll Yellow Horizontal #2

Instead of directly controlling the hero,

the mouse, pad, or stick moves a small

pointer around the screen. When the

user holds down the left button, the fig-

ure on the screen moves toward the

pointer. Another click causes it to stop

in place. This system, though excep-

tionally straightforward, is not always

easy to work. The novice can expect

to spend some time running into door

jambs, walls, and objects while learn-

the center of the screen in pop-up win-

dows, which makes messages much

easier to read than in adventures which

print them in the same message box

which accepts typed input. Hitting RE-

TURN or clicking the appropriate con-

troller button removes the latest block

part, but the main character could have

more detail and move more naturally.

Illustration is excellent for the most

The program's text output appears in

ing to steer with precision.

of text.

tor will be used for the mouse extension to which the Amiga mouse may be reconnected.

If you are installing a second push

If you are installing a second push button, take careful note of the track-ball's construction. Although there is plenty of empty space inside the track-ball, there are numerous projections from the inside of its case. A possible location for the second button is right beneath the first and above the plastic cable clamp projection inside the case. If you are installing the mouse connector, a good place for the cable hole is directly below the existing cable. You should pass the entire cable through the hole, although only three wires are used for the mouse push buttons.

We will leave the actual layout of the circuit board to your own ingenuity. The schematic and the adjacent tables include the functions of and the wire colors for the trackball's wiring harness. We have also tabulated the functions of the Amiga's mouseport. We suggest you retain the original connector and use an 11 pin header (0.1 inch spacing) with your design. The total cost for parts for this project should be less than \$10.00.

ine" them and get a well-written explanation. Unfortunately, it isn't always easy to tell what an object is supposed to be or, worse, what the designers have called it. Sessions of "guess the word" disrupt the flow of the plot and may cause some frustration.

The Story

The Star Generator is a super-scientific device which can turn a lifeless planet into a new star. It represents nothing less than salvation to the people of Earnon, whose own sun is slowly dving.

Scientists on the governing planet Xenon, working on the spacelab Arcada, have just perfected the Star Generator. But before they can use it to rescue Earnon, the piratical Sariens strike! These renegades from Earnon swarm over the Arcada, kill everyone they meet, and try to carry the Star Generator to their battle cruiser Deltaur.

And you? Why, you're a janitor on the Arcada. While you slumber in a storage closet, ducking your work as usual, the Sariens launch their attack.



You can find out with the

TIME TRAVELER

computer program from NCI. Tells you Academy Awards, World Series winners, prices, presidents, headlines, annual income, avg. cost of home, calendar, much more. 1900-1986. Sell printout at flea mikts, shows, by mail. Great party gift. Send \$39 for disk, or \$1+SASE for printout. Also includes TRIVIA game. Educational, interesting. For C64 & 128 with any printer. Not copy projected.

FAST 1541. Cartridge makes 1541 load AND save 5x faster Adds new commands: dload, dsave, scratch, directory, back-up, rename, append, record#, collect \$25.



205 McCormick Avenue Hawkinsville, Georgia 31036 Telephone 1-912-783-1158 Visa/MC/Check

Reader Service No. 185

With most of the crew and scientists dead, it's up to you to save the day! To win *Space Quest*, the hero must escape the Arcada with his life, visit the planet Kerona, meet a society of super-intelligent subterraneans, and penetrate the Sariens' battle cruiser.

The attitude of designers Scott Murphy and Mark Crowe toward their subject matter can be guessed from the fact that they call their team "Two Guys from Andromeda." Sarcasm and irony keep Space Quest from getting too solemn and inspire the gamer to the kind of freewheeling action which meshes perfectly with the style of the story. The overall mood can be likened to movies such as "Star Wars" and "Raiders of the Lost Ark," with a somewhat greater emphasis on humor.

Space Quest is involving, challenging, and sometimes even laugh-out-loud funny. It's a potent mixture calculated to provide many hours of entertaining adventuring for Amiga owners.

Sierra On-Line, P.O. Box 485, Coarsegold, CA 93615 (phone: 209-683-6858). — *Arnie Katz*

DISK-2-DISK Central Coast Software Amiga with 1020 Disk Drive Price: \$49.95

In the June 1987 issue we described a method for the bidirectional transfer of files from 1541 format disks to Amiga format disks (*C-64 to Amiga File Transfer*, p. 51) which did not require the use of a telecommunications channel. The procedure required a C-128 computer with a 1571 disk drive, an Amiga with a 1020 disk drive, *DOS-2-DOS* from Central Coast Software, and *Big Blue Reader* from S.O.G.W.A.P. Software. In the same issue we included reviews of both the aforementioned format conversion programs.

At the time we felt we were pretty clever putting together such a diverse collection of hardware and software to solve a common problem. In fact, Commodore also thought the idea was clever, as they intend to distribute copies of the article to all their dealers as an example of the versatility of both computer systems. As a result we were somewhat nonplussed by the arrival of a review copy of Disk-2-Disk from Central Coast Software. It seemed as if Central Coast Software had gone ahead and eliminated the need for our carefully choreographed procedure with a single disk. We did breathe a small sigh of relief as we noted that this time the ink had a chance to dry on our report before we had to start again.

In brief, *Disk-2-Disk* eliminates the intermediate step (using the IBM disk format) in our previous article. *Disk-2-Disk* endows an Amiga and a 1020 disk drive with the ability to read and write 1541 format or 1571 format disks.

Unlike DOS-2-DOS, which employs a command line user interface, Disk-2-Disk has adopted a full-blown Amiga-style, mouse-driven, gadget-laden operating window. Directories from both the source and destination disks are automatically displayed in their respective windows. Files are selected by pointing and clicking. The keyboard is used only for changing file names or entering the wild card characters for batch operations.

Four types of file transfers are provided. One is a direct transfer without any data conversion. The next two involve the translation of PETSCII to

ASCII. The translation may be done from upper/lower case PETSCII or from upper case/graphics PETSCII. The file translation also includes the conversion of all carriage returns (CHR\$(13)) on the 1541 side to line-feeds (CHR\$(10)) on the Amiga side. As a rule the C-64 uses the carriage return as a paragraph marker while the Amiga requires a linefeed. Interestingly enough, this last feature is not mentioned in any of the documentation which accompanied *Disk-2-Disk*.

The fourth type of file transfer is for use on BASIC 2.0 or BASIC 7.0 files which have been saved as sequential text files. This translation does several things. To begin with, spaces are inserted between all BASIC keywords. These spaces are required by AmigaBASIC, but are on optional on the C-64 or C-128. Next, all BASIC keywords which are not valid in AmigaBASIC are flagged by preceding them with a REM**. These steps give you a good start towards converting the file to AmigaBASIC. Finally, a BASIC program icon is created for the file.

Disk-2-Disk recognizes all of the 1541 file types. The only limitation is with relative files, where Disk-2-Disk ignores the side sector data.

Disk-2-Disk is even able to format 1541 single sided or 1571 double sided disks. However, there are some significant limitations to what can be done with the Amiga 1020 when it comes to formatting and writing to a 1541 format disk. Most other disk formats read and write data from and to the disk at a constant rate. This means that each track will contain the same amount of data even though simple geometry shows that the outer tracks of a disk are physically longer than the inner tracks. Thus for most disk formats the data density on the disk varies with the track with the highest density at the center of the disk.

The 1541/1571 reads and writes data from and to the disk at varying rates, four different rates to be exact. The fastest data rate is associated with the outer tracks (1-17). The slowest data rate is used on the inner tracks (31-35). Intermediate data rates are used for tracks 18-24 and 25-30. As a result the outer tracks of a 1541 disk contain more data than the inner tracks. This is generally

referred to as variable density recording, a term which is somewhat misleading. A better description would be variable rate recording. in fact the data density between the inner and outer tracks, as recorded on a 1541 formatted disk, is actually more uniform than the densities which result from constant data rate recording.

What it all comes down to is that due to hardware limitations of the Amiga 1020 disk drive, Disk-2-Disk will only format tracks 18-35/53-70 on a 1541/ 1571 format disk. When writing to the disk, preference is given to tracks 18-35 with tracks 1-17 being reserved for the last. On the other hand there does not seem to be a similar limitation going in the other direction. Disk-2-Disk is perfectly capable of reading any track on a 1541 format disk. This means that the largest files which can be transferred from the Amiga to a 1541 disk which is formatted by Disk-2-Disk have to be less than half the capacity of the 1541 disk.

Within the aforementioned limitations, *Disk-2-Disk* provides for substantial control of the file transfer process. Text files may be viewed on the Amiga display. Since the various ASCII-PET-SCII translations are in effect while viewing, the results can be used to determine which type of translation to use. On the 1541 side the format check scans a disk for errors. The BAM check verifies that all the files on a disk have been properly allocated in the block availability map.

Our tryout of *Disk-2-Disk* was not without problems. We were never able to get the 1541 format routine to work. Transfers from the Amiga to the 1541 seemed to fail about half the time. On the other hand transfers from the 1541 to the Amiga were done without any difficulty.

We spoke to Richard Chamberlain of Central Coast Software about these problems. He indicated that *Disk-2-Disk* was very sensitive to the disk media when writing or formatting in 1541 mode. Some disk brands would not work at all while other brands worked just fine. The only solution is to experiment until you find a brand that works. The recommended procedure is to preformat the disks on a 1541 or 1571 disk drive. Amiga files should be

The Disk-2-Disk working window. 1541 files are to the left. Size of 1541 files is estimated using 254 bytes per block. READER SERVICE NO. 192

transferred only to disks which contain non-critical data or to disks which have been previously backed up.

rd-

is-

be ata

ter

at-

an

ant

lue

iga

lly

41/

18-

or

0-

at

Mr. Chamberlain also indicated that the next release of Disk-2-Disk would contain some additional file conversion options. These would handle the conversion of word processor files which were saved using the C-64 screen codes instead of PETSCII. In particular, support is being provided for PaperClip, Pocket Writer, and Speedscript.

In conclusion, if you already have the setup which we described in C-64 to Amiga File Transfer, we see little reason to add *Disk-2-Disk* to your setup. If you do not have a 1571 disk drive or a C-128 computer, then Disk-2-Disk is your only option for direct disk transfers at this time. Disk-2-Disk will also be of interest to users who have traded in their C-64 for an Amiga. Due to the limitations of the Amiga 1020 disk drive when writing 1541 files, we recommend that Disk-2-Disk only be considered if your primary purpose is transferring files to the Amiga.

Central Coast Software offers one more option for users who do not own an Amiga 1020 disk drive. For a service charge of \$15 per order plus \$6.50 per disk they will convert your 1541 format disks to Amiga format disks. These prices include the 3.5" diskettes and return shipping via UPS surface.

This service is intended for users with a limited number of files to transfer. which does not justify the investment in an Amiga 1020 disk drive.

Central Coast Software, 268 Bowie Drive, Los Osos, CA 93402 (phone: 805-528-4906). - Morton Kevelson

BUTCHER **Eagle Tree Software** Amiga with 512K Price: \$37.00

Butcher may be described as a bit plane cleaver. However, such a description would be inadequate, as Butcher does far more than cleave bit planes. Butcher is a collection of image processing utilities for graphics saved in the Amiga's IFF format, of which bit plane cleaving is only one function. Butcher will work with all of the Amiga's standard graphic formats, ranging from single bit plane (two color), highresolution/interlaced (640 × 400 pixels) image to six bit plane, hold and modify (4096 color) low-resolution (320×400) image. It will automatically adjust the display mode to accommodate the image format to be worked up.

The interface between the user and Butcher follows the Amiga's Workbench conventions. Access to all functions is through a collection of dropdown menus. Custom requestors are provided for all functions which require additional user input. Requestors are fitted with an ample supply of button and slider gadgets. Many functions can also be directly accessed by pressing

BACKUP PROTECTED SOFTWARE FAST.

From the team who brought you Copy II Plus (Apple), Copy II PC (IBM) and Copy II Mac (Macintosh) comes a revolutionary new copy program for the Commodore 64/128 computers.

- Copies many protected programs - automatically. (We update Copy II 64/128 regularly to handle new protections; you as a registered owner may update at any time for \$15 plus \$3 s/h.)
- · Copies even protected disks in under 2 minutes (single drive).
- Copies even protected disks in under 1 minute (dual drive).
- · Maximum of four disk swaps on a single drive.

 Includes fast loader, 12-second format.

Requires a Commodore 64 or 128 computer with one or two 1541 or 1571 drives.

Call 503/244-5782, M-F, 8-5 (West Coast time) with your in hand. Or send a check for \$39.95 U.S. plus \$3 s/h, \$8 overseas.

\$39.95

Central Point Software, Inc. 9700 S.W. Capitol Hwy. #100 Portland, OR 97219

Central Point

Backup utilities also available for the IBM, Apple II, Macintosh and Atari ST. This product is provided for the purpose of enabling you to make archival copies only

the Right Amiga key in combination with another key. We have included a table of Butcher's menu options as a quick summary of its functions.

can be done with a full-featured program such as Deluxe Paint. Of course the Draw function is only meant to be a convenience feature for minor adjust-

BUTCHER'S MENU OPTIONS				
Project	Tools	Process	Convert	Slice
Load	Undo	Edge	Histogram	400 to 200
Save	Draw	Filter	Quick Merge	200 to 400
Save As	Reverse	Mosaic	Auto Merge	640 to 320
Print	Flip	Slice Plane	Auto Chop	320 to 640
Print Part	Palette 1	Density Slice	Change Depth	
Ask Mode	Palette 2		Lo-res to HAM	
Title	Palette 3		HAM to Lo-res	
Clear	Make Palette			
Quit				

With a few exceptions the items in the first menu column should be familiar to users of any Amiga paint program. The Print Part function lets you select a portion of the image and dump it to the printer. Choosing the Normal option under the Print Part function will dump the selected part according to the Preferences setting with dimensions as if the entire image were being printed. Choosing the Enlarged option will dump the selected portion so as to fill the dimensions as set in Preferences. The Enlarged option should permit the printing of an image in sections for subsequent pasteup to a larger size. Unfortunately the portion selection process does not include a coordinate display, making precise selection of symmetrical portions difficult.

The Ask Mode options responds with the current display mode and the number of bit planes in the picture. Only standard size bit maps (320 × $200, 320 \times 400, 640 \times 200, 640 \times$ $400,320 \times 200 \, \text{HAM}$) were supported by the version of Butcher looked at. Pictures with other dimensions (brushes), Dual Playfield Mode, and Extra Half-Bright Mode cannot be modified by Butcher. Hold and Modify mode images may be converted to low resolution images and vice versa. However, most of Butcher's functions will not work directly on HAM images.

In the Tools menu the Draw function turns Butcher into a rudimentary bit map drawing program. The drawing functions include freehand sketching, lines, filled and unfilled boxes, and area fills. This is a long way from what ments. Butcher is not intended to be used as a drawing package.

Butcher maintains three palettes for the current image. Palettes may be copied from one to another, or they can remain completely independent. The Make Palette function provides for the total control of the image's color content. There are the usual settings for the adjustment of individual colors via red, green, and blue or hue, saturation, and value slider gadgets. The colors may also be sorted in ascending or descending order according to their relative intensity. In Butcher, intensity is defined as the sum of the red, green, and blue values.

The Make Palette requestor also contains a set of generalized color controls. These controls affect the red, green, and blue content or the hue, saturation, and value of all the colors in the image. This makes it easy to quickly adjust the overall appearance of an image. The adjustment range of the generalized controls is from -15 to +15.

The process menu encompasses several Butcher functions. The Edge function mathematically determines which pixels are part of an edge. A threshold



setting determines the sensitivity of the edge algorithm. A setting of zero will set an edge whenever a pixel differs from its neighbor. At the maximum setting edges are detected only between pure black and white pixels.

The Edge requestor offers several ways to display the image. The Map selection draws only the edges converting the picture into a line drawing. The map may be drawn in the darkest palette color against a background of the lightest color or in the reverse. Or the map may be drawn in the colors of the edge pixels. The Darkness slider adjusts the intensity of the selected edge colors. Choosing Enhance applies the edges to the picture itself.

Map operations involve a large number of repetitive calculations which require a substantial amount of time. We used a four bit plane, 640 by 400 pixel image to estimate the time required for various operations. A monochrome map required nearly five minutes. A color map took approximately seven minutes.

The Filter function removes isolated pixels or groups of isolated pixels. The size of the group is adjustable. Filtering is done only on the selected color and may be limited to a portion of the image. Filter operations were fairly quick: 10 seconds with our sample.

The Mosaic function converts the picture into blocks of colors. It effectively increases the size of the pixels. The size of the blocking is adjustable. The time for a Mosaic operation varied with the block size. Using a 2 by 2 pixel block required nearly 11/2 minutes. A 50 by 50 pixel block size was done in one second.

The Slice Plane option is the bit plane cleaver function we referred to at the start of this review. One or more bit planes may be removed in any combination, and individual bit planes may be examined. Slice plane operations are



practically instantaneous.

The Density Slice function treats the palette as a series of intensity levels ranging from black to white. Setting a point on this intensity scale results in a two color image. The set point may be slid up or down the scale. Density Slicing is a nearly instantaneous operation. The Density Slice Function supports two set points. If both are used the image may be divided up into four areas with each area a different color. The pseudocolors used by the Density Slice function are black, red, green, and yellow. Density Slicing may also be done in color. In this case the darker colors are progressively replaced with black as the slicing point is raised.

The Histogram function generates a pixel count for each color in the palette. The results are displayed as a bar graph of the relative totals. The Use button on the Histogram requestor gives an exact pixel count as well as a percentage of the total. The Histogram offers several options. A Merge operation changes all the pixels of one color into another. A Blend operation is similar to a merge except the resulting colors depend on the relative proportions of the original colors. The entire palette may also be sorted according to the number of pixels in each color. All operations can be performed on a selected portion of the image.

The Auto Merge function automatically merges, blends, and sorts the colors until the selected maximum number of colors has been achieved. The colors which are now devoid of pixels may now be redefined without changing the resulting image.

The Auto Chop function performs an Auto Merge till the number of colors in the palette has been reduced to fit in the specified number of bit planes. The Change Depth function discards bit planes without any regard

to support the various undo options. Butcher is a useful tool that no Amiga Graphic artist should be without. Eagle Tree Software, P.O. Box 164, Hopewell, VA 23860 (phone: 804-452-0623). -Morton Kevelson

MIGA

for the resulting colors.

number of bit planes.

ECTION

The remaining menu items are self-

explanatory. Note that for best results

the Auto Chop or Auto Merge functions should be used before using a

Slice function, which will reduce the

Butcher is designed to multitask with

other Amiga programs, but we did en-

counter some bugs. An attempt to ac-

cess Preferences to adjust the printer

settings while running Butcher brought

us a visit from the Guru. Butcher is

not copy protected and can be easily

transferred to other work disks. The

program occupies less than 80,000

bytes of disk space. As a rule graphic

operations are memory-intensive. Al-

though additional fast RAM is not

mandatory, it's recommended for work

with high resolution images. Butcher

maintains several copies of an image



At extreme left is a sample Histogram, followed by a series of four successive steps of a Density Slice operation in color. The large image at left is an Edge/Map operation in color, while directly above is the result of a Mosaic operation. READER SERVICE NO. 193









Disk Drive Problems?

SAVE Time and \$ with **Physical Exam**

Test Speed, Alignment and Stop position on your Commodore Disk Drive. Complete illustrated instructions to make necessary adjustments yourself! Specify drive, 1541, 1571, 8050, 8250, 4040, SFD 1001. Physical Exam \$39.95 each + shipping.



Epson Printers LX-800 \$196 **FX-86E** \$335 FX-286 \$489 EX-800 \$438 LO-800 \$489 GO-3500 \$1695 Professional Signs your created with C64/128 and printer. for Great school presentations, pointing out locations, advertising events and The Banner Machine with 5 fonts \$49.95.



The Banner Machine: with 5 letter styles in 8 sizes. Format left, center, right, tab and justify. 8 sizes of borders and 15 textured background shades. Banners can be saved on disk. The Banner Machine \$49.95 Additional fonts available


Cardinal Software 14840 Build America Dr. Woodbridge, VA 22191 Info: (703) 491-6494 Order Toll Free

800 762-5645

Reader Service No. 202

RED ALERT

For the C-64 **Tony Brantner**



ed Alert takes its cue from the arcade classic Missile Command. The object of the game is to defend six cities and your missile base from the enemy missiles falling from the sky.

Use Flankspeed (page 79) to type in and save a copy of Red Alert. After loading the program, type SYS 49152 and press RETURN to start. At the lower center of the screen is your missile base. There are three cities on each side of the base which you have to defend. The score, current wave number, and high score are shown at the bottom of the screen.

Using a joystick plugged into Port 2, press the fire button to erase the flashing title and begin play. Above the missile base is a cursor. Use the joystick to move the cursor around the screen, and press the fire button to launch a missile from the base. The missile locks onto the coordinates of the cursor, and explodes when it reaches its destination. Any enemy missiles that are within range are destroyed. Once a missile is launched, you can move the cursor and get ready to fire another once the first is detonated. You earn 10 points multiplied by the current wave for each enemy missile destroyed.

Each wave consists of a random number of missiles being dropped. While it's important to protect the cities, protecting your missile base is essential. If the base is wiped out, you are helpless until the wave ends. At the end of the wave, you are awarded an additional 100 points for every city left standing. For every 10,000 points, a short tune plays, and you receive a bonus city. If all six cities are still standing, the bonus city is saved until you need it. There are a maximum of 20 waves, and you can toggle the SHIFT-LOCK key to freeze the game.

SEE PROGRAM LISTING ON PAGE 89

THE WORLD OF COMMODO



The 1986 Canadian World Of Commodore show was the largest and best attended show in Commodore International's history. With 350 booths and attendance of over 38,000 users it was larger than any other Commodore show in the World - and this year's show will be even

World of Commodore is designed specifically to appeal to the interests. and needs of present and potential Commodore owners - from hardware to software. Business to Personal to Educational.

Exhibitors: Write or phone today to find out how you can take part in the World's largest Commodore

For information contact: The Hunter Group Inc. (416) 595-5906

60 AHOY! Reader Service No. 201

S.C.S.

By Tim Little

Send your questions about any aspect of Commodore computing to S.O.S., c/o Ahoy! Magazine, Ion International Inc., 45 West 34th Street—Suite 500, New York, NY 10001.

I have noticed that most of your *Flankspeed* listings chop off the end of the line, and won't enter correctly because of that. Also, why don't your ending addresses always correspond to the last line of your *Flankspeed* listings?

Frank Dobson
 Lubbock, TX

Flankspeed is just a data entry program. You tell it where in memory to store a program, and then you enter all the data. The program actually stores the data and uses a rudimentary checksum formula to prevent most typing mistakes. Let us take this line as an example:

COOO: A9 08 20 D2 FF 20 D5 C4 5F

The C000 is the hexadecimal address of the first byte of that row of numbers. The address of the second byte, 08, will thus be C001, the third byte, 20, will be stored at C002, and so on. The last byte on that line that will be stored is C4, which is byte C007. This leaves 5F, the last number on the line, unaccounted for. This number is the checksum. It allows Flankspeed to make sure that what you just typed is correct.

Thus, when you see an ending address at the start of the program listing, it refers to the address of where the last byte will be stored, which may or may not be the same as the number that is printed at the start of the last line. In fact, the only way you would have a full final line would be if the ending address were to end with either a 7 or an F.

I have bought a few of the *Ahoy!* diskettes, and I have also entered a few programs from your magazine by hand. But when I try to LOAD any ML programs and RUN them, all I get is a syntax error in some line I didn't enter, or just the READY prompt.

When I try listing the program, all I get is garbage on the screen, or just the READY again. What am I doing wrong?

-Lynn Kidder
Albany, NY

All ML (machine language) programs must be loaded into the computer by typing

LOAD "filename",8,1 (disk)

or

LOAD "filename",1,1 (tape)

Notice the ',1' on the end; that is not optional with machine language programs. If you omit the ',1' and you try to execute the program or try just to list it, very strange

things happen. The worst that could happen is that your computer will lock up, and you will have to reset it.


The correct way to execute these programs is to enter the proper SYS command after you have loaded them. The correct SYS number is printed in the magazine with the program, or in the article.

After having typed several issues' worth of programs into the computer, and having saved all of them onto my cassette drive, I find that I want to transfer them to my disk drive.

I have no problems transferring my BASIC *Ahoy!* programs, but how can I transfer my ML programs to disk from tape, or from one disk to another? —Wally Levy Tacoma, WA

To transfer from tape to disk, just LOAD and RUN Flankspeed. Then enter the starting and ending addresses as printed with the program you wish to transfer. Then hit F3 to load the program. When done, just hit F1 to save it, and when prompted for [D]isk or [T]ape, enter D for disk.

To transfer ML programs between disks, LOAD and RUN Flankspeed, enter the starting and ending addresses and hit F3 to load the program, insert the disk with the program on it, and answer the prompts. Then when the program is finished loading, hit F1 to save it, insert the disk that you want to copy the program onto, and answer the prompts.

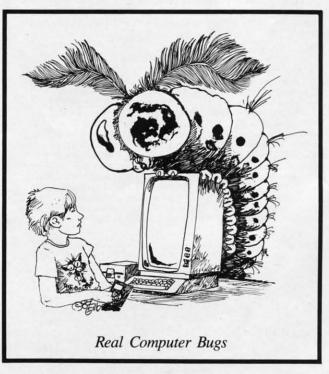

cles. Plotting points on a circle is a computation-intensive task. The six to one ratio in times could be because of different algorithms in the two machines. More likely it is because the 8088 processor in the PC has built-in multiply

and divide operations which speed up the heavy calculations.

930 DRAW, RND(0)*320, RND(0)*200

PC version:

C-128 version:

Continued from page 40

930 PSET(RND*320, RND*200)

Benchmark #10 draws 100 random lines. The two versions are listed with the C-128 version first:

'SICYEISI TSEICILIC

1030 DRAW, RND(0)*320, RND(0)*200 TO RND(0)*320,RND(0)*200

1030 LINE(RND*320, RND*200)-(RND*320, RND*

Finally, Benchmark #11 draws 50 circles with random centers and random radii less than 50 units. The two versions are as follows with the C-128 version first:

1130 CIRCLE, RND(0)*320, RND(0)*200, RND(0) *50

1130 CIRCLE (RND*320, RND*200), RND*50

If you are using the 40-column screen on the C-128, you should remove the GRAPHIC 5 statements from lines 950, 1050, and 1150.

1541/1571 Drive Alignment

1541/1571 Drive Alignment reports the alignment condition of the disk drive as you perform adjustments. On screen help is available while the program is running. Includes features for speed adjustment and stop adjustment. Complete instruction manual on aligning both 1541 and 1571 drives. Even includes instructions on how to load alignment program when nothing else will load! Works on the C64, SX64, C128 in 64 or 128 mode, 1541, 1571 in either 1541 or 1571 mode! Autoboots to all modes. Second disk drive fully supported. Program disk, calibration disk and instruction manual only \$34.95!

Super Disk Utilities

Super Disk Utilities is the ultimate utilities disk for the 1571 disk drive and C128 computer. An 80 column monitor is required. SDU will copy whole disks (with 1 or 2 drives), perform many CP/M and MS-DOS utility functions, edit any track or sector, trace files, copy files, rename a disk, rename a file, change disk format (without affecting data), scratch or unscratch files, lock or unlock files, erase a track or a whole disk, create auto-boot, assemble/disassemble drive RAM or ROM, analyze disk format, format in MFM, CPM+, 1541, or 1571 format, reads CPM+ directories, contains a 1571 drive monitor, fully supports a second 1571 drive, performs direct DOS commands and much, much more! Options window displays all choices available at any given time. Many utilities also work on the 1541 drive. No need for numerous utility disks! SDU does it all! Only \$39.95!

Free shipping & handling! No surcharge for credit card orders! Immediate shipping! Illinois residents add 8% sales tax. Order

Free Spirit Software, Inc.

538 S. Edgewood





La Grange, IL 60525 (312) 352-7323

CONCLUSIONS

The conclusions are up to you. The C-128 has sound and sprite graphics features which the standard PC cannot touch, although the PC allows expansion boards to provide almost any capability imaginable. The C-128 in FAST mode runs BASIC programs at roughly the same speeds as the PC. Disk access on the IBM PC is much faster than on the C-128. Disk access speed of the PC10 may be slower than the IBM PC the tests were run on. For standard programming, the two classes of machines are quite comparable.

It should be noted that there is a new breed of interactive BASIC compiler available for the PC (Microsoft Quickbasic and Borland Turbo BASIC) which gives the PC a significant speed and debugging advantage over every BASIC interpreter on any machine. If you are a serious BASIC programmer, one of these compilers could be reason enough to buy a PC.

The biggest advantages of the C-128 over the PC are basic price, sound, and graphics. The PC's biggest advantages are its expandability, 640K of RAM, and the wealth of technical, high-quality software and hardware available. The PC can readily handle data and software many times larger than the C-128 can. Some programs on the PC come with help files larger than 200K bytes, for example. It should be noted that software for the PC is generally more expensive than C-128 software, since much of the PC software is geared for business use.

For the PC, programs listed at \$99 are considered lowpriced. The best-selling word processors for the PC list for \$400 to \$500, although they can be bought via mail order for roughly \$200. Spreadsheet programs that cost \$200 to \$300 mail order are commonplace for the PC, although there are some that are closer to \$100.

Hardware for the PC in some cases is less expensive than C-128 hardware. Double-sided floppy disk drives are typically about \$100 for the PC. (Have you ever seen a 1571 for that price?) Hard disks storing 10 megabytes can be bought for under \$300 for the PC. Memory expansion boards providing 256K bytes or more cost less than \$150.

The PC10-2 lists for \$1199 with 640K of RAM and two floppy disk drives. It can be found for under \$900 from some stores. The C-128 and two 1571 disk drives still sells for over \$700 from most sources. Obviously you can get in on the ground floor of computing less expensively with the C-128 (or the C-64), but if you plan to expand much above the basic system, the initial differences in price may not be so significant.

You get a lot of computer for the money with the C-128. From this article, hopefully you have a better understanding of the PC class of computers. The Commodore PC10 "clone killers" also provide a lot of computer for the money. \square

SEE PROGRAM LISTING ON PAGE 81

SEALENZ

MASS DUPLICATOR Chip Level Designs C-64 with MSD SD-2 Price: \$25.95

cirsive difbeiply ons.

and

ich,

ost

uns

C-

the

ng,

ac-

ck-

IC

ro-

ıg-


of

It has been over three years since we reported on the MSD SD-2 dual disk drive for the C-64. Since that time MSD has dropped out of the Commodore market entirely. During its brief distribution a fair number of SD-2s were sold. Most of them ended up in the hands of small developers, user groups and individuals with a need for duplicating large quantities, of 1541 format disks. A modest investment in MSD-2 disk drives gives you the ability to go into the business of mass producing C-64 software.

Interestingly enough, the MSD SD-2 has always received some measure of support from the Commodore community. In particular, *Fasthackem* from Basement Boys Software has always included the SD-2 on its main menu. The reason for this support has recently come to our attention. All those thousands of copies of *Fasthackem* sold by the Basement Boys were created on their own SD-2 disk drives.

Although Basement Boys Software seems to have closed up shop, their influence lingers on. The *Mass Duplicator* from Chip Level Designs has been brought to market by Lawrence Hiler, an ex-Basement Boy. It is actually based on a design used by the Basement Boys for their own work.

The Mass Duplicator consists of two parts, a 24 pin mystery chip and a software driver on disk. The chip is a mystery due to the fact that its identifying markings have been removed. We quickly ascertained that it was simply two kilobytes of static RAM. The chip is readily installed in an empty spot on the SD-2's main circuit board. The SD-2 was originally designed for 6K of RAM but was ultimately manufactured with only 4K. The circuit board was never changed from the original design and carries all the traces for the additional RAM. This additional 2K of RAM allows the SD-2 to copy an entire track in a single pass.

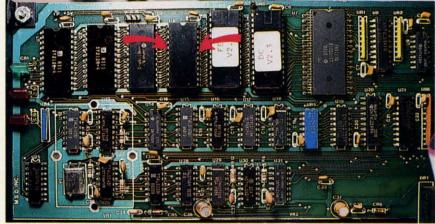

Mystery chip for the Mass Duplicator installed in the SD-2, between the drive's ROM and RAM chips.

READER SERVICE NO. 175

The Mass Duplicator's manual suggests that the chip may be easily installed by simply inserting the provided socket and bending its leads into contact with the circuit board. This is apparently an attempt to avoid the need for soldering skills. We feel that this approach is just asking for trouble. The socket should be soldered to the main circuit board to obtain reliable operation. The circuit board is readily ac-

ing to Lawrence Hiler, the high speed boot routine could only be achieved with a custom disk format. This sounds like a peculiar comment coming from an ex-Basement Boy. It seems to us that for an extra five seconds or so it should have been possible to make a disk which could be backed up.

The Mass Duplicator does all that it claims to do. All operations are selected from two full-screen menus.





All operations are chosen from Mass Duplicator's main (left) and nibbler menus.

cessible once the SD-2's cover is removed. The installation should take no more than five minutes.

The extra RAM opens up the possibility for very high speed operation with the proper software, which is provided on the accompanying disk. The driving program boots in less than ten seconds. The last three seconds consists of a screen shimmer which is sure to shake you up the first time you see it. Interestingly enough, the driving software can not be copied. Accord-

There are no fewer than four high speed copiers. The basic copier will duplicate a disk in 15 seconds without verify and in 22 seconds with destination disk verify. This copier will also handle some disk errors, but it will grind to a halt on errors 20, 21, and 22. The quick nibbler will handle most other disks in just 18 seconds.

A second menu screen customizes the nibbler on a track by track basis. This lets you select density (0-3) and number of synchronizing marks (1-99),

PHOTOS: MORTON KEVELSON

and toggles the short sync mode. You are on your own when it comes to determining just what settings will be required for a given task. Other than a table of normal values, no other data is provided on how to implement these options.

The main menu also provides an auto copier and an auto nibbler. This lets the SD-2 duplicate disks without the use of the computer. All the operator has to do is swap disks when the job is done. The version of the *Mass Duplicator* we looked at required that both the source and destination disks be swapped to trigger the auto copiers. Mr. Hiler has indicated that this will be changed so that only the destination disk has to be swapped. This would make much more sense for generating multiple copies of a single disk.

Mass Duplicator also takes the wait out of disk formatting, as two disks with unique names and IDs may be simultaneously formatted in just nine seconds.

COMMODORE AUTHORIZED SERVICE

POWER SUPPLY (C-64)	\$29.95
C-64 REPAIR	44.95
1541/1571 ALIGNMENT	35.00
1541 REPAIR & ALIGNMENT	75.00
C-128 REPAIR	95.00
1571 REPAIR	95.00
POWER SUPPLY (C-128)	84.95
NOISE/SURGE PROTECTOR	17.95
EXTENDED WARRANTY	CALL

Free Return Freight - Continental US Add \$10 for APO, FPO, AIR Save COD charge - send Check or Money Order. (Purchase Order Accepted)

Second Source Engineering

2664 Mercantile Drive Rancho Cordova, CA 95670 (916) 635-3725

Reader Service No. 204

Chip Level Designs is now shipping a replacement ROM for the MSD SD-2. This adds fast copy (15 seconds) and fast copy with verify (22 seconds) commands to the drive's repertoire. As of this writing we are still waiting for our copy of this chip.

The Mass Duplicator is an effective low cost utility for the SD-2 disk drive. Our sample has already received considerable use since its arrival a short while ago. If you currently have regular use for the MSD SD-2, the Mass Duplicator should be considered.

Chip Level Designs, P.O. Box 603, Astoria, OR 97104-0603 (phone: 503-861-1622). — *Morton Kevelson*

THE MSD DUAL DRIVE CANNON Computer Mart C-64 and the MSD SD-2 Price: \$34.95

When it rains it pours. More than three years since the introduction of the MSD SD-2 and after MSD has stopped producing it, we suddenly find several sources of third party support for the SD-2. The MSD Dual Drive Cannon is being produced and distributed by the same people who brought us the Kracker Jax Protection Busters, a series of disks full of parameters for copying protected software. The Kracker Jax disks presently consist of five volumes and are still going strong.

Although the MSD Dual Drive Cannon carries on Computer Mart's penchant for explosive titles, it falls into the category of a bona fide disk utility. This is in spite of the inclusion of 32 deprotection parameters on the distribution disk. Although the MSD SD-2 suffers from compatibility problems with protected software, it can be an excellent tool for duplicating many protection schemes. The irony of it all is that although the copied disks will run off a 1541 disk drive, they still cannot be loaded from the SD-2. The application of deprotection parameters will sometimes generate a copy which is usable on the SD-2. However, software whose very operation depends on the 1541 DOS routines will still not run.

The MSD Dual Drive Cannon makes a good companion utility for the Mass Duplicator (see above). Although it does duplicate some of the Mass Duplicator's functions, such as a whole

disk copier, the *Cannon* includes many additional functions such as an easy to use file copy utility and a full featured track and sector editor.

The file copy utility is based on the SD-2's built-in DOS copy command. Unlike the DOS copy command, you do not have to supply the source file names. The *Cannon* reads the disk directory into memory and allows you to choose any number of files to be copied from an onscreen listing. The most significant limitation to this approach is the inability to automatically rename the destination files as part of the copy process.

There are a total of three types of whole disk copiers in both manual single shot and automatic versions. The latter are triggered by the swapping of the destination disk and will run without the benefit of the computer. The nibble copiers will attempt to reproduce all data including non-standard formats and errors. This will reproduce many early forms of copy protection. The standard copier does not reproduce disk errors. The resulting copy is error free. This may result in the loss of some data; however, the intent is to patch up the resulting copy using an additional utility such as the Kracker Jax parameters. There is also a copier which will stop when it encounters a disk error. This feature can be used to verify that your source data disks have not been corrupted. An alternate approach could have been to copy the entire disk while reporting all errors. All the whole disk copiers require about one minute to copy an entire disk.

The Cannon includes a full-featured track and sector editor. The screen display of this utility bears a strong resemblance to the public domain sector editor known as Disk Doctor. That is, all 256 bytes of a disk sector are displayed as a single block, using the PETSCII character set, on the top half of the screen. We still prefer the open arrangement of four byte groups used by the original Clone Machine. The lower half of the screen displays the character under the cursor in both hexadecimal and decimal. The data may be edited by entering either text, decimal, or hexadecimal characters.

The lower half of the screen also contains a menu of the available commands. This part of the screen may be

REVIEWS

switched to a 10-line disassembly of the sector data, starting with the byte under the cursor. The disassembly is continuously updated as the cursor is scrolled through the data. All unrecognized values are displayed as the so-called unimplemented 6502 opcodes whenever possible. The continuous updating of the disassembly in this fashion makes it difficult to follow a line of code, as the results are dependent on the cursor position.

many

asy to

tured

n the

and.

, you

file

k di-

ou to

cop-

most

oach

ame

copy

s of

sin-

The

g of

rith-

The

luce

nats

any

The

uce

ers of

to

an

ker

ier

sa

i to

ave

ap-

en-

All

out

red

is-

re-

tor

18.

is-

alf

en

ed

he

Overall the MSD Dual Drive Cannon provides an easy user interface for all disk maintenance on the MSD SD-2. The program appears to be written in Blitz!-compiled BASIC with some machine language modules. As a result, some operations are not as quick as they could be. The main menu also includes direct access to the disk drive's scratch, rename, and format commands. All of these require manual entry of the appropriate data.

Computer Mart, 2700 NE Andersen Road, Vancouver, WA 98661 (phone: 206-695-1393). *Morton Kevelson*

THE MSD DOS REFERENCE GUIDE Computer Mart Price: \$29.95

Last but not least we have a detailed dissertation on the workings of the MSD DOS. The major part (140 pages) of this 200 page book consists of a fully annotated disassembly of the 16 kilobytes of code in the MSD ROMs. This detailed listing is accompanied by a ten page ROM map of all the major DOS routines and a seven page listing of the MSD's 4 kilobytes of RAM. The remaining chapters include information on the 6511Q microprocessor, some details on the operation of the MSD DOS, a description of the hardware, and some sources of additional information on or related to the workings of the MSD disk drives.

The final chapter is a listing of various demonstration programs and utilities which incorporate direct calls to the DOS. These include the mandatory programs for creating the various DOS errors used by early forms of Commodore disk copy protection. Each program is listed in BASIC with machine language routines in DATA statements and a disassembly of the corresponding code.

The book includes a double sided disk with both sides chock full of additional data as well as the programs in the book. We also found a collection of MSD utilities, a 651lQ disassembler, program compatibility listings, MSD parts lists, and MSD user lists among other interesting items.

The MSD DOS Reference Guide is a valuable collection of data on the MSD disk drives which will be of interest to advanced users of the drive. The information was obviously compiled at the expense of considerable time and effort by an individual (David W. Martin) with a deep interest in the subject matter. This book is a must have for anyone interested in delving into the intricacies of the MSD disk drives.

Computer Mart, 2700 NE Andersen Road, Vancouver, WA 98661 (phone: 206-695-1393). — Morton Kevelson

(Note: The Mass Duplicator, the MSD Dual Drive Cannon and The MSD DOS Reference Guide are available as a package from Computer Mart for \$79.95.)

THE BOSS SoftTools Commodore 64 Disk; \$35.00

This program is almost a dream come true for all the modem fanatics in our reading audience. You finally have an alternative to writing machine language subroutines to perform each useful input/output operation using the RS-232 modem port on your C-64.

Before *The Boss* was written, BASIC programmers were forced to write very cumbersome code, consisting primarily of POKE and PEEK statements which made little sense even to the programmer when looked at months later.

With this program any experienced BASIC programmer can take advantage of an expanded BASIC language, which now includes commands to facilitate sending data, receiving data, detecting phone ringing and carriers, as well as many other vital features.

If you really want to write any type of program that uses the modem, and if you must write it in BASIC, then you

A Powerful Wordprocessor

for the Commodore 128®

Selected

for the 1987

CES Software

Showcase

Award.

From the author of Fontmaster II comes Fontmaster 128, an enhanced version for the Commodore 128. This powerful word processor with its many different print styles (fonts), turns your dot matrix printer into a more effectual tool. Term papers, newsletters, and foreign languages are just a few of its many applications.

- * Program disk with no protection uses hardware key
- * Supplement disk includes foreign language fonts
- * 56 Fonts ready to use
- * Font editor/creator included
- * On screen Font preview
- * 80 column only
- * Supports more than 110 printers

Commodore 128 is a registered trademark of Commodore Business Machines, Inc.


ACTO Inc. 2804 Arnold Rd. Salina, Ks. 67401 (913) 827-0685

Reader Service No. 205

should consider this package. You no longer have to worry if your new machine language routine is written correctly, or if it is reliable enough to use in your BBS program.

The package does have a few short-comings, but as you will see, they are not of any serious consequence to those individuals who should be most interested in buying this program. The most annoying fact is that the program will not work with the C-1670 modem (or any 1200 baud modem); but we have been notified that the new version, which should be out by the time you read this, will feature an option for 300 and 1200 baud compatibility as well as upload and download routines.

Although the program does include a DIAL command, it has no option for touch-tone phones, and the slow speed of the pulse dialing is almost unbearable. Since this program will be used mainly by people who want to write BBS programs, which don't need to dial many outside numbers, this is only a minor annoyance.



sue of Ahoy! Our official binders turn a year's worth of Ahoy! into a textbook on Commodore computing! These quality-constructed binders use metal rods to hold each magazine individually, allowing easy reference to any issue without removal. Sporting a navy blue casing with a gold Ahoy! logo imprinted on the spine, these binders will be the pride of your computer bookshelf.

To order, send \$12.45 (US funds) for each binder desired to:

Ahoy! Binders

45 West 34th Street - Suite 407 New York, NY 10001

(Outside Continental US add \$2.50 per binder. Allow 4 to 6 weeks for delivery.)

The program comes with a spiral-bound, 58-page manual. Although the manual is well-written, and it does explain each command quite clearly, it still has a few mistakes, some of which contradict previous instructions. Just keep that in mind while you are writing code with this program, and be prepared for any problems that this might cause.

Although our version came with a progress report, describing what kind of bugs the manufacturers are aware of and what enhancements they expect to add in the next version, we found that the program sometimes had problems receiving data from the modem. But the included report did warn us about this, so we could take the necessary precautions. It was still an annoying bug, but we were assured that it would be fixed in the next version.

The Boss' command set is divided into five different groups. They are Set-Up, Modem I/O, Disk I/O, Conversion, and Miscellaneous commands.

The Set-Up commands allow you to define which modem you have and what channel you want to assign it to. They also allow you to set the drive and the device number of any drives being used. Setting the time or date can also be done in one command, and the program keeps track of each until you reset or turn off the machine.

The real heart of the program is held in the Modem I/O command set. These commands let you send data and receive data with the modem. You can also, using single commands, hang up or pick up the phone line, and detect the carrier or ringing. It is these commands alone that would justify the cost of the program.

The Disk I/O commands are very useful and, considering that they are not needed for modem programs, really are a bonus. The new commands let you read the directory into a string array, print the directory, and search for a specific name in the directory with the option of using real wildcards. The program also monitors the error channel and stores the status in DS, with the error name in DS\$, similar to the C-128.

Conversion functions should save many programmers a lot of effort. The conversion routines allow data to be converted from ASCII to PETSCII or

vice versa, and they also allow case changes in either direction.

The Miscellaneous commands offer a strange but wide variety of command types. Similar to the Apple command of the same name, the POP command will let the programmer remove the address of the last GOSUB performed (that is very useful when you must use nested GOSUBs). *The Boss* also has a built-in mini-terminal program which can be activated in just one command, even from a BASIC program.

In order to facilitate the construction of a BBS program, *The Boss* also includes a single command that will sort *any* string array in either ascending or descending order. Of course, no BASIC extension program would be complete without an INSTR function, which locates one string within another and returns the starting location of the target.

Considering the price, versatility, and quality of this program, it is a must-have for anyone who intends to do any serious modem programming. But I suggest that you wait until the aforementioned flaws are corrected before you make the investment.

SoftTools, Snowdon P.O. Box 1205, Montreal, PQ H3X3Y3. -Tim Little

AWARDWARE Hi Tech Expressions Commodore 64/128 Disk; \$14.95

There are few experiences more satisfying to computer owners than making something attractive to show off to their friends. It's especially gratifying when their efforts result in items that are practical as well as pretty.

AwardWare is the latest in the line of creativity programs from Hi Tech Expressions. Like the other products from this Florida company, AwardWare provides budget-conscious computerists with an extremely versatile tool for creating personalized printed materials. The computerist can also make an award disk to send to computer-owning friends, who can look at and print the citation even if they don't have a copy of the program itself.

Versatility and ease of use makes AwardWare a double value. Along with awards and certificates, templates are provided to create personalized licenses, bank cheques, memorandums, tic-

EVIEWS

AwardWare offers more than 20 graphics for dressing up certificates, plus assorted borders and type styles. READER SERVICE NO. 221

kets, coupons, signs, and letterhead stationery. A quartet of special designs create prize ribbons. There are even seals to decorate checks and trophies.

Creating a personalized award is a snap. The manual guides beginners step by step through a sample certificate, but it's such a straightforward process that most people could dope it out for themselves just by following the menus.

First the computerist selects the format of the award. There are 60 templates, both horizontal and vertical styles, and a couple of dozen more designs for special uses. After entering the number of the template, a work screen pictures the form. The computerist cursors from one area to another of the template to complete its parts.

There are 20 border designs, plus a special option that lets the creator make up text borders, or even combinations of text and art. There are a few standards for formal awards, but the majority of the borders are pretty, if not downright cute. Hearts, apples, crescent moons, sailboats, even dinosaurs are some of the devices that march obligingly around the frame for trendy awardmakers.

After selecting the border, the computerist chooses a graphic to adorn the creation. There are 20 designs or the award can be left plain. Pictures included are partying animals, apple, bear, book, butterfly, computer, dinosaur, doghouse, dollar, flag, goose, graduation, hand, heart, mathematic, money bag, music, shooting star, sports, and team sports.

Next the computerist chooses the font from five type styles: Block, Ital-

ic, Old English, Roman, and Script. These appear on the awards in small, medium, or large type, depending on the format of the template selected. Some templates have more than one text block; the computerist chooses the type style for each block individually, then writes the citation, verse, or message on the certificate.

After completion of the main body of the award, the computerist chooses the type of signature block. This may be a signature with the date and official title of the signor, signature and date on the left with decorative seal on the right, signature and date on the right with seal on the right, or signature and date centered at the bottom of the page. There are five seals: a bear, a sheep with "ewe's great" logo, a "you're the best" ribbon, a star, and a thumbs up with "terrific job" logo.

There's a lot packed into the Award-Ware program. It contains a top-quality collection of templates for awards and certificates, and enough of the special designs to give the computerist a lot of ways to use the program. By varying the borders, type styles, and graphics, there is virtually no limit to the number of personalized citations that can be created.

AwardWare belies its budget price with high quality and ease of usability. It's a lot of fun to make up these special awards, for serious or trivial occasions, and it's great to tell a friend how high he ranks in your favor (or how he's bombed out!) with a personalized, low-cost greeting that couldn't be purchased in any store!

Hi Tech Expressions, 1700 NW 65th Avenue, Suite 9, Plantation, FL 33313 (phone; 305-358-5153). - Joyce Worley

READER SERVICE INDEX

Page	Company	Svc. No
31	Abacus Software	177
C-4	Access Software	213
42	Acorn of Indiana, Inc.	211
12	Activision	219
9	Alsoft	208
47	Avantgarde 64	195
43	American Int'l Computer	179
52	AmiEXPO	_
41	Artworx	174
60	Cardinal Software	202
57	Central Coast Software	192
57	Central Point Software	215
63	Chip Level Designs	175
15	Combase, Inc.	209
11	C.O.M.B. Direct Marketing	_
C-2	CompuServe	177
71	Computer Mart	188
72	Computer Mart	187
44	Computer Repeats, Inc.	190
C-3	Data East USA, Inc.	200
30	Emerald Component Int'l	183
50	Emerald Component Int'l	181
15	Epyx, Inc.	220
62	Free Spirit Software, Inc.	206
67	Hi Tech Expressions	221
4,5	Lyco Computer	196
16	Marathon Software	210
6	MicroProse Software	189
43	MicroProse Software	199
51	Micro-W Distributing Inc.	198
41	Mindscape	173
19	Montgomery Grant	186
55	Nationwide Computer Inds.	185
10	Okidata	217
24-29		193
11	Quantum Computer Services	
34	Quantum Computer Services	180
69	Recovery!	
39	Rent-A-Disc	191
75	RK Productions	203
64	Roger Wagner Publishing, In	
10	Second Source Engineering	204
54	Seikosha America Inc. Sierra On-Line	216
12	Soft-Byte	172
42		212
17	Strategic Simulations S & S Wholesalers	176
7	TC Electronics	194
8	Timeworks	207
18	Trans Com, Inc.	214
51	Wedgwood Rental	184
60	World of Commodore	197
65	Xetec, Inc.	201
	Actec, Inc.	205
14	Ahoy! Disk Magazine	-
23	Ahoy! Subscription	-
34	Ahoy!/QuantumLink Offer	180
37	Ahoy! Disk	-
38	Ahoy! Back Issues	-
49	Ahoy! Access Club	-
66	Ahoy! Binders	-
	blisher cannot assume responsi	bility
f	or errors in the above listing.	



Send letters to Flotsam, c/o Ahoy! Magazine, Ion International Inc., 45 West 34th Street-Suite 500, New York, NY 10001.

! WE HAVE A WINNER!

That was the winning message of Bob Blackmer's Wizard Tag II...and that's what we have this month in the person of Steve Spivey of Inverness, FL. As of this writing more than 25 readers have completed the ninth level of Wizard Tag II and written us with the message above to prove it.

We'd originally planned to name as winner the reader who finished with the best time. But because validation of times is not possible we decided that Steve, whose letter bore the earliest postmark, would receive the prize of a year's subscription to the *Ahoy! Disk Magazine* (\$97 value) and the honor of play-testing Bob Blackmer's next programming effort. Sorry to those players who posted better times—but if we did this on the honor system, no one listed here would have won anyway. You wouldn't believe some of the outrageous "time remaining" claims we received (and disqualified). However, each of the runners-up listed will receive a free *Ahoy! Disk*.

Some comments from contestants:

"I find much more pleasure in writing programs than in playing them, but this one was an exception."—Robert Cook

"I can guarantee that my joystick will never be the same! It's a super game. My husband and two kids like it too."— Diane Upton

"I dare you to make a game I can't solve in one or two tries. Your graphics and animation are great, but there's just no challenge! I am looking forward to being challenged;



UNIVADERS (July '87)

The documentation for *Univaders* omitted the instructions for actually starting the game. Once you have entered and run the program, you should have a new file on the disk called UNIVADERS. Turn off or reset your machine and type

LOAD "UNIVADERS",8,1 [RETURN]

After the READY prompt appears on the screen, type SYS 49152 [RETURN] and the game will start.

PLINK & PLONK (July '87)

A few readers were confused by the extra spaces that appeared in the middle of lines 4000 and 4010 of *Plink & Plonk*. As the majority of you guessed, they don't belong there. Simply move the last segment of each line up and continue typing.

ZING! Review (July '87)

No author was listed for the review of Zing! in July's Amiga Section. It was Morton Kevelson.

don't disappoint me."-Wayne Metz

"I found Wizard Tag II to be the second best game I've played on a Commodore. Vortex from the January '87 Ahoy! is the leading Commodore game and Lode Runner on the Apple is the best game I've ever played—and the only good reason to own a sorry Apple."—Steve Spivey

"Guess what I did on my 13th birthday with one arm tied behind my back? I beat your game. The next one (had) better be harder if a person just turned 13 can beat it."—Jay Luce

"This game is much better than the first Wizard Tag. How about creating Wizard Tag III with an ever bigger maze?"—Bryan Kollar

"Should there be a sequel to Wizard Tag II, I'll be waiting at the keyboard."—Paul Browning

"If you're planning a sequel to Wizard Tag II, a bigger board might be more challenging. The floors with snakes could contain 2 or 3 snakes, and possibly more dangers, like a cat or dog. As for the Wizard, you could have him randomly set anywhere on the board."—Leonel Marchan

We'd be glad to hear from readers who surpass the times posted here—however, no more prizes will be awarded. Not for playing *Wizard Tag II*, that is. But we had so much fun with this contest that we'll be sure to hold another one soon.

Player	Date of Postmark	Time Remaining
Steve Spivey (Inverness, FL)	5/28	1:47
Victor Lams (Ann Arbor, MI)	5/29	0:45
Wayne Metz (Kansas City, MO)	5/30	1:49
Cindy Kamora (Lake Ariel, PA)	5/30	0:45
Rajesh Michael (Bedford, TX)	6/1	7:23
Craig Russell (Beaumont, TX)	6/2	1:49
Roger West (Houston, TX)	6/3	1:59
Michael Goodrich (Houston, TX)	6/3	0:31
C.J. Jones (Yulee, FL)	6/4	1:16
Richard Temps (San Diego, CA)	6/6	1:17
Eric L. Stout (Topeka, IL)	6/7	2:53
Bryan Kollar (Nanticoke, PA)	6/8	2:06
Gary L. Grable (Mason, MI)	6/8	0:58
Diane L. Upton (No. Adams, MA)	6/8	0:41
Paul Browning (Clarksville, TN)	6/9	0:53
Leonel Marchan (Waukesha, WI)	6/10	0:44
Douglas Blodgett (Portland, ME)	6/11	2:31
Mark Finn (Eureka, MO)	6/11	2:06
Beth Ann Jones (Milton, VA)	6/11	0:39
J. Sergio (Bristol, CT)	6/14	0:37
Chris Burrus (Lexington, KY)	6/15	?
John Puffpaff (Jacksonville, NC)	6/16	1:02
Jay Luce (Marble Falls, TX)	6/16	0:43
David Ray (Wesson, MS)	6/18	3:48
Tim Reddy (Catlin, IL)	6/18	0:04
M. Stamps (Louisville, KY)	6/22	3:24
Teresa Hawkey (Lawrence, KS)	6/22	3:44
Robert Cook (Braintree, MA)	6/22	2:48
Mark Johnson (Davenport, IA)	6/23	2:24
Shawn Miller (Kekaha, HI)	6/23	0:21

Victimized by Compulsive Gambling?

Today, over 5 million Americans suffer with the addiction of compulsive gambling. Spending house payments in trying to win back losses... borrowing from friends, relatives and employers, even stealing. This disease destroys marriages, careers...entire lives.

Now there's help, hope and a tomorrow for these millions. And, helpful suggestions for those friends and family members close to the gambler who are also suffering, personally or business-wise. A growing dilemma? Yes! Is HELP AVAILABLE? Yes!

Recovery! is published monthly in magazine and newsletter form.

This publication is tailored to help spouses, relatives and employers of known or suspected compulsive gamblers...and the recovering gambler, him or herself.

The information and articles in *Recovery!* can help you understand and help cope with this growing addiction and will be most beneficial to other *related addictions*. Monthly issues offer expert advice on:

- · How to help the compulsive gambler stop
- · Spotting danger signs in a loved one
- · Self-help for the spouse in coping
- How to successfully support and deal with the emotional needs of children in the gambler's family
- · True life stories and how the recovery was affected
- · Gambling's effect on corporations and businesses
- · Financial guidance and investment tips
- · Health and fitness for full recovery and relief of stress
- Meeting places, seminars through the U.S. and abroad for both the gambler and spouse
- · Current treatment centers
- Correspondence section to exchange ideas across the country
- Toll-Free Hotline Number
- Ideas for constructive substitutions....and much, much more!

Special Corporate Seminars Available Upon Request

	se send FR on helping gambler.		P.O. E Throg	overy! Box 280 ggs Neck Station x, NY 10465-9998
ADDRESS				
CITY		STATE		ZIP
If Applicable: Co	o. Name			
A	ddress			
#	Employees	Compar	ny Contact_	

CHAINMAIL!

For the C-128

By Cleveland M. Blakemore

RASH!
...SWISH!
...UUMMPPHH!
...AARRGGH!

The Crimson Knight staggers you with a blow that knocks you nearly senseless, then batters you toward the edge of the pit. You cartwheel helplessly, almost losing your balance, then regain your equilibrium just in time to leap forward beneath another well-timed swing that would've plunged you to your death. Your green armor is dented in several places where you've been struck before, and you are weak from injury.

If you can only make it to the mystic flame! You dodge around the opposite side of the pit, avoiding the thrusts of your opponent, finally reaching the flickering sacred fire in the corner of the dungeon, and you plunge your enchanted sword into its heart.

In seconds your body is flooded with newfound strength, nourished by the magic blaze, and you turn in the firelight to face your enemy, who squares off for another round of blows....

You must be playing Chainmail!

This is a two-player game for the C-128, written in a hybrid program of machine language and BASIC Seven-point-oh.

The graphics are excellent, but the complexity of the game may seem deceivingly simple at first. *Chainmail!* is a game of strategy and dexterity, with infinite variations.

The game takes a moment at the beginning while it loads the ML data, POKEs the sprite shapes, and draws the dungeon. Then an original little tune I composed for the game begins playing in three part harmony until both players press their joystick buttons.

The graphics represent a view of a dungeon deep in the earth, as seem from above. The two player's figures are knights, as seen looking down into the room.

The Crimson Knight is player one, and the Green Knight is player two. Each player has a complementing "strength" bar offscreen.

There are two ways to be killed in Chainmail!

The first is to let your strength bar drop below zero. The second way to is fall (or be pushed) into either of the two three-dimensional vertical shafts in the room. When a player is killed, a skull and crossbones will appear in his location. The contest of knights is over, and you will be returned to the main title screen.

To rotate your onscreen alter ego, simply move the corresponding joystick left to rotate clockwise, right to rotate counterclockwise.



To move him around the screen, depress the fire button and push the knight in the direction you want to move, limited only by the walls of the dungeon. The motion is very smooth and quick, because it is serviced by an interrupt routine.

To swing your sword, depress the joystick button by itself. You'll hear a swish, and your sword will flick out directly in front of you.

This is strictly a duel of noble knights. Hitting your opponent from behind is not permitted. You must be facing your opponent to strike him with the sword. To injure him, you must catch him off guard with his sword in the raised position. To block an opponent's blow, your sword must be out.

After a few good hits from your enemy, you may find yourself getting pretty weak. Have no fear! Merely touching one of the sacred fires in either corner of the room will restore you to full strength in a matter of seconds. Only one knight at a time can refresh his strength, however. If both knights try to touch the healing fire at the same time, they will be pushed back.

A much quicker way to kill the other knight is to shove him into one of the pits, where his armored figure will whistle down to the bottom and land in a crumpled heap, dead.

Whenever one knight shoves another, he is pushed in the direction his opponent is pointing. For instance, to push you opponent into the shaft on the left, rotate until you are pointing in that direction, then situate yourself behind his left shoulder and begin shoving. Unless he maneuvers out of the way in time, he will topple into the shaft with a

Continued on page 97



SO GOOD. EVEN WE CAN'T BELIEVE IT.

Think of the best disks in your library; the very best ones, the cream of the crop. Chances are, those are the same disks that you haven't been able to back

BULL'S-EYE was created for only one reason: to back up the impossible. To archive the programs that are protected with the newest, toughest routines on the market.

We'd like to go into more detail, but we can't—these titles are so hot, we can't mention their names in this ad. But you know the ones we mean. Just think of the biggest names in software. Think of the most complex and effective protection schemes you've ever run up against. Now think of the very best archival software on the market today...

BULL'S-EYE-from Kracker Jax.

ONLY \$19.95

KRACKER JAX®

A REVOLUTION IN ARCHIVAL SOFTWARE!

Eracker Jax is the powerful parameter copy system that is taking the country by storm! What IS a parameter! It's a custom program that allows your 1541 or 1571 disk drive to strip all copy protection from your expensive software, leaving you with INPROTECTED. TOTALLY BROKEN back-ups that from your expensive software, leaving you UNPROTECTED, TOTALLY BROKEN back-ups can even be copied with a simple fast copier.

- Kracker Jax is the BEST program of its kind!
 Kracker Jax will back up titles that the nibblers
- CAN'T!
- er Jax requires NO special knowledge to
- · Kracker Jax strips protection in a matter of SECONDS
- Kracker Jax is priced RIGHT-just \$19.95 per
- Kracker Jax is UNPROTECTED—easy to back up!
 Kracker Jax updates are available QUARTERLY!

VOLUME FIVE INCLUDES A POWERFUL NEW C64/C128 FAST COPIER!

ALL NEW VOLUME FIVE

VOL. 1-4 STILL AVAILABLE. ONLY \$19.95 EACH!

NEW HACKER'S UTILITY KIT

Are you ready to take control of your software? Let us help! Our **Hacker's Utility Kit** contains the most impressive array of tools ever assembled in a single package! You get:

- WHOLE DISK USAGE/ERROR/DENSITY SCANNER—get needed info fast!
- WHOLE DISK USAGE/ERROR/DENSITY SCANNER—get needed into fast!
 GCR EDITOR—view raw data the way your computer reads it!
 FAST DATA COPIER—won't write errors!
 1 OR 2 DRIVE NIBBLER—state of the art!
 FILE TRACK AND SECTOR TRACER—find any sector link in a file fast!
 BYTE PATTERN FINDER—scan the disk for any cattled.

- CUSTOM COPIER CREATOR—the only one of its
- RELOCATABLE M/L MONITORS—including drive
- FAST FORMATTER-programmable tracks or
- DISK FILE LOG-quickly find file start and end

So how good is this package? Just remember that it's put out by **Kracker Jax**, the people who live at the cutting edge of archival technology. That's how good it let

ONLY \$19.95

KRACKER JAX® REVEALED! THE BOOK

At last—Kracker Jax takes you beyond the protection barrier. The secrets of un-protecting software are yours with Kracker Jax revealed!

We'll show you exactly how to defeat five different protection schemes encompassing scores of current programs. Our tutorial has twenty specific examples to lead you step by step, to a new level of knowledge. Here's what you

Kracker Jax revealed.
 A reset switch.
 A utility disk.
 20 parameters on disk.

ONLY \$23.50 COMPLETE!

Please allow two weeks for delivery.

THE SHOTGUN

Those of you who have used our **Kracker Jax** parameters know just how good they are. Can you imagine the kind of nibbler we could put out? Well, you don't have to imagine it because it's HERE! **THE SHOTGUM**, our new premium nibbler utility, is available two ways:

- THE SHOTGUM by itself-offered to you at the unheard of introductory price of
- THE LOADED SHOTGUE—Packaged WITH 32 of the most popular Kracker Jax parameters ever created—only \$19.95!

Whichever version you order, you'll find THE SHOTGUN to be loyal to the Kracker Jax tradition of more quality for less money.

THE C-128 CANNON

Here's the package you C-128 owners have been waiting for! The C-128 CANNON gives you more power than you ever hoped for! Just look at some of these capabilities

- NIBBLER-Works with single or dual 1571/1541
- FAST COPIER—Great for data disks or use with
- FILE COPIER—Makes file maintenance and ma-
- nipulation easy: 1581 FAST COPIER—For use with the new high speed 3.5" drive! 1581 FILE COPIER—For high speed file manipu-
- MFM COPIER—Copies unprotected IBM and CP/M
- T/S EDITOR-Works with 1541, 1571, and the new
- ERROR SCANNER—Complete with on-screen display! DENSITY SCANNER—Check for altered densities
- track by track!
 DIRECTORY EDITOR—Alter & organize your disk
- KRACKER JAX-You also get 100 of our most popular parameters!

You've seen nibblers alone that sold for thirty-five or forty dollars. And the 100 Kracker Jax parameters are a twenty dollar value. Yet the ENTIRE C-128 CANNON utility package sells for just \$34.95. Never before has this much power and control been integrated into a single, affordable product. If you own a C-128, you deserve the C-128 CANNON!

C-128 owners, this is the package of your dreams—only \$34.95

No, we don't have the first graphic label utility on the market—but we have the best one! Without doubt, the Wizard is the hottest graphic label program around! Check out some of these features:

Wizard is the hottest graphic label program around: Check out some of these realities.

*Use Print Shop, Print Master, or your own custom graphics! *Print a graphic & up to 8 lines of text on a standard label! *Uses pop-up menus/includes extra graphics/saves labels onto disk! *Works with both Epson & Commodore compatible dot-matrix printers! *Will print different text styles & sizes on appropriate printers! *Hi-res preview of up to 4 different graphics on screen at one time! *Machine language programming for ultra-fast speed and flexibility! *Special CATALOG feature lets you print titled display sheets of your Print Shop, Printmaster, and custom graphics—with up to 28 high-res graphics per page!

And these are just some of the things that the **Graphics Label Wisard** can do! So the next time your custom labels need a special touch, just summon up a little magic—from the Wizard.

ONLY \$24.95

THE MSD DUAL CANNON

MSD owners aren't left out in the cold anymore! The all new MSD DUAL CANNON gives you state of the art control over your advanced equipment! You get:

• A NIBBLER—for backing up your protected programs! • A FILE COPIER—for easy file maintenance and manipulation! • A SECTOR EDITOR—developed just for the MSD dual drive! • FAST COPIER—that WON'T transfer errors—perfect for use with data disk or Kracker Jax parameters! • AUTO MODE—drive can copy without computer connected! • SPECIAL BONUS—you get 32 free Kracker Jax parameters!

Start getting the full performance that your MSD drives are capable of delivering. You already know you own the finest drives available—so why settle for anything less than the best utilities made for them?

Get the most out of your special equipment—only \$34.95!

SUPER CAT

If you had the time and skill to create your own custom disk catalog system, the paramount system of your wildest dreams, it probably STILL wouldn't have all the features of SUPER CAT For example: • Catalog up to 640 disk directories—1280 with 2 drives! • Index & alphabetize over 5000 titles—10000 with 2 drives! • Unique ID's are NOT necessary!/A printer is NOT required! • Find ANY title in 10 seconds—sort 1000 titles in 8 seconds! • Automatic entry with Selection, Edit, and Cross Ref. options!

SUPER CAT has literally too many features to fit in here. From the easy, menu driven work screens to the comprehensive output options, SUPER CAT is the most powerful and complete disk catalog system available today!

The ultimate software library index system—only \$24.99

BASIC PROGRAMMERS—CONTACT US ABOUT "ON-LINE HELP!"

COMPUTER MART

Need more into? Call or write for our free catalog

Program submissions wanted! Good Commissions-National Marketing

CHECKS, MONEY ORDERS OR VISA/MASTERCARD


Mail your order to: Computer Mart, Dept. I 2700 NE Andresen Road/Vancouver, WA 98661 Phone orders welcome: 206-695-1393 Same day shipping/No C.O.D. orders outside U.S.



PLEASE NOTE: Free shipping & handling on all orders • C.O.D. add \$3.00 to total order • All orders must be paid in U.S. funds.

DEALERS—WE HAVE THE SUPPORT YOU'RE LOOKING FOR!

HEY'VE DONE IT AGAIN



The programmers who created Snapshot 64, the hottest "memory capture" utility on the market, have done it again! Introducing SUPER SNAPSHOT, the ultimate cartridge for the C64/C128.

SUPER SNAPSHOT combines several different functions into one revolutionary new cartridge. First and foremost, SUPER SNAPSHOT is a stateof-the-art memory capture device. This means that you can load a program into your computer's RAM and, at the touch of a button, capture an exact image of your computer's memory. That image can then be saved to disk, allowing you to make working, UNPROTECTED backups of your software!

And that's just the beginning—here're some of the highlights of this incredible cartridge:

- SUPER SNAPSHOT works on the C64 or the C128 in the 64 mode!
- Will copy 99.9% of all memory resident software on the market today!
- SUPER SNAPSHOT files will run without the cartridge being plugged
- No experience required thanks to our window driven user menus!
- Allows you to combine several different programs onto a single disk!
- 24K on board—easily expandable to 40K with plug in EPROM's!
- Our TurboDOS is the most compatible fast loader we've ever tested!
- The special built in DOS wedge commands will support devices 8, 9, 10 and 11.
- Our ROM-based machine language monitor will NOT corrupt memory!
- Unique RESUME feature lets you flip in and out of running programs!
- Hi-res screen dump works with 1525, 1526, & compatibles like Epson & Gemini!
- SUPER SNAPSHOT also works with all aftermarket disk drives tested to date, such as the MSD, FSD, Enhancer, and more.

 Special Bonus: 40 FREE customed designed Kracker Jax parameters complete with fast copier. Why buy a separate cartridge for each major function? A fast loader cartridge. A machine language monitor. A screen dump. DOS wedge commands. A memory capture utility. What would it cost for four or five cartridges, not to mention an expansion board to hold them all? Thanks to SUPER SNAPSHOT, you'll never have to find out! SPECIAL OFFER FOR SNAP-SHOT 64 OWNERS: Send us your working Snapshot 64 cartridge (with the original owner's manual AND the function key overlay card) in good, working condition with your order for a \$10.00 discount off the price of the new SUPER SNAPSHOT! This offer applies only to direct orders.

SUPER SNAPSHOT 64/ONLY \$49.95

COMPUTER MART

Need more info? Call or write for our free catalog

DEALERS—Don't miss out

CHECKS. MONEY ORDERS OR VISA/MASTERCARD.

Mail your order to: Computer Mart 2700 NE Andresen Road/Vancouver, WA 98661 Phone orders welcome: 206-695-1393 Same day shipping



PLEASE NOTE: Free shipping & handling on all orders. • COD orders must add \$3.00 to total order. WA residents must add 7.3% sales tax Sorry, no COD orders accepted from outside the U.S. • All orders must be paid in U.S. funds. • Overseas orders please add \$5.00 per unit. Canadians may order from: Marshview Software, P.O. Box 1212, Sackville, N.B. E0A 3C0

Reader Service No. 187

SPRITESHELL 128

Continued from page 50

GRAPHICO, the text screen. Merely setting aside memory for the GRAPHICS area will not direct the commands to the screen.

The demo program SHELL DEMO loads in the interrupt object code and a small sprite file in order to demonstrate the proper method to initialize the interrupt. Two players wander around inside a cave filled with flapping bats. Both the bats and the players cannot move beyond the borders until you change them. You can imagine how easy it would be to add a few dollar signs to the cave, and a collision check between the bats and players - and you would have a simple game where two players could race against the clock to gather gold inside the cave.

You should be able to come up with a nearly limitless supply of ideas for games now that you have the means to control sprites efficiently. Since the interrupt saves a lot of time that would normally be wasted in added BASIC processing, your main loop will basically only need to change sprite directions and check for collisions, keep track of score, or monitor game logic. If you are creative and resourceful, your C-128 should now begin producing that harvest of arcade-quality games promised in Commodore's sales literature, with the convenience of programming in simple, easily debugged Commodore BASIC.

A few mind-stimulators to get you started...

"Space Invaders" with sprites moving in preset patterns back and forth while you fire at them using sprite two as a missile.

Two-player tank games where you move around inside a compound firing missiles at one another. The missiles could be shimmering fireballs!

Adventure games where you slide around inside a castle avoiding flailing creatures and collecting treasures, all the while flinging daggers at your enemies.

This program comprises three files: Spriteshell 128, DEMO.SPRITES, and SHELL DEMO.

The program SHELL DEMO is a BASIC listing you can enter in 128 mode, but the other two files are in machine language. They will have to be entered in 64 mode.

Spriteshell 128 is the object code for the actual machine language interrupt. After you've goofed around with the demo, you will be able to use this file independently in your own programs by BLOADing it in at the beginning of your BASIC listing. Make sure you understand how it works before doing this. Study the simple demo to get a feel for it.

DEMO.SPRITES is merely a small file of three sprite shapes that are used by the demonstration program.


Flankspeed (see page 79) is used to enter two programs in 64 mode. Type "POKE44,64:POKE16384,0:NEW" before loading in Flankspeed in order to set BASIC memory above the area where you will be entering the two Flankspeed listings. Save at least two copies of each when you are finished, then go back to 128 mode to BLOAD these object files back into memory. Remember, you will only use Flankspeed to enter the 128 object code! Spriteshell 128 will crash in 64 mode if you SYS to the starting location of the interrupt. The game utility is only intended for use with sprites on the C-128's operating system.

SEE PROGRAM LISTINGS ON PAGE 80

PROGRAMMING CHALLENGES

By Dale Rupert

2 REM



Commodares, c/o Ahoy! P.O. Box 723 Bethel, CT 06801

We will print and discuss the cleverest, simplest, shortest, most interesting and/or most unusual solutions. Be sure to identify the *name* and *number* of the problems you are solving. Put *your* name and address on the listings as well. Show sample runs if possible. Briefly describe your solutions and tell what makes them unique or interesting, if they are. You must enclose a stamped, self-addressed envelope if you want any of your materials returned. Solutions received by the middle of the month shown on the magazine cover are most likely to be discussed, but you may send solutions and comments any time. Your original programming problems, suggestions, and ideas are equally welcome. The best ones will become *Commodares!*

PROBLEM #45-1: IDEAL INPUT

This problem was suggested by Bret Ekstrand (Signal Hill, CA). Write a subroutine which allows the user to input commas, quotation marks, and colons as well as text without the "Extra Ignored" error or any other problems. Bret mentioned that you can stuff a quotation mark into the keyboard buffer, but unfortunately it would be displayed on the screen and that is undesirable. It may also mess up actual quotation marks entered by the user.

Your subroutine should take exactly what the user types and store it in the variable U\$. Oh yeah, the INST/DEL key must work properly, too. Let's see solutions for the C-64 and for the C-128.

PROBLEM #45-2: FADE AWAY

John Yergaw (London, ONT) sent a long list of programs he would like to see. I'm afraid that "a rotating earth with continents on it spinning in a circle" is somewhat out of *Commodares*' league. But here's an interesting one you should enjoy. Make a word fade away. That's it. Display a word on the screen then make it fade away. How? That part is up to you.

PROBLEM #45-3: SUPER BOWL

Oren Dalton (El Paso, TX) suggested this challenge. Write

a program to calculate the minimum and maximum bowling scores that can result from exactly five strikes and five spares. To simplify things, assume the player knocked down only five pins after the tenth frame. Show all solutions. Oren's program shows the ten frames in this form: $X \times X / / / / X \times X$ where $X \times X / / / / X \times X$ where $X \times X \times X \times X \times X \times X$

PROBLEM #45-4: FAST FACTORIAL

Use an assembler/monitor for the C-64 or the C-128 monitor to solve this one from Thomson Fung (San Diego, CA). Write assembly code to compute 5! (5 factorial) exactly, leaving the result in the X Register. Thomson's solution is 36 bytes long. Commented listings are essential if your solution is to be considered. By the way, 5! is 5 * 4 * 3 * 2 * 1. Your routine should perform the integer multiplications.

Before we begin our discussion of solutions to *Commodares* from the May issue of *Ahoy!*, here are two short sort routines send by Scott Duncan (Superior, NE) for the C-128:

COMMODARES PROBLEM #40-2:

3 REM	SHORT SORT
4 REM	SOLUTION BY
5 REM	SCOTT DUNCAN
6 REM =	
10 N=8	:REM # OF ITEMS TO SORT
20 REM	SELECT RANDOM NUMBERS TO BE SORTE
D	
	I=1 TO N : $J(I)=INT(RND(1)*1000-3$
	<pre>1)=J(I):PRINT J(I);:NEXT:PRINT</pre>
	INSERTION SORT
	I=2 TO N:T=J(I):K=I:DO WHILE J(K-
1)>T:J((K)=J(K-1):K=K-1:LOOP UNTIL $K=1:J($

K)=T:NEXT
60 FOR I2=1 TO N:PRINT J(I2);:NEXT:PRINT
"INSERTION SORT"

70 REM -- SHELLSORT --

80 REM (REPLACE 1 AND 2 IN INSERTION SOR T WITH H AND H+1)

90 H=2^INT(LOG(N)/LOG(2))-1:DO:FORI=H+1T ON:T=S(I):K=I:DO WHILE S(K-H)>T:S(K)=S(K-H):K=K-H:LOOP UNTIL K<=H:S(K)=T:NEXT:H=INT(H/2):LOOP UNTIL H=0

100 FOR I2=1 TO N:PRINT S(I2);:NEXT:PRIN T"SHELLSORT"

Scott clearly took advantage of the sophisticated loop con-

trol structures available in BASIC 7.0. In particular, the use of different conditional tests for the WHILE and the UNTIL statements is a very powerful feature.

Scott adapted sort routines described in *Algorithms* by Robert Sedgewick (Addison-Wesley, 1983). That book explains the workings of these sort routines and many others. You might enjoy comparing the times of these two routines. You specify the number of items to be sorted with the value of N in line 10. For values of N greater than 10, you must add a dimension statement such as

15 DIM J(N), S(N)

Now on to *Problem #41-1: Real Thing* submitted by J.H. Smalley (Boulder, CO). The problem was to write a short program to display the *exact* value of $2 \uparrow 127 - 1$, which is the largest floating point number the Commodore computers can use.

I must learn to be more careful in my wording of the problems. A few readers sent this one-liner which does fulfill the requirement, if not the intent, of the problem:

1 PRINT "170,141,183,460,469,231,731,687,303,715,884,105,727"

Admittedly there was no mention of the number base in which the result was to be printed, so this solution suggested by Daniel Souza (N. Dartmouth, MA) also fills the bill:

10 FOR X=1 TO 127 : A\$=A\$+"1" : NEXT 20 PRINT "IN BASE 2, 2^127-1 IS "; A\$

Yes, in the binary number system, the answer is a string of 127 l's.

But now on to the intended solutions. The shortest solution came from Clifford Dedmore Jr. (Coos Bay, OR).

His program stores the result in five 8-digit elements of the N() array. Each element is repeatedly multiplied by two, 127 times. Each element can become as large as 1E8. The Commodore performs exact mathematical operations on numbers as large as 1E8. When an element becomes larger than that, it is reduced by multiples of 1E8, and the excess is carried in C% to the next larger array element.

To watch this program operate, you may modify line 20 to print intermediate results. Replace the NEXTJ,K statement with these statements:

NEXT J : FOR L=5 TO 1 STEP -1 : PRINT

N(L); : NEXT L : PRINT : NEXT K

Commodore 64 users must break line 20 into two lines with this modification.

You can use this program to calculate other powers of two. Change the 127 in line 10 to the desired power. For larger results, you may need to use more elements of the N() array. Change the 5's as necessary. Remember that N(1)=N(1)-1 in line 20 subtracts one from the result before printing the answer. Remove it if desired. For powers of numbers other than two, change the 2 in line 10.

Problem #41-2: New Name from Lon Olson (Mesa, AZ) was a good exercise in string permutations. The computer is to generate all possible 5-letter names for a new company according to these rules:

- 1) The first letter is the initial of your first name.
- 2) The fifth letter is the initial of your last name.
- 3) Of the three middle letters, at least one is a vowel (a, e, i, o, or u).
- 4) All five letters must be different (except the first and fifth may be the same).

This program from Jim Speers (Niles, MI) is the most compact of the solutions meeting all the requirements above:

```
COMMODARES PROBLEM #41-2:
2 REM
          NEW NAME
3 REM
       SOLUTION BY
4 REM
5 REM
          JIM SPEERS
200 X$="AEIOUBCDFGHKLMNPQRTVWXYZ":F$="J"
:L$="S":NV=5:NL=24
210 FORV=1TONV:FORA=1TONL-1:IFA=VTHEN260
220 FORB=A+1TONL: IFB=VTHEN250
230 A=MID(X,A,1):B=MID(X,B,1):V=M
ID$(X$,V,1)
240 PRINT F$V$A$B$L$" "F$V$B$A$L$" "F$A$
B$V$L$" "F$A$V$B$L$" "F$B$V$A$L$" "F$B$A
$V$L$:N=N+6
250 NEXTB
260 NEXTA
270 NEXTV
280 PRINTN; "NAMES PRINTED"
```

You should change the value of X\$, F\$, and L\$ as appropriate for your initials. Jim and several others also sent routines which allow the user to enter his initials. You may enjoy modifying this program to do that.

Among the more interesting names mentioned by readers were NMALS or NPETS (pet store), NRIBS (barbeque restaurant), and NEWTS (lizard farm) from Neil Spokes (Briarcliff Manor, NY); Mario Segal (Mexico City, Mexico) came up with MEATS for a steakhouse and MALES for a men's club; Jim Speers can be himself (JAMES), someone else (JONES), or "just another fat man" (JOWLS); Jim is also considering JADES, JEANS, or JOKES for his next business. Mike Suetkamp (Marion, IN) will open up a classy place; he will call it MIKES.

Necah Buyukdura (Ankara, Turkey) sent a good solution as well as some statistics. He said that the number of New Names that can be generated is:

4554 when the first and last initials are two different vowels;

6072 when only one initial is a vowel;

6624 when both initials are the same vowel;

7590 when the two initials are different consonants;

8280 when both initials are the same consonant.

You statisticians may enjoy verifying these numbers.

Problem #41-3: Word Slider is an enjoyable animation challenge from Scott McClare (Espanola, ONT). The idea is to slide two words through each other on one line of the screen, one coming from the right and the other from the left. The word from the right has priority and is visible when the two overlap.

Among the short but sophisticated solutions is this one from Bob Renaud (Pittsfield, MA).

1 REM ==========	
2 REM COMMODARES PROBLE	EM #41-3 :
3 REM WORD SLIDER	
4 REM SOLUTION BY	
5 REM BOB RENAUD	
6 REM ===== FOR C-128 ON	NLY ======
10 AT=65520:WINDOWO, 12, 39,	
34:SYSAT,,O,J:PRINT"STRING	G":SYSAT,,0,34-
J:PRINT"SLIDER":SLEEP1:PR	INT:NEXT:LOOP

It is for the C-128 only. According to Bob, the program uses the JPLOT Kernal routine. It uses the WINDOW function to center the printout and avoids leftover letters by scrolling the previous line out of the window. The DO loop runs continuously until you press RUN STOP.

To restore the screen to full size, press the HOME key twice. ReLIST the program before making changes to it, since the line links for text on the screen were lost when the new window was created. You may adjust the speed of motion with the value in the SLEEP statement, or replace SLEEP with a FOR/NEXT loop for finer control. (SLEEP doesn't handle fractions of a second properly.)

A more straightforward approach is shown in the following program submitted independently by Robert Marcus (Agincourt, ONT), J.V. Henry (North Fork, CA), and by Casey Gorsuch (Wilson Creek, WA).

1	REM				==
2	REM	COMMODARES PROBLEM	#41-3	:	
3	REM	WORD SLIDER			
4	REM	SOLUTION BY			
5	REM	CASEY GORSUCH			
6	REM	ROBERT MARCUS			
7	REM	J.V. HENRY			
-	REM				==
10	FOI	RI=OTO37:PRINT"+"TAB(I)	"CATS"	'TAB(37

-I)"DOG":FORX=OTO4O:NEXT:NEXT

Change the value 40 to adjust the speed at which the words move.

Many readers successfully handled the difficulties of using two words of different lengths. Instead of using TABs to position the words each time, some readers repeatedly constructed mostly-blank strings 40 characters long with the positions of the moving words within the strings continuously updated. Other readers simply POKEd the word characters directly to the correct screen locations.

Still others positioned the cursor with POKEs before printing each word. On the C-64, these statements move the cursor to horizontal position X on screen line Y then print A\$:

```
POKE 214,Y: PRINT: POKE 211,X: PRINT A$
```

On the C-128, the statement CHAR,X,Y,A\$ does the same thing. Thanks to Judy Groth (Brooklyn, NY), Edward Shaw (Lexington, KY), Danny Potts (Birmingham, AL), and Skot Hannon for describing the POKEs for the C-64.

The following solution from Dominique Vachon shows how the problem can be solved in Pascal.

Merlin 128

Easy to use for the beginner or professional, Merlin 128 is the complete macro assembler system designed specifically for the Commodore 128.

Just a few of its features include:

- Full Screen Editor for quick and easy 80 column editing.
- Macro Libraries for frequently used subroutines.
- Sourceror to disassemble binary programs into source files.
- Relocating Linker to generate relocatable object code.
- Local and Global Label support.
- Entry and External Label definitions.
- Printfiler to save assembled listings as ASCII Text files.
- Altkeys to create your own keyboard command macros.
- Keydefs to define and edit the Function Key definitions.

Merlin 128 comes with many **Sample Programs** you can list and modify yourself, including 1571 Disk Copy, 1571 Disk Zap, HiRes, Swish, RAM Test and more!

\$69.95* *Plus \$3.00 Shipping. CA Res. add 6% Sales Tax.

See why Merlin 128 is the best macro assembler for the Commodore 128. Ask your local dealer or order today by calling our Toll Free Order Line:

800-421-6526 or 619-442-0522 in CA

Roger Wagner Magner

1050 Pioneer Way • Suite P • El Cajon, CA 92020

Merlin 128 requires a Commodore 128 and at least one 1571 drive or equivalent. Merlin 128 is compatible with Merlin 64 source files.

```
13 : VAR A,D : INTEGER:
14 : BEGIN
      FOR D := 0 TO 37 DO
15:
       BEGIN
16:
        CLEARSCREEN:
17:
        POSCURSOR(0,D); WRITELN (SECOND);
18:
        POSCURSOR(0,37-D); WRITELN(FIRST)
19:
        FOR A := 1 TO 20 DO
20:
21:
         BEGIN END;
22:
       END;
23 : END.
```

The line numbers and leading colons are not needed. The POSCURSOR command is similar to the CHAR command described above.

The toughest challenge this month was *Problem #41-4: Smith Numbers* by Sol Katz (Lakewood, CO). A Smith number is an integer with the sum of its digits equal to the sum of the digits of its prime factors (whew!). The problem was to find and print Smith numbers.

To solve the problem, you must find the prime factors of a number, the sum of the digits of the number, and the sum of the digits of the prime factors. Each positive integer has a unique set of prime number factors. Multiplying the factors together gives the number.

This solution from Barry Warren (Coboconk, ONT) efficiently solves the problem.

```
COMMODARES PROBLEM #41-4:
2 REM
          SMITH NUMBERS
3 REM
       SOLUTION BY
4 REM
          BARRY WARREN
5 REM
10 DIM X(29):Z=4
20 P=Z:I=1:Y=1:PRINT Z,
30 Y=Y+1:IF Y*Y>P THEN X(I)=P:GOTO 60
40 Q=P/Y:IF INT(Q)<Q GOTO 30
50 P=Q:X(I)=Y:I=I+1:Y=Y-1:GOTO 30
60 ON I GOTO 110:S=0:FOR J=1 TO I:X=X(J)
:PRINT X;:GOSUB 90:NEXT:SX=S
70 S=0:X=Z:GOSUB 90:IF S=SX THEN PRINT :
PRINT Z "IS A SMITH NUMBER";
80 Z=Z+1:PRINT:GOTO 20
90 Y=INT(X/10):S=S+INT((X/10-Y+.05)*10):
X=Y: IF X>0 GOTO 90
100 RETURN
110 Z=Z+1:PRINT "PRIME":GOTO 20
```

Z stores the number to be tested. The prime factors of Z are stored in the X() array. Lines 30 through 50 calculate the prime factors of Z. Line 40 repeatedly divides P (initially set to Z) by every integer divisor Y. If Y does not divide evenly into P, the program branches back to line 30 for the next divisor.

Once an exact divisor is found, P is replaced by the quotient, and the divisor (which is a prime factor) is stored in X() in line 50. The Y=Y-1 statement causes each Y value to be reused as many times as possible.

After the value of P is less than the square of the next divisor, all prime factors of Z have been found, and line 30 branches to line 60. The variable I keeps track of the number of factors found. If I is still 1 in line 60, then the number Z must be prime, and the program branches to line 110 to print that fact. If I is greater than 1, then line 60 prints each prime factor. I added the PRINT statements to Barry's program in lines 60 and 110 to show intermediate results.

Lines 60 and 70 call the subroutine at line 90 to add up the digits of the prime factors and of the original number in SX and S respectively. If the two digit sums are equal, the final statement in line 70 prints the Smith numbers. Line 80 increments the test number Z, and the process is repeated.

You may set Z to whatever starting value you desire in line 10. To look for Smith numbers larger than one million, simply use Z=1000000 in line 10, or press RUN STOP to stop the program and enter

Z=1E6 : GOTO 20

Congratulations to Necah Buyukdura (Ankara, Turkey), Bret Ekstrand (Signal Hill, CA), Gary Bond (Topeka, KS), and Jim Speers (Niles, MI) for good solutions to this masters-level challenge. Leo Brenneman (Erie, PA) disqualified himself from this problem since he personally knew Smith. Leo wondered how I got Smith's unlisted phone number. (Sorry, but I am not allowed to divulge that information.) By the way, I wonder what the largest Smith number and prime number are that this program is capable of finding. Anyone know?

Keep those suggestions and solutions coming. If you find the problems too easy, send harder ones. If these problems are always over your head, send easy ones. We aim to please (or at least to entice) everyone. See you next month.

Congratulations to the following people not already mentioned this month for sending valid *Commodares* solutions. Please be sure to include your address with your listing. The envelopes (and some return addresses) are discarded.

Carmen Artino (Guilderland, NY)
Ernest Barkman (Orlando, FL)
Steven Blucher (Baltimore, MD)
Billy Brown Jr.
Dave Budgett (Graceville, MN)
Michael Cole
Curt Donofrio (Shelton, CT)
B. Donovan (Quebec City, QUE)
Craig Ewert (Crystal Lake, IL)
Jim Fidelholtz (Puebla, MEX)
R.E. Frazier (San Diego, CA)
Thomson Fung (San Diego, CA)
Ron Gow (Sacramento, CA)
Robert Groysman

Alan Gutierrez
David Hoffner (Brooklyn, NY)
Shaun Jones (Thackerville, OK)
Anibal Lopez (Rio Piedras, PR)
Jeff McCreary
Edward Nichols (Lawton, OK)
Dave Nowka
Lon Olson (Mesa, AZ)
Edward Shaw (Lexington, KY)
David Shiloh (Eugene, OR)
J.H. Smalley (Boulder, CO)
Mark Stevens
John Yarbrough (Glen Rock, PA)
Perry Yates (Galveston, TX)

PROGRAMS NEEDED

...and paid for—at the highest rates offered by any Commodore-specific publication. We need the best utility, game, and productivity programs being written today. If you have a program that falls into that category, send it on disk with a printout, documentation, and SASE to *Ahoy!* Program Submissions, Ion International Inc., 45 West 34th Street—Suite 500, New York, NY 10001.

DROGRAM LISTINGS

Attention new Ahoy! readers! You must read the following information very carefully prior to typing in programs listed in Ahoy! Certain Commodore characters, commands, and strings of characters and commands will appear in a special format. Follow the instructions and listings guide on this page.

n the following pages you'll find several programs that you can enter on your Commodore computer. But before doing so, read this entire page carefully.

To insure clear reproductions, Ahoy!'s program listings are generated on a daisy wheel printer, incapable of printing the commands and graphic characters used in Commodore programs. These are therefore represented by various codes enclosed in brackets []. For example: the SHIFT CLR/HOME command is represented onscreen by a heart

The code we use in our listings is [CLEAR]. The chart below lists all such codes which you'll encounter in our listings, except for one other special case.

The other special case is the COMMODORE and SHIFT characters. On the front of most keys are two symbols. The symbol on the left is obtained by pressing that key while holding down the COMMODORE key; the symbol on the right, by pressing that key while holding down the SHIFT key. COMMODORE and SHIFT characters are represented in our listings by a lower-case "s" or "c" followed by the symbol of the key you must hit. COMMODORE J, for example, is represented by [c J], and SHIFT J by [s J].

Additionally, any character that occurs more than two times in a row will be displayed by a coded listing. For example, [3 "[LEFT]"] would be 3 CuRSoR left commands in a row, [5 "[s EP]"] would be 5 SHIFTed English Pounds, and so on. Multiple blank spaces will be noted in similar fashion: e.g., 22 spaces as [22 "].

Sometimes you'll find a program line that's too long for the computer to accept (C-64 lines are a maximum of 80 characters, or 2 screen lines long; C-128 lines, a maximum of 160 characters, 2 or 4 screen lines in 40 or 80 columns respectively). To enter these lines, refer to the *BASIC Command Abbreviations Appendix* in your User Manual.

On the next page you'll find our *Bug Repellent* programs for the C-128 and C-64. The version for your machine will help you proofread programs after typing them. (Please note: the *Bug Repellent* line codes that follow each program line, in the whited-out area, should *not* be typed in. See instructions preceding each program.)

On the second page following you will find *Flankspeed*, our ML entry program, and instructions on its use.

Call Ahoy! at 212-239-6089 with any problems (if busy or no answer after three rings, call 212-239-0855).

WHEN YOU SEE	IT MEANS	YOU TY	PE V	YOU VILL SEE	WHEN YOU SEE	IT MEANS	YOU TYPE	YOU WILL SEE
[CLEAR]	Screen Clear	SHIFT	CLR/HOM	IE 💟	[BLACK]	Black	CNTRL 1	
[HOME]	Home		CLR/HOM	E S	[WHITE]	White	CNTRL 2	3
[UP]	Cursor Up	SHIFT	† CRSR ↓		[RED]	Red	CNTRL 3	£
[DOWN]	Cursor Down		† CRSR +		[CYAN]	Cyan	CNTRL 4	
[LEFT]	Cursor Left	SHIFT	- CRSR -	- 11	[PURPLE]	Purple	CNTRL 5	
[RIGHT]	Cursor Right		- CRSR -	-	[GREEN]	Green	CNTRL 6	0
[SS]	Shifted Space	SHIFT	Space		[BLUE]	Blue	CNTRL 7	
[INSERT]	Insert	SHIFT	INST/DEL		[YELLOW]	Yellow	CNTRL 8	T
[DEL]	Delete		INST/DEL	Ū	[F1]	Function 1	FI	
[RVSON]	Reverse On	CNTRL	9	R	[F2]	Function 2	SHIFT FI	-
[RVSOFF]	Reverse Off	CNTRL	0		[F3]	Function 3	F3	
[UPARROW]	Up Arrow		+	1	[F4]	Function 4	SHIFT F3	2
[BACKARROW]	Back Arrow		+	-	[F5]	Function 5	F5	
[PI]	PI		π	П	[F6]	Function 6	SHIFT F5	2
[EP]	English Pound		£	£	[F7]	Function 7	F7	
					[F8]	Function 8	SHIFT F7	

BUG REPELLENT FOR THE 64 & 128 By BUCK CHILDRESS

Please note: the Bug Repellent programs listed here are for Ahoy! programs published from the May 1987 issue onward! For older programs, use the older version.

Type in, save, and run Bug Repellent. You'll be asked if you want automatic saves to take place. If so, you're prompted for the device, DISK (D) or TAPE (T). You then pick a starting file number, 0 through 99. Next, you enter a name, up to 14 characters long. At this point, Bug Repellent verifies your entries and gives you a chance to change them if you want. If no changes are needed, Bug Repellent activates itself. (Pressing RETURN without answering the prompts defaults to disk drive and begins your files with "00BACKUP".)

Type NEW and begin entering an Ahoy! program. As you enter program lines and press RETURN, a Bug Repellent code appears at the top of your screen. If it doesn't match the code in the program listing, an error exists. Correct the line and the codes will match.

If used, automatic saves take place every 15 minutes. When the RETURN key is pressed on a program line, the screen changes color to let you know that a save will begin in about three seconds. You may cancel the save by pressing the RUN STOP key. The file number increments after each save. It resets to 00 if 99 is surpassed. After saving, or cancelling, the screen returns to its original color and the timer resets for 15 minutes.

When you've finished using Bug Repellent, deactivate it by typing SYS 49152 [RETURN] for the Commodore 64 or SYS 4864 [RE-TURN] for the Commodore 128.

C-64 BUG REPELLENT

- ·10 PRINTCHR\$(147)"LOADING AND CHECKING THE DATA[3"."]":J =49152
- ·20 FORB=0T011:READA:IFA<00RA>255THEN40
- ·30 POKEJ+B, A: X=X+A: NEXTB: READA: IFA=XTHEN50
- ·40 PRINT:PRINT"ERROR IN DATA LINE: "PEEK(64)*256+PEEK(63)
- •50 X=0:J=J+12:IFJ<49456THEN20
- .60 POKE198,0:POKE49456,0:A\$="Y":B\$=A\$:C\$="D":D\$="DISK":D =8:PRINTCHR\$(147)
- •70 INPUT"DO YOU WANT AUTOMATIC SAVES (Y/N)"; A\$:PRINT:IFA \$="Y"THEN90
- *80 PRINT"NO AUTOMATIC SAVES[3"."]":GOTO150
- -90 POKE49456,1:INPUT"DISK OR TAPE (D/T)";C\$:IFC\$<>"D"THE ND=1:D\$="TAPE"
- *100 POKE49457, D:D\$=D\$+" DRIVE":PRINT:INPUT"FILE NUMBER (
- *110 N\$=RIGHT\$(STR\$(N),2):IFN<10THENN\$=CHR\$(48)+CHR\$(N+48
- ·120 F\$="BACKUP":PRINT:INPUT"FILENAME";F\$:F\$=N\$+LEFT\$(F\$,
- 14):L=LEN(F\$) ·130 POKE49458, L: FORJ=1TOL: POKE49458+J, ASC(MID\$(F\$, J, 1)):
- NEXTJ:PRINT *140 PRINT"SAVING DEVICE ** "D\$:PRINT"STARTING WITH ** "F
- ·150 PRINT:INPUT"IS THIS CORRECT (Y/N)"; B\$:IFB\$<>"Y"THEN6
- ·160 POKE770, 131: POKE771, 164: SYS49152: END
- •170 DATA169,79,32,210,255,162,38,160,192,204,3,3,1507
- *180 DATA208,10,162,131,160,164,169,70,32,210,255,44,1615 *190 DATA169,78,32,210,255,142,2,3,140,3,3,76,1113
- ·200 DATA36,193,32,96,165,134,122,132,123,32,115,0,1180
- ·210 DATA170,240,243,162,255,134,58,144,3,76,150,164,1799
- ·220 DATA32,107,169,32,121,165,173,0,2,240,5,169,1215 ·230 DATA79,141,2,3,76,162,164,169,0,133,2,133,1064
- -240 DATA251,133,252,133,254,24,101,20,69,254,230,254,197
- -250 DATA24,101,21,69,254,170,230,254,164,252,185,0,1724
- ·260 DATA2,133,253,201,34,208,6,165,2,73,255,133,1465 ·270 DATA2,201,32,208,4,165,2,240,8,138,24,101,1125
- ·280 DATA253,69,254,170,44,198,254,230,252,164,253,208,23
- -290 DATA213,138,41,240,74,74,74,74,24,105,129,141,1327 -300 DATA44,193,138,41,15,24,105,129,141,45,193,162,1230

- ·310 DATAO, 189, 43, 193, 240, 12, 157, 0, 4, 173, 134, 2, 1147
- ·320 DATA157,0,216,232,208,239,169,38,141,2,3,173,1578
- ·330 DATA48,193,240,23,165,161,201,212,176,4,165,160,1748
- ·340 DATA240,13,238,32,208,160,0,32,225,255,208,6,1617
- ·350 DATA32, 33, 193, 76, 38, 192, 232, 208, 242, 200, 208, 239, 1893
- ·360 DATA32,68,229,169,0,168,174,49,193,32,186,255,1555
- ·370 DATA173,50,193,162,51,160,193,32,189,255,169,43,1670 ·380 DATA166,45,164,46,32,216,255,162,1,189,51,193,1520
- ·390 DATA168, 200, 152, 201, 58, 144, 2, 169, 48, 157, 51, 193, 1543 ·400 DATA201,48,208,3,202,16,234,32,33,193,76,116,1362
- •410 DATA164, 206, 32, 208, 169, 0, 170, 168, 76, 219, 255, 160, 1827
- -420 DATA1,1,160,0,0,65,72,79,89,33,0,0,500

C-128 BUG REPELLENT

•11 11

13

•13 KF

.13

.14

.14

.15

.15

.16

.16

.17

.17

.18

.18

-19

.19

. 21

. 20

.21

. 22

.22

.23

. 23

.24 . 24

. 25

. 26

. 26

.27

. 28

. 28

. 20 . 20

.30

-30

•31

• 31

.32

.32

• 33

.33

.34

.34 • 35

.35

•36

• 36 .37

•38

•38

- ·10 PRINTCHR\$(147)"LOADING AND CHECKING THE DATA[3"."]":J =4864
- · 20 FORB=0T011:READA:IFA<00RA>255THEN40
- · 30 POKEJ+B, A: X=X+A: NEXTB: READA: IFA=XTHEN50
- ·40 PRINT:PRINT"ERROR IN DATA LINE: "PEEK(66)*256+PEEK(65) : END
- •50 X=0:J=J+12:IFJ<5213THEN20
- .60 POKE208.0:POKE5213.0:A\$="Y":B\$=A\$:C\$="D":D\$="DISK":D= 8: PRINTCHR\$(147)
- ·70 INPUT"DO YOU WANT AUTOMATIC SAVES (Y/N)"; A\$:PRINT:IFA \$="Y"THEN90
- ·80 PRINT"NO AUTOMATIC SAVES[3"."]":GOTO150
- ·90 POKE5213,1:INPUT"DISK OR TAPE (D/T)";C\$:IFC\$<>"D"THEN D=1:D\$="TAPE"
- ·100 POKE5214, D:D\$=D\$+" DRIVE":PRINT:INPUT"FILE NUMBER (0
- ·110 N\$=RIGHT\$(STR\$(N),2):IFN<10THENN\$=CHR\$(48)+CHR\$(N+48
- ·120 F\$="BACKUP":PRINT:INPUT"FILENAME";F\$:F\$=N\$+LEFT\$(F\$, 14):L=LEN(F\$)
- ·130 POKE5215, L:FORJ=1TOL:POKE5215+J, ASC(MID\$(F\$,J,1)):NE XTJ:PRINT
- ·140 PRINT"SAVING DEVICE ** "D\$:PRINT"STARTING WITH ** "F
- ·150 PRINT: INPUT"IS THIS CORRECT (Y/N)"; B\$:IFB\$<>"Y"THEN6
- ·160 POKE770, 198: POKE771, 77: SYS4864: END
- ·170 DATA32,58,20,169,41,162,19,236,3,3,208,4,955
- ·180 DATA169,198,162,77,141,2,3,142,3,3,224,19,1143 ·190 DATA208,7,32,125,255,79,78,0,96,32,125,255,1292
- ·200 DATA79,70,70,0,96,162,0,134,251,189,0,2,1053
- -210 DATA240,19,201,48,144,9,201,58,176,5,133,251,1485 -220 DATA232,208,238,134,252,165,251,208,3,76,198,77,2042
- -230 DATA169,0,166,235,164,236,133,253,133,254,142,47,193
- -240 DATA20,140,48,20,24,101,22,69,254,230,254,24,1206
- -250 DATA101,23,69,254,170,230,254,164,252,185,0,2,1704
- ·260 DATA133,251,201,34,208,6,165,253,73,255,133,253,1965
- -270 DATA201,32,208,4,165,253,240,8,138,24,101,251,1625 -280 DATA69,254,170,44,198,254,230,252,164,251,208,213,23
- ·290 DATA138,41,240,74,74,74,74,24,105,65,141,88,1138
- -300 DATA20,138,41,15,24,105,65,141,89,20,32,79,769
- ·310 DATA20, 189, 85, 20, 240, 6, 32, 210, 255, 232, 208, 245, 1742
- *320 DATA174,47,20,172,48,20,24,32,240,255,173,93,1298
 *330 DATA20,240,27,165,161,201,212,176,4,165,160,240,1771
- -340 DATA17,32,65,20,238,32,208,238,1,214,32,225,1322
- -350 DATA255,208,6,32,49,20,76,198,77,232,208,242,1603 -360 DATA200,208,239,32,66,193,173,95,20,162,96,160,1644
- ·370 DATA20,32,189,255,169,0,170,32,104,255,169,0,1395
- ·380 DATA174,94,20,168,32,186,255,169,45,174,16,18,1351
- ·390 DATA172,17,18,32,216,255,162,1,189,96,20,168,1346
- -400 DATA200,152,201,58,144,2,169,48,157,96,20,201,1448 -410 DATA48,208,3,202,16,234,32,49,20,141,0,2,955
- -420 DATA76, 183, 77, 58, 59, 32, 65, 20, 206, 32, 208, 206, 1222
- -430 DATA1,214,169,0,170,168,76,219,255,32,79,20,1403
- ·440 DATA169, 26, 141, 0, 214, 173, 0, 214, 16, 251, 96, 162, 1462
- -450 DATAO, 142, 0, 255, 96, 19, 18, 32, 32, 32, 32, 146, 804
- ·460 DATAO, 1,0,0,65,72,79,89,33,0,0,0,339

FLANKSPEED FOR THE C-64 By GORDON F. WHEAT

Flankspeed will allow you to enter machine language Ahoy! programs without any mistakes. Once you have typed the program in, save it for future use. While entering an ML program with Flankspeed there is no need to enter spaces or hit the carriage return. This is all done automatically. If you make an error in a line a bell will ring and you will be asked to enter it again. To LOAD in a program Saved with Flankspeed use LOAD "name",1,1 for tape, or LOAD "name",8,1 for disk. The function keys may be used after the starting and ending addresses have been entered.

f1-SAVEs what you have entered so far.

f3-LOADs in a program worked on previously.

f5-To continue on a line you stopped on after LOADing in the previous saved work.

f7—Scans through the program to locate a particular line, or to find out where you stopped the last time you entered the program. It temporarily freezes the output as well.

·100 POKE53280,12:POKE53281,11	OP	5	IK
·105 PRINT"[CLEAR][c 8][RVSON][15" "]FLANKSPEED[15" "]";	FP	*390 PRINT: PRINT" ADDRESS NOT WITHIN SPECIFIED RANGE!": B=0:	
•110 PRINT"[RVSON][5" "]MISTAKEPROOF ML ENTRY PROGRAM[6" '		GOTO415	HK
·115 PRINT"[RVSON][9" "]CREATED BY G. F. WHEAT[9" "]"	JP FA	-395 PRINT:PRINT"NOT ZERO PAGE OR ROM!":B=0:GOTO415 -400 PRINT"?ERROR IN SAVE":GOTO415	DM
·120 PRINT"[RVSON][3" "]COPR. 1987, ION INTERNATIONAL INC.	1.11	·405 PRINT"?ERROR IN LOAD":GOTO415	JK IO
[3" "]"	AJ	-410 PRINT: PRINT: PRINT"END OF ML AREA": PRINT	JO
•125 FORA=54272TO54296:POKEA,O:NEXT	ND	·415 POKE54276,17:POKE54276,16:RETURN	BF
*130 POKE54272,4:POKE54273,48:POKE54277,0:POKE54278,249:POK		-420 OPEN15,8,15:INPUT#15,A,A\$:CLOSE15:PRINTA\$:RETURN	DH
KE54296,15	NP	·425 REM GET FOUR DIGIT HEX	IM
•135 FORA=680T0699: READB: POKEA, B: NEXT •140 DATA169, 251, 166, 253, 164, 254, 32, 216, 255, 96	FL	· 430 PRINT: PRINTB\$;: INPUTT\$	OL
·145 DATA169,0,166,251,164,252,32,213,255,96	EK	 435 IFLEN(T\$)<>4THENGOSUB380:GOTO430 440 FORA=1T04:A\$=MID\$(T\$,A,1):GOSUB450:IFT(A)=16THENGOSUB 	JD
·150 B\$="STARTING ADDRESS IN HEX":GOSUB430:AD=B:SR=B	KP	380:GOTO430	AK
•155 GOSUB480: IFB=OTHEN150	OE	•445 NEXT: B=(T(1)*4096)+(T(2)*256)+(T(3)*16)+T(4): RETURN	KB
•160 POKE251, T(4)+T(3)*16: POKE252, T(2)+T(1)*16	AM	·450 IFA\$>"@"ANDA\$<"G"THENT(A)=ASC(A\$)-55:RETURN	GM
·165 B\$="ENDING ADDRESS IN HEX":GOSUB430:EN=B	PE	•455 IFA\$>"/"ANDA\$<":"THENT(A)=ASC(A\$)-48:RETURN	NJ
•170 GOSUB470: IFB=07HEN150	PG	•460 T(A)=16:RETURN	IC
•175 POKE254,T(2)+T(1)*16:B=T(4)+1+T(3)*16 •180 IFB>255THENB=B-255:POKE254,PEEK(254)+1	GM HG	• 465 REM ADDRESS CHECK	OL
•185 POKE253, B: PRINT	EC	•470 IFAD>ENTHEN385 •475 IFB <srorb>ENTHEN390</srorb>	HO
•190 REM GET HEX LINE	ED	•480 IFB<2560R(B>40960ANDB<49152)ORB>53247THEN395	LE OB
•195 GOSUB495:PRINT": [c P][LEFT]";:FORA=7708	KD	•485 RETURN	HE
•200 FORB=0T01:GOT0250	IH	•490 REM ADDRESS TO HEX	PM
• 205 NEXTB	IJ	•495 AC=AD: A=4096: GOSUB520	AP
·210 A%(A)=T(1)+T(0)*16:IFAD+A-1=ENTHEN340	FA	•500 A=256:GOSUB520	NF
*215 PRINT" [c P][LEFT]"; *220 NEXTA:T=AD-(INT(AD/256)*256):PRINT" "	EG	•505 A=16:GOSUB520	LG
•225 FORA=OTO7:T=T+A%(A):IFT>255THENT=T-255	GL	•510 A=1:GOSUB520 •515 RETURN	HE
•230 NEXT	GI	•520 T=INT(AC/A):IFT>9THENA\$=CHR\$(T+55):GOTO530	JD
•235 IFAZ(8)<>TTHENGOSUB375:GOTO195	FL	•525 A\$=CHR\$(T+48)	JI
·240 FORA=GTO7:POKEAD+A,A%(A):NEXT:AD=AD+8:GOTO195	IM	•530 PRINTA\$;:AC=AC-A*T:RETURN	AA
• 245 REM GET HEX INPUT	PA	•535 A\$="**SAVE**":GOSUB585	IC
•250 GETA\$:IFA\$=""THEN250 •255 IFA\$=CHR\$(20)THEN305	GA	•540 OPEN1, T, 1, A\$:SYS680:CLOSE1	AB
•260 IFA\$=CHR\$(133)THEN535	GO LM	•545 IFST=0THENEND •550 GOSUB400:IFT=8THENGOSUB420	FB
·265 IFA\$=CHR\$(134)THEN560	IG	•555 GOTO535	PM FI
•270 IFA\$=CHR\$(135)THENPRINT" ":GOTO620	НО	•56') A\$="**LOAD**":GOSUB585	PE
•275 IFA\$=CHR\$(136)THENPRINT" ":GOTO635	HE	•565 OPEN1,T,O,A\$:SYS690:CLOSE1	PO
·280 IFA\$>"@"ANDA\$<"G"THENT(B)=ASC(A\$)-55:GOTO295	MI	•570 IFST=64THEN195	OI
•285 IFA\$>"/"ANDA\$<":"THENT(B)=ASC(A\$)-48:GOTO295	DJ	•575 GOSUB405: IFT=8THENGOSUB420	CO
·290 GOSUB415:GOT0250 ·295 PRINTA\$"[c P][LEFT]";	JA	•580 GOTO560	GN
-300 GOTO205	PK FA	-585 PRINT" ":PRINTTAB(14)A\$ -590 PRINT:A\$="":INPUT"FILENAME";A\$	KA
•305 IFA>OTHEN320	BI	•595 IFA\$=""THEN590	IO HK
•310 A=-1:IFB=1THEN330	BB	.600 PRINT:PRINT"TAPE OR DISK?":PRINT	HL
•315 GOTO220	FA	.605 GETB\$:T=1:IFB\$="D"THENT=8:A\$="@0:"+A\$:RETURN	NP
•320 IFB=0THENPRINTCHR\$(20);CHR\$(20);:A=A-1	BF	•610 IFB\$<>"T"THEN605	KO
•325 A=A-1	FK	·615 RETURN	PH
-330 PRINTCHR\$(20);:GOTO220 -335 REM LAST LINE	PH		DD
•340 PRINT" ":T=AD-(INT(AD/256)*256)	CP	•625 GOSUB475:IFB=OTHEN620 •630 PRINT:GOTO195	NK
•345 FORB=(/TOA-1:T=T+A%(B):IFT>255THENT=T-255	OD	•635 B\$="BEGIN SCAN AT ADDRESS":GOSUB430:AD=B	HN FK
•350 NEXT	OB		LN
·355 IFA%(A)<>TTHENGOSUB375:GOTO195	LH	•645 PRINT:GOTO670	HI
•360 FORB=0TOA-1:POKEAD+B, A%(B):NEXT	ВО	.650 FORB=0TO7:AC=PEEK(AD+B):GOSUB505:IFAD+B=ENTHENAD=SR:G	
• 365 PRINT:PRINT"YOU ARE FINISHED!":GOTO535 • 370 REM BELL AND ERROR MESSAGES	MB	OSUB410:GOTO195	LM
•375 PRINT:PRINT"LINE ENTERED INCORRECTLY":PRINT:GOTO415	LM JK	•655 PRINT" ";:NEXTB •660 PRINT:AD=AD+8	LE
•380 PRINT: PRINT"INPUT A 4 DIGIT HEX VALUE!":GOTO415	PG	•665 GETB\$:IFB\$=CHR\$(136)THEN195	CD
*385 PRINT: PRINT"ENDING IS LESS THAN STARTING!": B=0:GOTO41	-	•670 GOSUB495:PRINT": "::GOTO650	KE
			10000

1468: 38

1470: 11

11

AE

15

11

FO

14A0: B3 14

1478:

1480:

1488:

1490:

1498:

1460: 2D E6 11 FO 28 BD D6 11 44

11

9 D

11

38

15

FO

98

D6 11

90

D6

DO

FD

DO

11

9D

1F

11

OF

OE

E8

BO

D6

38

AC

AD

A9

15

BD

OB

11

CD

EF

F4

FF

D6

AC

4C

CA

E9

BB

5F

12

CD

EF

98

F7

11

8D

CD

C8

BD

CD

88

CD

F4

DO

38

11

• 1 • 2 • 3 -4 • 5 .6 •10 . 20 .30 0,8 · 41) .50 .60 .70 -100 .110

SPRITESHELL 128 FROM PAGE 48

Warning! Read documentation carefully before entering these programs!

Starting address in hex: 1300 Ending address in hex: 1517

Flankspeed required for entry! See page 79.

SPRITESHELL 128

3 A 88 1 F AC F1 11 98 14A8: 11 90 14B0: 9 D D6 11 AD F4 11 CD F7 AF 13 9C 11 DO OF A9 FF AE F4 08 1300: 78 A9 19 8D 14 03 A9 14B8: 38 FD OE 15 2D 15 DO 8 D BA 14C0: 11 FB E6 1308: 8D 15 03 AD F8 85 03 CE F4 11 30 03 4C 14C8: 15 DO FD 58 32 1310: A9 01 85 FC 8D 11 FA 56 4C 65 8D EE 11 14D0: 37 14 2 A AD F8 11 ED 1318: 60 C6 FB DO E6 60 8D FO 11 FO 20 A5 OE 14D8: 8E EF 11 F6 11 1320: 85 FB AD 14E0: F1 60 8D F8 11 8 A 38 9E F9 11 69 11 1328: FC 18 6D F3 11 AE 14E8: C9 06 90 02 A 9 06 8D F9 82 F9 1F 4C A 7 1330: A4 D8 F0 06 9D F3 11

1338:	3D	13	9 D	F9	07	CA	DO	FO	В3	14F0: 11 8C F3 11 60 8D F2 11 85	
1340:	A 9	01	38	E5	FC		FC	AD	36	14F8: 8E F6 11 8C FA 11 60 8D 16	- 1
1348:	F2	11	DO	03	4C	31	14	A 2	54	1500: F7 11 8A 38 C9 07 90 02 2F	
1350:	00	AD	FA	11	FO	OA	A 9	01	AF	1508: A9 07 8D FB 11 60 01 02 B6	
1358:	38	ED	FD	11	8D	FD	11	AA	D4	1510: 04 08 10 20 40 80 00 00 0D	
1360:	BD	00	DC	29	OF	85	FD	A 9	60		
1368:	OF	38	E5	FD	48	8 A	OA	AA	1 B	SHELL DE/	NO
1370:	68	C9	04	DO	16	DE	D6	11	54		
1378:	DO	OE	8 A	4 A	A8	C8	98	4 D	83	17 1121 01111111111111111111111111111111	LH
1380:	E6	11	8 D	E6	11	DE	D6	11	C4	•20 REM CLEVE BLAKEMORE	KJ
1388:	4C	31	14	C9	08	DO	16	FE	D1	·30 REM 5765 TIVOLI CIRCLE APT. #103	CN
1390:	D6	11	DO	OE	8A	4 A	A8	C8	9 D		DC
1398:	98	4 D	E6	11	8 D	E6	11	FE	FA		GM
13A0:	D6	11	4C	31	14	C9	01	DO	B5	· 60 REM MAKE SURE THESE FILES BELOW EXIST	
13A8:	07	E8	DE	D6	11	4C	31	14	FO	ON DISK BEFORE RUNNING THIS PROGRAM	JB
13B0:	C9	02	DO	07	E8	FE	D6	11	24	•70:	IA
13B8:	4C	31	14	C9	05	DO	1 A	DE	E2	·80 BLOAD"SPRITESHELL 128	IJ
1300:	D6	11	DO	OE	84	4 A	A8	C8	CD	•90 BLOAD"DEMO.SPRITES	BL
13C8:	98	4 D	E6	11	8D	E6	11	DE	OB	·100 :	J0
13D0:	D6	11	E8	DE	D6	11	4C	31	E5	•110 XB=5333:YB=5340	AO
13D8:	14	C9	06	DO	1 A	DE	D6	11	6E	•120 SPRTG=5347	IP
13E0:	DO	OE	8A	4 A	A8	C8	98	4 D	EB	•130 FLAGS=5365:CFLAGS=5375:SHELL=4864	EK
13E8:	E6	11	8 D	E6	11	DE	D6	11	2 D	•140:	MG
13F0:	E8	FE	D6	11	4C	31	14	C9	1C	·150 SYS XB, 24,60	NC
13F8:	09	DO	1 A	FE	D6	11	DO	OE	B2	•160 SYS YB,50,220	BC
1400:	8 A	4 A	A8	C8	98	4 D	E6	11	24	•170 SYS SPRTG,5,6,58	BM
1408:	8 D	E6	11	FE	D6	11	E8	DE	3C	•180 SYS FLAGS,1,1,1	KH
1410:	D6	11	4C	31	14	C9	OA	DO	2E	•190 SYS CFLAGS,8,7	LM
1418:	18	FE	D6	11	DO	OF	8A	8A	OC	·200 COLORO, 1:COLOR1, 3:COLOR4, 1:GRAPHIC1,	
1420:	4 A	A8	C8	98	4 D	E6	11	8 D	47	1	DK
1428:	E6	11	FE	D6	11	E8	FE	D6	C5	•210 BOX1,0,0,310,190:SPRSAV3,A\$:SPRSAVA\$	
1430:	11	AE	FB	11	8E	F4	11	AD	3F	,4:SPRSAV2,A\$:SPRSAVA\$,3:SPRSAV1,A\$:SPRS	
1438:	F4	11	OA	AA	4 A	A8	B9	OE	AD	AVA\$,2	BA
1440:	15	2 D	E6	11	DO	14	BD	D6	F3	•220 FORX=3TO8:MOVSPRX,173,140:MOVSPRX,60	
1448:	11	38	CD	EE	11	BO	OB	AC	C7	;(X-1)*45:SPRITEX,1,X:NEXT	EO
1450:	EE	11	C8	98	9 D	D6	11	4C	83	•230 FORX=1TO2:MOVSPRX,173,140:SPRITEX,1,	1000000
1458:	В3	14		4 A		В9	OE	15	7 A	2:NEXT	NH
				100		- 27					

·240 SYS SHELL	AI ·120 RETURN AG
.250 MOVSPR((RND(1)*6)+3),(RND(1)*8)*45#1 :GOTO250	• 200 REM #2 - FLOATING POINT MATH ND AF • 210 FOR N=1 TO 1000
.0010257	213 104 11-1 10 1333
DEMO.SPR	
Starting address in hex: 0E00	•300 REM #3 - STRING MANIPULATIONS EF
Ending address in hex: OECO	•310 FOR N=1 TO 1000 EG
The state of the s	•320 N\$=MID\$(LEFT\$(N\$+"AHOY",3),2,1) NH
	•330 NEXT : RETURN JI
0E00: 00 00 00 00 00 00 00	OO ·400 REM #4 - DISK WRITE GI
	5C •410 DOPEN #1,"@TEST,S",W OL
[]	AO •420 FOR N=1 TO 1000 LM
	55 •430 PRINT#1,N
	24 ·440 NEXT : DCLOSE : RETURN EC
	FD •500 REM #5 - DISK READ DL 79 •510 DOPEN #1,"TEST,S" JN
	경기를 보고 있는 그 그 사람들이 가장 하는 사람들이 되었다. 그 그 그 그 그 그 그 그 그 그 그 그 그 그 그 그 그 그 그
	01 •520 FOR N=1 TO 1000 CF 40 •530 INPUT#1, K
	58 ·540 NEXT : DCLOSE : RETURN KH
	C9 ·600 REM #6 - VERTICAL PRINTING AL
	FB •610 FOR N=1 TO 1000 IP
	1A ·620 PRINT N FP
	68 ·630 NEXT : RETURN LP
네 나는 그 이 화물으로 하는 발생이 살아가 되었다. 중 위한 화송 다른 하는 하다 하다 나라다.	70 ·700 REM #7 - HORIZONTAL PRINTING OP
	88 •710 FOR N=1 TO 1000 ND
	80 ·720 PRINT N; PL
	88 ·730 NEXT : RETURN CD
	90 ·800 REM #8 - RANDOM NUMBERS CJ
	F8 •810 FOR N=1 TO 1000 EE BA •820 K=RND(0)*320 : K=RND(0)*200 BC
- Hours Handwick (1987) - 프로젝트 프로그램 -	
	A8 ·830 NEXT : RETURN BO ·900 REM #9 - RANDOM POINTS DG
OEB8: 00 00 00 00 00 00 00 10 (C8 •910 GRAPHIC 0 : GRAPHIC 1,1 EC
0ECO: 01 C1	•920 FOR N=1 TO 1000 KK
	•930 DRAW, RND(0)*320, RND(0)*200 JM
THE 128 VERSUS	•940 NEXT DB
	•950 GRAPHIC 0: GRAPHIC 5: RETURN NP
THE CLONES	·1000 REM #10 - RANDOM LINES GG
FROM PAGE 32	·1010 GRAPHIC 0: GRAPHIC 1,1 KG
	- 1020 FOR N=1 TO 100 NF
BENCHMARKS GALO	thoos numicolators
·1 REM	TO 1616 Norm
•2 REM BENCHMARKS GALORE	THE 1656 ODIDUTO 6
•3 REM RUPERT REPORT #45	MH ·1100 REM #11 - RANDOM CIRCLES FB
•4 REM C-128	JC ·1110 GRAPHIC 0: GRAPHIC 1,1 BJ
•5 REM	JC •1120 FOR N=1 TO 50 CK
•6 OPEN4,4	DE •1130 CIRCLE, RND(0)*320, RND(0)*200, RND(0)
•10 FOR B=1 TO 11	LL *50 BD
· 20 FAST : TO=TI	CN ·1140 NEXT PK
•30 ON B GOSUB 100, 200, 300, 400, 500, 600, 70	A CONTRACTOR OF THE PROPERTY O
0,800,900,1000,1100	OH
•40 PRINT#4, "BENCHMARK #";B •50 PRINT#4, (TI-TO)/60;"SECONDS"	OH Many of the products advertised
37 TRIMITY, (11-17)/07; SECONDS	OF in Abov! are available at

PΙ

OH

HL

NL

EMO

LH KJ CN DC GM

JB IA IJ BL JO AO IP EK MG NC BC BM KH LM

DK

BA

EO

NH

· 60 NEXT B

•70 PRINT#4 : CLOSE 4 : END

•100 REM #1 - SIMPLE FOR/NEXT LOOP •110 FOR N=1 TO 10000 : NEXT N Many of the products advertised in Ahoy! are available at discount prices to members of the Ahoy! Access Club. See page 49.

HOOPS FROM PAGE 18

Starting address in hex: C000 Ending address in hex: C7E7

Flankspeed required for entry! See page 79.

```
C1B0: C4
                                                         79
                                                             AD
                                                                 C4
                                                                     A8
                                                                        AE
                                                                             73
                                                                                 C4
                                                                                     FO
                                                         79
                                                            C4
                                                                 20
                                                                     4A
                                                                         C2
                                                                             C9
                                                                                 20
                                                                                     BB
                                             C1B8:
                                                     AD
SYS to start: 49152
                                                         2C
                                                                     BO
                                                                         33
                                                                                     DF
                                                     FO
                                                             C9
                                                                 02
                                                                             CD
                                                                                 84
                                             C1C0:
                                                         FO
                                                             26
                                                                     82
                                                                         C4
                                                                             CO
                                                                                 05
                                                                                     5E
                                             C1C8:
                                                     C4
                                                                 AC
COOO: A9 8E 20 D2 FF
                          A9 08
                                   20 FC
                                             C1D0:
                                                     90
                                                         1C
                                                            48
                                                                 AA
                                                                     FE
                                                                         7 F
                                                                             C4
                                                                                 20
                                                                                    D3
                                                     6 E
                                                         C3
                                                             A9
                                                                 00
                                                                     8D
                                                                         81
                                                                             C4
                                                                                 A 9
                                                                                     32
C008: D2
           FF
               AO
                   nn
                       B9
                           E2
                               C6
                                   99
                                       78
                                             C1D8:
                                       53
                                             C1E0:
                                                     05
                                                         8D
                                                             82
                                                                 C4
                                                                     AO
                                                                         80
                                                                             8C
                                                                                 OB
                                                                                     73
           3F
               C8
                   DO
                       F7
                           AG
                               18
                                   B9
C010: 00
                                                         C8
                                                             8C
                                                                 OB
                                                                     D4
                                                                         68
                                                                             8D
                                                                                 84
                                                                                     6 D
                                             C1E8:
                                                     D4
           C4
               99
                           88
                               10
                                   F7
                                       D6
C018: FA
                   00
                       D4
                                             C1FO:
                                                     C4
                                                         A5
                                                             FB
                                                                 8D
                                                                     6D
                                                                        C4
                                                                             4C
                                                                                 OC
                                                                                     6F
       A 9
           nn
               8D
                   17
                       DO
                           8D
                               1 B
                                   DO
                                       B8
C020:
                                                             A2
                                                                 29
                                                                     OF
                                                                         8D
                                                                             81
                                                                                 C4
                                                                                     10
                                       CA
                                             C1F8:
                                                     C2
                                                         A5
CO28: A9
           03
               8D
                   1C
                       DO
                           8D
                               1 D
                                   DO
                                             C200:
                                                     AC
                                                         82
                                                             C4
                                                                 B9
                                                                     C1
                                                                         C.4
                                                                             8D
                                                                                 82
                                                                                     44
                           9 D
                               27
                                       77
C030: A2
           05
               BD
                   87
                       C4
                                   DO
                                                         20
                                                                 C3
                                                                     AC
                                                                         83
                                                                             C4
                                                                                 A5
                                                                                     65
                                             C208:
                                                     C4
                                                             1 A
           8D
               C4
                   9D
                       F8
                           07
                               CA
                                   10
                                       CO
       BD
C038:
                                             C210:
                                                     04
                                                         39
                                                            A3
                                                                 C4
                                                                     DO
                                                                         33
                                                                            18
                                                                                 AD
                                                                                     7 F
                                       17
               02
                   8D
                       25
                           DO
                               A9
                                   OC
CO40:
       F1
           A9
                                                     73
                                                         C4
                                                             79
                                                                 AD
                                                                     C4
                                                                         AA
                                                                             AD
                                                                                 79
                                                                                     OE
                                       F4
                                             C218:
C048: 8D
           26
               DO
                   A9
                       nn
                           8D
                                20
                                   DO
                                                         79
                                                             B7
                                                                 C4
                                                                     AC
                                                                         6D
                                                                             C4
                                                                                 20
                                                                                     D9
                           99
                               7 F
                                   C4
                                       55
                                             C220:
                                                     C4
C050: 8D
           21
               DO
                   An
                       07
                                                         C2
                                                             C9
                                                                 02
                                                                     90
                                                                         1 B
                                                                             C9
                                                                                 20
                                                                                     96
                       8D
                               C5
                                   20
                                       A9
                                             C228:
                                                     4 A
C058:
        88
           10
               FA
                   A9
                           AG
                                                                         73
                                                                                 A5
                                       7 A
                                             C230:
                                                     DO
                                                         OB
                                                             A 5
                                                                 FC
                                                                     8D
                                                                             C4
                                                                                     1 A
           C3
               A 2
                   09
                       AG
                           01
                               18
                                   20
C060:
       DO
                                                             79
                               20
                                   DO
                                       6 D
                                             C238:
                                                     FD
                                                         8D
                                                                 C4
                                                                     60
                                                                         AC
                                                                             83
                                                                                 C4
                                                                                     57
           FF
               A9
                   13
                       AG
                           C5
C068: F0
                                                         C1
                                                                     83
                                                                         C4
                                                                             20
                                                                                     90
                                                     B9
                                                             C4
                                                                 8D
                                                                                 1 A
C070: C3
           A 2
               09
                   AO
                       26
                           18
                                20
                                   FO
                                       CF
                                             C240:
                           20
                               DO
                                   C3
                                       6A
                                             C248:
                                                     C3
                                                         60
                                                             84
                                                                 FB
                                                                     86
                                                                         FC
                                                                             85
                                                                                 FD
                                                                                     F3
       FF
            A9
                2D
                   AG
                       C5
C078:
                                                             85
                                                                 3B
                                                                             85
                                                                                     2A
                           C3
                                       F 2
                                             C250:
                                                     A 9
                                                         00
                                                                     A 9
                                                                         04
                                                                                 3C
       20
            E6
               C3
                   20
                        6 E
                                A 9
                                   AB
C080:
                                                                     4 A
                                                                                 A8
                                             C258:
                                                     38
                                                         98
                                                             E9
                                                                 21
                                                                         4A
                                                                             4 A
                                                                                     BB
                                   C4
                                       30
C088:
       8D
            73
               C4
                   A 9
                       78
                           8D
                                6 D
                                       93
                                             C260: F0
                                                         10
                                                             18
                                                                 A5
                                                                     3 B
                                                                         69
                                                                             28
                                                                                 85
                                                                                     71
        A9
            61
               8D
                   75
                       C4
                           A9
                                F8
                                   8 D
C090:
                                                         A 5
                                                             3C
                                                                 69
                                                                     00
                                                                         85
                                                                             3C
                                                                                 88
                                                                                     39
                        8D
                            79
                                C4
                                   8D
                                       D6
                                             C268:
                                                     3 B
C098:
        76
            C4
                A9
                   (1)()
                                                                     E9
                                                                         OC
                                                                             85
                                                                                 FE
                                                                                     6F
           C4
               8D
                   7C
                       C4
                            20
                                2E
                                   C4
                                       C2
                                             C270:
                                                     DO
                                                         FO
                                                             38
                                                                 8 A
COAO:
       7 B
                           A9
                                                         FD
                                                             E9
                                                                 00
                                                                     4A
                                                                         66
                                                                             FE
                                                                                 46
                                                                                     FB
                               04
                                   8D
                                       34
                                             C278:
                                                     A5
            33
               8D
                   15
                       DO
COA8: A9
                                                                     FE
                                                                         B1
                                                                             3 B
                                                                                 60
                                                                                     B5
                   A2
                        29
                               09
                                   04
                                       77
                                             C280:
                                                     FE
                                                         46
                                                             FE
                                                                 A4
COBO:
       82
           C4
               A5
                           01
                                                         6 D
                                                             C4
                                                                 C9
                                                                     DC
                                                                         90
                                                                             5D
                                                                                 AD
                                                                                     AA
       8D
            83
               C4
                    A2
                        OC
                           AG
                               OC
                                   18
                                       02
                                             C288:
                                                     AD
COB8:
                                                             C9
                                   A2
                                       D1
                                             C290:
                                                     7 F
                                                         C4
                                                                 15
                                                                     BO
                                                                         07
                                                                             AD
                                                                                 80
                                                                                     99
COCO:
       20
            FO
               FF
                   A 9
                        4 D
                           AG
                                C5
                                                                 90
                                                                     05
                                                                             68
                                                                                 4C
                                                                                     EE
                   C3
                        38
                           E9
                                31
                                   8D
                                       ED
                                             C298:
                                                     C4
                                                         C9
                                                             15
                                                                         68
COC8:
        33
            20
               2 D
                                   AG
                                             C2AO:
                                                     ED
                                                         C2
                                                             A2
                                                                 01
                                                                     AD
                                                                         79
                                                                             C4
                                                                                 DO
                                                                                     B1
        7 D
            C4
                    DO
                        29
                            A 2
                                OC
                                       05
                A8
CODO:
                                                             73
                                                                     C9
                                                                             BO
                        FF
                                                     08
                                                                 C4
                                                                         AB
                                                                                 01
                                                                                     BD
                                5F
                                       B8
                                             C2A8:
                                                         AD
       OD
            18
                20
                    FO
                            A9
                                    AG
COD8:
                                                     CA
                                                         18
                                                             BD
                                                                 75
                                                                     C4
                                                                         69
                                                                             12
                                                                                 85
                                                                                     80
                                       97
                                             C2BO:
COEO:
       C5
            A2
               37
                   20
                        2 D
                           C3
                                8D
                                    78
                                   A2
                                             C2B8:
                                                     02
                                                         BD
                                                             7 B
                                                                 C4
                                                                     69
                                                                         ()()
                                                                             85
                                                                                 03
                                                                                     AA
        C5
            38
               E9
                    2A
                        8D
                           7 E
                                C4
                                       6E
COE8:
                                                                 ED
                                                                     73
                                                                         C4
                                                                             85
                                FF
                                    A9
                                        7 A
                                             C2CO:
                                                     38
                                                         A5
                                                             02
                                                                                 02
                                                                                     4E
       06
            AO
                10
                    18
                        20
                            FO
COFO:
                        DO
                                             C2C8:
                                                    A 5
                                                         03
                                                             ED
                                                                 79
                                                                     C4
                                                                         DO
                                                                             1D
                                                                                 38
                                                                                     C3
                           C3
                                A9
                                    3F
                                       6C
       6F
            An
               C5
                    20
COF8:
                                                                 02
                                                                     C9
                                                                                     3 A
                                                    A 9
                                                         24
                                                             E5
                                                                         25
                                                                             BO
                                                                                 14
                                    29
                                       31
                                             C2D0:
       8D
            15
               DO
                   E6
                        04
                            A 5
                                04
C100:
                                A2
                                                         4A
                                                             8D
                                                                 83
                                                                     C4
                                                                         A 5
                                                                             A 2
                                                                                 29
                                                                                     B4
                                   nn
                                        25
                                             C2D8:
                                                    4 A
C108:
        07
            DO
               18
                    AD
                        (1(1)
                           DC
                                                     3F
                                                         8D
                                                             81
                                                                 C4
                                                                     A9
                                                                         50
                                                                             8D
                                                                                 82
                                                                                     AD
C110:
        20
            2F
                CI
                    AD
                        01
                            DC
                                AE
                                    7 D
                                       D8
                                             C2E0:
                    20
                                A 2
                                    01
                                        AG
                                             C2E8:
                                                     C4
                                                         20
                                                             1 A
                                                                 C3
                                                                     60
                                                                         A 2
                                                                             OC
                                                                                 AG
                                                                                     5 B
       C4
            DO
                03
                        6A
                           C1
C118:
                                                     OC
                                                         18
                                                             20
                                                                 FO
                                                                     FF
                                                                         EE
                                                                             86
                                                                                 02
                                                                                     9 D
                                   88
                                       49
                                             C2FO:
C120:
        20
            2F
                C1
                   20
                        8D
                            C1
                                20
                                             C2F8: AO
                                                         ()()
                                                             B9
                                                                 7 B
                                                                     C5
                                                                         FO
                                                                             EE
                                                                                 20
                                                                                     94
                                    29
                                        38
            20
                2E
                   C4
                        4C
                           03
                                C1
C128:
        C2
                    A8
                                             C300:
                                                     D2
                                                         FF
                                                             A 5
                                                                 A 2
                                                                     C5
                                                                         A 2
                                                                             FO
                                                                                 FC
                                                                                     71
C130:
        OC
            4 A
               4 A
                        18
                            BD
                                75
                                    C4
                                       89
                                                                             FO
        79
            9 B
                C4
                    85
                        02
                            BD
                                7 B
                                    C4
                                        97
                                             C308: C8
                                                         AD
                                                             ()()
                                                                 DC
                                                                     29
                                                                         10
                                                                                 07
                                                                                     8C
C138:
        79
            9F
                C4
                    85
                        03
                            38
                                A5
                                    02
                                        86
                                             C310:
                                                     AD
                                                         01
                                                             DC
                                                                 29
                                                                     10
                                                                         DO
                                                                             E3
                                                                                 4C
                                                                                     D5
C140:
                                             C318:
                                                         CO
                                                             A 2
                                                                 40
                                                                     AG
                                                                         80
                                                                             8E
                                                                                 04
                                                                                     BA
                                                     4 B
        FD
            93
                C4
                    A 5
                        03
                            FD
                                95
                                    C4
                                        9F
C148:
                                                             12
                                                         8C
                                                                 D4
                                                                     E8
                                                                         C8
                                                                             8E
                                                                                 04
                                                                                     AC
                                             C320:
                                                     D4
                        02
                            FD
                                97
                                    C4
                                        32
       90
            17
                38
                    A5
C150:
                                             C328:
                                                     D4
                                                         8C
                                                             12
                                                                 D4
                                                                     60
                                                                         86
                                                                             05
                                                                                 20
                                                                                     7C
C158:
       A 5
            03
                FD
                    99
                        C4
                            BO
                                OA
                                    A5
                                       BD
                                                     DO
                                                         C3
                                                             A9
                                                                 ()()
                                                                     85
                                                                         C6
                                                                             A 5
                                                                                 A 2
                                                                                     03
                        A5
                                             C330:
C160:
       02
            9D
                75
                   C4
                            03
                                9 D
                                    7 B
                                       FB
                                             C338:
                                                     29
                                                         10
                                                             85
                                                                 C7
                                                                     A 9
                                                                         20
                                                                             20
                                                                                 D2
                                                                                     7 B
       C4
            60
                18
                    AD
                        73
                            C4
                                6 D
                                    7E
                                        77
C168:
                                                                     D2
C170:
       C4
            85
                02
                    AD
                        79
                            C4
                                69
                                    nn
                                        12
                                             C340:
                                                     FF
                                                         A 9
                                                             9 D
                                                                 20
                                                                         FF
                                                                             A 9
                                                                                 nn
                                                                                     24
                                             C348:
                                                     85
                                                         C7
                                                             20
                                                                 E4
                                                                     FF
                                                                         C9
                                                                             31
                                                                                 90
                                                                                     26
            03
                An
                   07
                        38
                                76
                                    C4
                                       C9
C178: 85
                           AD
                                                            05
                                                                 BO
                                                                             20
                                             C350:
                                                     E5
                                                         C5
                                                                     E1
                                                                         48
                                                                                 D2
                                                                                     CE
C180:
       E5
            O2 AD
                   7C
                       C4 E5
                               03
                                    90
                                       DO
                                             C358: FF
                                                         18 A5 A2
                                                                     69 28 C5
                                                                                A2
                                                                                     B2
C188: 02 AO OB 98
                       60 18
                                AD
                                   81
                                       76
```

C190: C4

C198:

C1A0:

C1A8:

69

C9

82

A3

nn

8D

39

02 A8

BO

AC

DO

OA

C4

C4

AD

06

82

5F

82

8C

C4

18

C4

81

A 5

AD

69

C4

04

6D

C7

F5

13

AD

C530: 9D A1 11 9D A1 11 9D A1 C360: D0 FC A2 OF A9 20 9D EC 34 05 CA 10 FA 68 60 AD 7 F 39 C538: 11 9D 9D 9D 9D 9D 9D 9 D C370: C4 20 C3 C540: 9D C3 48 An 2A A9 99 90 5A 40 40 40 40 40 0A 99 C378: 04 20 C3 68 AA AG 2E DB C548: 1C DO 05 A1 00 9F 50 4C 18 C380: A9 04 20 99 C3 AD 80 C4 9 E C550: 41 59 45 52 53 20 28 31 4F C558: 2F 32 29 C388: 20 C3 C3 48 AD 47 A9 04 OE 20 20 05 nn 45 56 45 C390: 20 99 C3 68 AA AO 4B A9 **B6** C560: 4C 4C 20 28 31 53 2D 36 29 20 C398: 04 84 3 B 85 3C 84 OA 5D C568: 20 05 (1)() 1F 59 AA C570: 12 4C 45 56 45 C3AO: BD E6 C4 8D 85 C4 BD E7 87 4C 20 20 3 C C578: 20 92 00 50 52 45 53 53 C3A8: C4 8D 86 C4 A2 OE A9 20 CO B9 20 46 49 52 45 20 42 C580: 55 7 F C3B0: 4E 86 C4 6E 85 C4 90 02 95 C3B8: A9 C588: 54 54 4F 4E nn 93 12 51 BC D7 C4 91 3 B CA A4 1F 93 C590: 20 AC A2 A2 A2 A2 A2 A2 2D C3C0: 10 EC 60 A2 00 C9 DA 90 25 C598: A2 C3C8: 06 E9 OA E8 4C C5 C3 60 E1 BB A7 B8 B8 **B8** B8 B8 3 A C5AO: B8 B8 B8 B8 B8 C3D0: 85 39 84 3A AO ()() B1 39 D9 B8 B8 **B8** 66 C5A8: B8 B8 B8 B8 B8 A5 C3D8: F0 0B 20 D2 FF **C8** DO F6 58 AC A 2 39 C5B0: A2 A2 A2 C3E0: E6 3A 4C D6 C3 60 A9 18 OB A2 A2 A2 BB 20 5C C3E8: 85 3B 85 A7 A9 05 85 3C 47 C5B8: 12 20 92 A1 05 20 20 20 84 20 20 20 20 C3F0: A9 D9 85 A8 A2 11 A9 74 74 C5CO: 12 1F A1 A 7 BB C3F8: A0 00 91 A9 91 A7 55 C5C8: 20 20 BO C3 C3 C3 C3 8C 3 B OC C3 A7 C400: A0 27 91 C5D0: C3 C3 C3 C3 C3 C3 A9 6A 91 3 B E1 C3 AE D9 28 C408: 18 A5 3B 3B C5D8: 20 20 A5 69 85 85 D8 92 A1 05 20 20 38 C5E0: 20 C410: A7 A5 3C 69 00 85 3C 29 ED 20 20 20 20 12 1F A1 54 9D C418: 03 09 D8 85 A8 CA DO D6 C5E8: 20 20 92 A1 05 20 20 20 C2 C420: A9 A0 99 CO 07 A9 OC 99 1 B C5F0: 20 20 20 20 12 1F A1 A7 EB 88 F3 C5F8: 20 C428: CO DB 10 6 D CC 20 60 AD C2 92 99 20 AE BO A 7 C430: C4 8D 6E C4 AD C4 8D 29 C600: D5 C9 C9 73 D5 B2 C9 D5 C9 5 B 7 A C438: 74 C4 AD 79 C4 8D C4 2A C608: 20 1F 12 C2 20 20 A5 92 94 C440: A2 05 84 OA A8 BD 6B C4 13 C610: A1 05 20 20 20 20 20 20 77 C448: 99 01 DO BD 71 C4 99 00 41 C618: 20 12 1F 20 A1 20 92 A1 7 F C450: DO AD 10 2C C620: 05 20 20 20 20 DO 3D D1 C4 A8 20 20 20 06 C628: 12 1F A1 20 20 38 C458: BD 77 C4 29 01 FO 05 98 OB A7 C2 92 C630: 99 20 AB C2 C2 C2 54 C460: 1D CB C4 A8 8C 10 DO CA EE B3 C2 C468: 10 D8 60 99 99 nn (1)() DC C1 C638: AB CB CA C9 20 1F 12 C2 58 C640: 20 20 A5 C470: DC 2E 16 00 00 00 nn 00 91 92 A1 05 20 20 9F C478: 01 00 79 C648: 20 20 20 20 20 12 00 00 00 00 00 00 1F A1 BB C650: 20 20 92 20 C480: 00 00 (11) 00 00 (11) (11) A1 05 20 01 81 20 2 A C658: 20 20 20 20 12 C488: 01 09 08 02 07 FC FC FE 9C 1F A1 A 7 53 C490: FD FF FF 1 B B9 ()() nn 114 C660: 20 20 C2 92 99 20 BD AD 1 B AO C498: 3E 00 01 00 01 FF nn C668: CA CB CA CB B1 20 50 D8 CA CB FD FF 00 01 03 C670: 20 1F 12 C2 20 C4AO: 00 07 OF 1F D9 20 A5 92 FC OF C678: A1 05 20 20 20 C4A8: 1F 07 03 01 FF FF FF 20 E1 20 20 DF 12 1F C680: 20 A1 20 20 92 E7 C4BO: FF FF 01 01 01 01 01 FF **B**5 A1 C688: 05 20 20 20 20 20 20 C4B8: FF FF FF FF 00 00 20 6 E (1)() 00 **B8** C690: 12 1F A1 20 20 A7 AD C3 BC C4CO: 00 08 07 06 05 05 04 04 E7 C698: C3 C3 C3 C3 C3 C3 C3 C3 B6 C4C8: 03 02 01 01 02 04 08 10 ED C6A0: C3 C3 BD 20 20 20 FE FD FB F7 EF C3 A5 92 22 C4DO: DF 00 B1 C6A8: A1 05 20 28 20 20 20 20 20 10 01 02 29 2A 50 C4D8: 51 52 4B 20 12 AG C6B0: 1F A1 20 33 78 79 7 A 20 BC 92 C4E0: A1 A 2 6F 7 B 1 D C6B8: A2 A2 A2 A2 C4E8: 97 2C E7 73 CF 73 C9 5 B A2 A2 A 2 12 3 D 70 C4FO: CF 79 EF 79 92 C6CO: BE A 7 20 20 72 EF 7 B 14 20 20 20 20 E7 20 20 20 20 20 C4F8: CF 7 B 00 08 00 00 08 60 C6C8: 20 20 20 C9 00 C6D0: 20 20 20 20 A5 C500: 00 C8 F3 00 ()() 00 68 25 BC 92 A 2 E8 00 C6D8: A2 A2 A2 C508: 00 06 00 00 A 2 A2 A 2 12 BE 79 (1) 17 00 00 25 C6E0: 20 00 00 00 00 C510: 2D F5 2F 05 12 A1 11 9D C9 55 55 54 FF 11 9D C6E8: 55 55 54 CC CC C518: A1 A1 11 9D A1 11 6 B CC 88 88 5F C520: 9D A1 92 1C CF 90 FO C6F0: 88 8B 8B 88 B8 B8 **B8** 88 CB 41 41 C528: 41 41 41 5A 00 05 A1 11 FD C6F8: 88 88 CC CC CC 22 22 20 D4

141,50,193,1556

1,49,193,1535

9,141,49,1528

C700:	2 E	2 E	20	22	E2	EO	22	22	A6	
C708:	20	33	33	30	08	88	80	08	D7	
C710:	B8	80	OB	8B	80	OC	CC	CO	F9	
C718:	02	22	00	02	EE	()()	03	23	53	
C720:	00	26	00	00	00	00	00	()()	46	
C728:	00	00	00	00	00	00	00	00	28	
C730:	00	00	00	00	50	00	00	00	30	
C738:	00	00	00	00	00	00	00	00	38	
C740:	00	7 F	00	01	FF	CO	03	FF	84	
C748:	EO	07	FF	FO	07	FF	FO	07	20	
C750:	FF	FO	07	FF	FO	07	FF	FO	31	
C758:	03	FF	EO	01	FF	CO	nn	7 F	7 D	
C760:	00	26	00	00	00	00	00	00	86	
C768:	00	00	00	00	00	00	00	00	68	
C770:	00	90	00	00	00	00	00	00	70	
C778:	00	00	COCO	00	00	55	()()	00	78	
C780:	90	7 F	00	01	88	CO	02	88	D4	
C788:	AO	04	49	10	04	49	10	07	EA	
C790:	FF	FO	04	49	10	04	49	10	3 C	
C798:	02	88	An	01	88	CO	00	7 F	8 D	
C7AO:	00	26	()()	50	00	00	00	00	C6	
C7A8:	00	00	00	00	00	00	00	00	A8	
C7B0:	00	50	00	00	00	00	00	00	BO	
C7B8:	00	00	00	00	00	00	00	00	B8	
C7CO:	00	00	00	00	00	50	00	00	CU	
C7C8:	00	00	00	00	01	FF	80	OF	59	
C7D0:	FF	FO	3F	FF	FC	7 F	FF	FE	7C	
C7D8:	FF	FF	FF	FF	FF	FF	FF	FF	D8	
C7E0:	FF	00	00	00	00	00	00	00	EO	

CENTERFOLD FROM PAGE 22

-10 REM *** CENTERFOLD *** BUCK CHILD	RESS FH
•20 REM *** P.O. BOX 13575 SALEM, OR	9730
9 ***	OA
·30 PRINTCHR\$(147)"LOADING AND CHECKI	NG D
ATA LINE:":D=49152	PA
•40 FORA=OTO11: READB	PN
•50 IFA=OTHENF=PEEK(64)*256+PEEK(63):	PRIN
TCHR\$(19)TAB(31)F:PRINT	AM
•60 IFB<00RB>255THEN80	FI
•70 POKED+A, B: E=E+B: C=C+1: NEXTA: READB	:IFB
=ETHEN90	CI
•80 PRINT"ERROR IN DATA LINE: "F:END	PA
•90 E=0:D=D+12:IFC<312THEN40	CL
·100 PRINT"THE DATA IS OK[3"."]":PRIN	T FB
·110 PRINT"SYS 49152 TO ACTIVATE[3"."]":E
ND	OB
•120 DATA169, 18, 162, 192, 160, 0, 120, 141	,143
,2,142,144,1393	NC
•130 DATA2,140,49,193,88,96,173,49,19	3,20
8,28,165,1384	MG
•140 DATA207, 208, 24, 173, 141, 2, 174, 50,	193,

3H 1H6 /3H 1H8 16H	VIV
*360 DATA105,133,107,133,109,133,111,96,2 30,106,230,108,1601	MK
	OL
12,169,0,133,1552	OL
·350 DATA216,162,198,160,25,133,110,134,1	
,134,108,169,1655	KO
•340 DATA144,236,96,169,4,162,194,133,106	
5,106,201,8,1654	LI
·330 DATA145,111,200,208,245,32,40,193,16	
,107,177,109,1504	LJ
·320 DATA88,192,32,11,193,168,177,105,145	
240, 255, 76, 1605	LP
·310 DATA139,174,53,193,172,54,193,24,32,	
3,201,20,208,1886	NI
·300 DATA193,208,155,238,52,193,173,52,19	
,206,60,1079	GN
•290 DATA105,40,32,31,193,144,3,32,40,193	
,165,105,24,1449	NK
·280 DATA59,193,145,109,206,55,193,16,179	
,145,105,173,1748	DN
•270 DATA193,56,237,55,193,168,173,57,193	
0,24,109,52,1302	FE
•260 DATA145,105,173,58,193,145,109,169,2	
173,56,193,1509	MF
•250 DATA56,237,52,193,24,109,55,193,168,	
9,193,169,19,1544	KM
-240 DATA177,107,141,57,193,177,111,141,5	
,55,193,168,1597	PA
·230 DATA177,111,141,58,193,169,39,56,237	
7,141,56,193,1676	OD
•220 DATA193,141,55,193,172,55,193,177,10	
93,173,52,1376	CC
•210 DATA193,32,68,229,32,11,193,140,60,1	
3,193,140,54,1723	PJ
•200 DATA166,214,164,211,141,52,193,142,5	
96,169,0,1391	FO
•190 DATA193,141,32,208,169,0,141,49,193,	
92,173,51,1401	CG
08,141,51,1499 •180 DATA193,24,105,8,141,32,208,32,242,1	
	BK I

·150 DATA236,50,193,240,10,201,5,208,9,14

·160 DATA32,67,192,76,72,235,201,6,208,24

•170 DATA193,32,94,192,76,72,235,173,32,2

FD

CO

II

PROBLEMS ENTERING A PROGRAM?

Help is available from the *Ahoy!* Programming Department at 212-239-6089 (if busy or no answer after three rings call 212-239-0855).

CRYSTALLUS FROM PAGE 16

Starting address in hex: C000 **Ending address in hex: CA48**

ms!

FD

CO

II

BK

CG

FO

PJ

CC

OD

PA

KM

MF

FE

DN

NK

GN

NI

LP

LJ

LI

KO

OL

MK

EL

```
A 9
                                                                  60
                                                                      85
                                                                           FC
                                                                               AE
                                                                                    19
                                                                                        C2
                                                                                             A 3
                                                 ClAO:
                                                         FB
                                                                  FO
                                                                      10
                                                                           A 5
                                                                               FB
                                                                                    18
                                                                                        69
                                                         EO
                                                              (1)
                                                                                             AD
                                                 C1A8:
SYS to start: 49152
                                                                               69
                                                         58
                                                              85
                                                                  FB
                                                                      A 5
                                                                           FC
                                                                                    00
                                                                                        85
                                                                                             1C
                                                 C1BO:
                                                              CA
                                                                  DO
                                                                      FO
                                                                           A 9
                                                                               D1
                                                                                    85
                                                                                        02
                                                                                            45
Flankspeed required for entry! See page 79.
                                                 C1B8:
                                                         FC
                                                                                    AG
                                                 C1C0:
                                                         A 9
                                                              04
                                                                  85
                                                                      03
                                                                           A 2
                                                                               CC
                                                                                        14
                                                                                             5 A
                                                 C1C8:
                                                                  91
                                                                      02
                                                                           88
                                                                               10
                                                                                    F9
                                                                                        18
                                                         B1
                                                              FB
                                                                                             B4
                                   20
                                       D5
                                           98
                                                 C1D0:
                                                         A 5
                                                              02
                                                                  69
                                                                       28
                                                                           85
                                                                               02
                                                                                    A5
                                                                                        03
                                                                                             3 A
coops:
            7 D
                C5
                     20
                          5 B
                              C3
        20
                                                                  85
                                                                               A5
                                                                                             ED
                              49
                                   C1
                                       FO
                                            67
                                                              (1)
                                                                      03
                                                                           18
                                                                                        69
        C6
             20
                     C2
                          AD
                                                 C1D8:
                                                         69
C008:
                 OC
                              C1
                                       20
                                            26
                                                 C1E0:
                                                         58
                                                              85
                                                                  FB
                                                                      A5
                                                                           FC
                                                                               69
                                                                                    nn
                                                                                        85
                                                                                            4C
        OA
             A 9
                 nn
                     8D
                          49
                                   A 9
CO10:
                                                                                    2F
                                                                                             25
                 C1
                          4 A
                              C1
                                  C9
                                       24
                                            8F
                                                 C1E8:
                                                         FC
                                                              CA
                                                                  10
                                                                       DA
                                                                           60
                                                                               8D
                                                                                        6C
CO18:
        20
             ED
                      AD
                                            74
                                                         EE
                                                              4 A
                                                                  C1
                                                                           (11)
                                                                               20
                                                                                    10
                                                                                        C3
                                                                                             80
             03
                 20
                          C3
                              AD
                                   1 D
                                       C1
                                                 CIFO:
                                                                       An
CO20:
        DO
                     10
                                                                           F8
                              20
                                   9C
                                       C1
                                            7 F
                                                 C1F8:
                                                         C8
                                                              CO
                                                                  02
                                                                       DO
                                                                               AD
                                                                                    4 A
                                                                                        C1
                                                                                             08
        FO
             03
                 4C
                     D7
                          CO
CO28:
                                            42
                                                              24
                                                                           20
                                                                               B3
        20
             39
                 CO
                     20
                          C1
                              CO
                                   4C
                                       19
                                                 C200:
                                                         C9
                                                                  DO
                                                                      03
                                                                                    C2
                                                                                        60
                                                                                             B8
C030:
                                                              FF
        CO
                     C1
                                       DO
                                            20
                                                         FF
                                                                  00
                                                                       60
                                                                           AD
                                                                               111
                                                                                    DC
                                                                                        C9
                                                                                             BC
C038:
             EE
                 1 B
                          AD
                              1 B
                                   C1
                                                 C208:
                                       C9
                                            5 B
        F8
             EE
                 1C
                     C1
                          AD
                              1C
                                   C1
                                                 C210:
                                                         7 F
                                                              FO
                                                                  F8
                                                                       8D
                                                                           OA
                                                                               C2
                                                                                    C9
                                                                                        7 E
                                                                                             1C
             DO
                              8D
                                       C1
                                            35
                                                                               A 9
                                                                                    58
                                                                                             FE
                 EE
                      A 9
                          OD
                                   1 C
                                                 C218:
                                                         DO
                                                              16
                                                                  20
                                                                       8D
                                                                           C2
                                                                                        8D
CO48:
        18
                                                                                    47
                      FO
                              CE
                                       C1
                                            86
                                                 C220:
                                                              C1
                                                                  20
                                                                           C1
                                                                                        C1
                                                                                             30
C050:
        AD
             1 A
                 C1
                          11
                                   1 A
                                                         48
                                                                       6 D
                                                                                AD
             CIC
                 BD
                      77
                          CO
                              9 D
                                   C1
                                       34
                                            84
                                                 C228:
                                                         DO
                                                              E1
                                                                  20
                                                                       8F
                                                                           C1
                                                                                CE
                                                                                    19
                                                                                        C2
                                                                                             E6
C058:
        A 2
                                            F9
                                                                                             F8
                          F5
                              60
                                   A2
                                       00
                                                                  C2
                                                                               DO
C060:
        E8
             EO
                 06
                      DO
                                                 C230:
                                                         AD
                                                              DA
                                                                       C9
                                                                           7 D
             7 D
                 CO
                      9 D
                          C1
                              34
                                   E8
                                       EO
                                            C1
                                                 C238:
                                                         8D
                                                              C2
                                                                  A 9
                                                                       58
                                                                           8D
                                                                               48
                                                                                    C1
                                                                                        20
                                                                                             42
C068:
        BD
                                                                                        20
                 F5
                      EE
                              C1
                                   60
                                       08
                                            70
                                                 C240:
                                                         4B
                                                              C1
                                                                  AD
                                                                       47
                                                                           C1
                                                                                DO
                                                                                    C4
                                                                                             B9
C070:
        06
             DO
                          1 A
                          20
                                       BC
                                            F4
                                                              C1
                                                                  EE
                                                                      119
                                                                                             CE
             3E
                 BC
                      02
                               20
                                   02
                                                 C248:
                                                         8F
                                                                           C2
                                                                                AD
                                                                                    ()A
                                                                                        C2
        80
                                            94
        3E
             80
                     10
                          12
                              05
                                   13
                                       13
                                                 C250:
                                                         C9
                                                              7 B
                                                                  DO
                                                                       16
                                                                           20
                                                                                AO
                                                                                        A 9
                                                                                             A 9
C080:
                 08
                              20
                                            23
                                                 C258:
                                                              8D
                                                                  48
                                                                       C1
                                                                           20
                                                                                6 D
                                                                                    C1
                                                                                             ED
         20
                      12
                          05
                                   20
                                       14
                                                         01
                                                                                        AD
C088:
             06
                 19
                                   20
                                       19
                                            2F
                                                                           20
C090:
        OF
             20
                 10
                     C
                          01
                              1
                                9
                                                 C260:
                                                         47
                                                              C1
                                                                  DO
                                                                       23
                                                                               8F
                                                                                    C1
                                                                                        CE
                                                                                             9 D
             15
                 20
                      08
                              16
                                   05
                                       20
                                            21
                                                 C268:
                                                         08
                                                              C2
                                                                  AD
                                                                           C2
                                                                                C9
                                                                                    77
                                                                                        DO
                                                                                             BF
                          01
                                                                       OA
C098:
        OF
                                       21
                                            F6
                                                              20
                                                                           A 9
                                                                               01
                                                                                    8D
                                                                                        48
                                                                                             8 A
        05
             13
                 03
                     01
                          10
                              05
                                   04
                                                 C270:
                                                         16
                                                                  AD
                                                                       C2
COAO:
                                            3F
                                                 C278:
                                                         C1
                                                              20
                                                                  4B
                                                                                47
                                                                                    C1
                                                                                             EE
COA8:
         20
             20
                 03
                      1
                       2
                          19
                              1
                                3
                                   14
                                       01
                                                                       C1
                                                                           AD
                                                                                        DO
                 15
                      13
                          20
                              012
                                   OF
                                       02
                                            24
                                                 C280:
                                                         06
                                                              20
                                                                  8F
                                                                       C1
                                                                           EE
                                                                               08
                                                                                    C2
                                                                                        A9
                                                                                             5 B
COBO:
        OC
             OC
                                       05
                                                                           60
                                                                                AD
                                                                                    F8
                                                                                             FO
         20
             02
                 OC
                      01
                          03
                              OB
                                   OD
                                            08
                                                 C288:
                                                         (1)()
                                                              8D
                                                                       C2
                                                                                        07
COB8:
                      C2
                          C9
                               3D
                                       04
                                            28
                                                 C290:
                                                         C9
                                                              E2
                                                                  DO
                                                                       06
                                                                           A9
                                                                                E3
                                                                                    8D
                                                                                        F8
                                                                                             28
         12
             AD
                 09
                                   DO
COCO:
                                            3 A
                                                                                             7 A
                                       C9
                                                              60
                                                                  A 9
                                                                       E 2
                                                                           8D
                                                                                F8
                                                                                    07
                                                                                        60
         EE
                 C1
                      60
                          AD
                              09
                                   C2
                                                 C298:
                                                         07
COC8:
             1 D
                 03
                                       A2
                                            78
                                                              F8
                                                                  117
                                                                       C9
                                                                           EO
                                                                                DO
                                                                                    06
                                                                                        A 9
                                                                                             79
             DO
                      EE
                          1 D
                              C1
                                   60
                                                 C2AO:
                                                         AD
        03
                          9 D
                                       BD
                                                 C2A8:
                                                         E1
                                                              8D
                                                                  F8
                                                                       07
                                                                           60
                                                                                A9
                                                                                    EO
                                                                                        8D
                                                                                             90
COD8:
        111
             BD
                 83
                      CO
                               DA
                                   06
                                            17
                                       13
                                                                       20
                                                                           39
                                                                                             F3
        96
             CO
                 9 D
                          04
                               E8
                                   EO
                                            61
                                                 C2BO:
                                                         F8
                                                              07
                                                                  60
                                                                                CO
                                                                                    AD
                                                                                        1 B
COEO:
                      AA
                          C2
                                       C3
                                                 C2B8:
                                                         D4
                                                              C9
                                                                  CO
                                                                       90
                                                                           05
                                                                                A 2
                                                                                    03
                                                                                        4C
                                                                                             9F
COE8:
         DO
             EF
                 20
                      8D
                               20
                                   10
                                            OE
                                       22
             39
                 CO
                      20
                          9C
                               C1
                                   EE
                                            9 A
                                                 C2CO:
                                                         D6
                                                              C2
                                                                  C9
                                                                       80
                                                                           90
                                                                                05
                                                                                    A 2
                                                                                        02
                                                                                             DE
         20
                          C9
                                   DO
                                       EA
                                            49
                                                                  C2
                                                                       C9
                                                                           40
                                                                                90
                                                                                             FO
             AD
                 (1)()
                      DC
                               6F
                                                 C2C8:
                                                         4C
                                                              D6
                                                                                    05
                                                                                        A 2
COF8:
         DO
                          C3
                               20
                                       C3
                                            FE
                                                 C2D0:
                                                         01
                                                              4C
                                                                       C2
                                                                           A 2
                                                                                (1(1)
                                                                                    BD
                                                                                        FE
                                                                                             17
C100:
         A 9
             01
                 8D
                      OF
                                   10
                                                                  D6
C108:
         A 2
             00
                 A 9
                      AD
                          9 D
                               DA
                                   06
                                       9D
                                            11
                                                 C2D8:
                                                         C2
                                                              8D
                                                                  F3
                                                                       C2
                                                                           BD
                                                                                06
                                                                                    C3
                                                                                        8D
                                                                                             F4
                      EO
                          13
                                   F5
                                       4C
                                            AE
                                                         F4
                                                              C2
                                                                  BD
                                                                       02
                                                                           C3
                                                                                8D
                                                                                    F6
                                                                                        C2
                                                                                             63
        AA
             04
                 E8
                               DO
                                                 C2E0:
                                   A 2
                                                 C2E8:
                                       00
                                            7 E
                                                                   C3
                                                                           F7
                                                                                C2
                                                                                    A 2
                                                                                             5F
        03
             CO
                 50
                      00
                          00
                               (1)()
                                                          BD
                                                              OA
                                                                       8D
                                                                                        00
C118:
                          43
                                       OB
                                                              20
             D6
                 6 B
                      DD
                               C1
                                   FO
                                            EE
                                                 C2FO:
                                                         A 9
                                                                  9 D
                                                                       00
                                                                           60
                                                                                9 D
                                                                                    (1()
                                                                                        60
                                                                                             B6
C120:
         AD
                      DO
                          F3
                               A9
                                        8D
                                            F2
                                                          E8
                                                              EO
                                                                  02
                                                                       DO
                                                                           F5
                                                                                60
                                                                                    3A
                                                                                        6C
                                                                                             92
C128:
         E8
             EO
                 04
                                   01
                                                 C2F8:
C130:
         47
             C1
                 60
                      BD
                          43
                               C1
                                   C9
                                        98
                                            BE
                                                 C300:
                                                          BA
                                                              EC
                                                                   3F
                                                                       28
                                                                           A3
                                                                                90
                                                                                    65
                                                                                        65
                                                                                             OE
             03
                      49
                          C1
                               A 9
                                   ()()
                                        8D
                                            3D
                                                 C308:
                                                          75
                                                              75
                                                                   77
                                                                       77
                                                                           63
                                                                                63
                                                                                        nn
                                                                                             A8
C138:
         DO
                 EE
                                                                                    nn
                                                                           29
                                                                                        C3
                      20
                          9 A
                               8E
                                   98
                                       55
                                            8 B
                                                 C310:
                                                          AD
                                                              OF
                                                                  C3
                                                                       DO
                                                                                EE
                                                                                    OF
                                                                                             4C
C140:
         47
             C1
                 60
                                        21
                                            55
                                                                           7 D
                                                                                C4
                                                                                    8D
                                                                                             26
                          EE
                               C1
                                   8D
                                                 C318:
                                                          AE
                                                              OE
                                                                  C3
                                                                       BD
                                                                                        nn
C148:
             (11)
                 (1)
                      AD
         (11)
                                            90
                                                 C320:
                                                          D4
                                                              BD
                                                                   BD
                                                                       C4
                                                                           8D
                                                                                    D4
                                                                                         BD
                                                                                             56
C150:
         C1
             AD
                 EF
                      C1
                          8D
                               22
                                   C1
                                        AD
                                        21
                                            79
                                                                                             15
C158:
         21
             C1
                  18
                      6 D
                          48
                               C1
                                   8D
                                                 C328:
                                                          FD
                                                              C4
                                                                   8D
                                                                       07
                                                                           D4
                                                                                BD
                                                                                    3D
                                                                                        C5
        C1
             BO
                 03
                      4C
                          69
                               C1
                                   EE
                                        22
                                            5 E
                                                 C330:
                                                          8D
                                                              08
                                                                   D4
                                                                       A 9
                                                                           41
                                                                                8D
                                                                                    04
                                                                                        D4
                                                                                             EB
C160:
                                   EE
                                        C1
                                            E8
                                                          A 9
                                                              21
                                                                   8D
                                                                       OB
                                                                           D4
                                                                                60
                                                                                    CE
                                                                                        OF
                                                                                             AE
                  1 E
                      C1
                                                 C338:
         C1
             20
                          60
                               AD
             21
                               C1
                                   8D
                                        22
                                            EF
                                                         C3
                                                                       8D
                                                                           04
                                                                                D4
                                                                                    A9
                                                                                         20
                                                                                             1 E
         8D
                  C1
                      AD
                          EF
                                                 C340:
                                                              A9
                                                                   40
C170:
                  21
                          38
                               ED
                                   48
                                        C1
                                            FA
                                                                       EE
                                                                                C3
                                                                                             32
         C1
             AD
                      C1
                                                 C348:
                                                          8D
                                                                   D4
                                                                           OE
                                                                                    AD
                                                                                        OE
C178:
                                                              OB
```

C180:

C188:

C190:

C198:

8D

CE

21

8D

21

22

C1

EF

C1

C1

8D

C1

03

1 E

C1

AD

90

20

EE

60

4C

C1

AD

08

8B

60

22

C2

C1

AD

C1

85

1 E

49

43

36

C9 40 D0 05 A9 00 8D 2 B C520: 47 68 68 68 68 47 47 47 DE C350: C3 C528: 47 68 68 68 68 47 47 47 E6 C358: 0E C3 60 A 2 (1) 8A 9 D ()() 55 DO F8 A2 OO CE C530: 47 61 61 OC OC 47 47 68 49 38 E8 EO (1() C360: C4 9D 00 38 BD 26 AD C538: 68 47 47 47 47 06 06 09 D2 BD 19 C368: 9 D 06 06 09 09 06 06 06 79 43 C4 C540: 19 C370: C4 9 D 40 38 BD AE 19 09 38 BD 60 C4 9 D CO 38 AA C548: 06 07 07 06 06 19 83 C378: 80 EO C550: 19 06 06 07 07 05 05 07 84 1 D DO E3 A 2 00 BD 7C C380: E8 2B C558: 07 19 19 09 09 06 06 06 95 C388: DE C3 9D 00 DO E8 EO 8E 06 09 19 09 19 06 06 9 B 09 C2 8 D 05 C560: 05 C390: DO F5 A9 1 D 8D 09 09 09 09 06 06 A9 25 C568: 05 06 A3 C398: 08 C2 A9 EO 8D F8 07 00 8D 4A C1 8D 1 D C1 8D 34 C570: 06 08 08 07 07 06 06 09 A9 C3AO: 2F 8D C578: 19 06 06 06 06 AD OE DC 32 8D 49 C1 BO C3A8: 47 C1 A 9 29 FE 8D OE DC A 5 01 29 FO C3BO: EE C1 A9 6C 8D EF C1 A2 59 C580: A2 E8 5 B C588: FB 85 01 ()() BD (1) DO 3C C3B8: ()() BD C5 C3 9D 00 D4 EO 19 DO F5 60 00 00 00 E1 C590: 9D 00 30 E8 E0 00 DO F5 EE C3CO: C598: EE 8F C5 92 C5 92 C3C8: 08 40 09 19 00 00 (1)() 00 23 EE AD 64 C3D0: 20 09 59 80 80 00 nn 80 D4 C5A0: C5 C9 37 DO E6 A9 30 8D 86 00 00 8F AF 89 22 A9 DO 8D 8F C5 A 5 04 C3D8: 80 00 00 C5A8: 92 C5 C5B0: 01 00 00 00 00 00 00 00 00 EO 19 04 85 01 AD OE DC DD C3E0: 00 00 00 00 00 00 (11) 1B 04 8D C3E8: C5B8: 09 01 OE DC A2 nn BD 9 B C3F0: 00 00 00 01 D8 00 1D (1() E7 C5 9 D 34 E8 EO C6 C5CO: CB ()() D8 C3F8: 00 01 01 CIC 00 00 (1)() 09 04 C5C8: D0 F5 60 AA AA 45 AA AA AA C400: 00 07 01 05 00 07 (1)() 07 1 B C5DO: AA AA 99 A5 9 D BC AA 69 A 5 C408: 07 (11) ()() 08 (1) nn 08 1F 01 01 06 06 1 A 99 (11) C5D8: 9D 7 D 7D C410: 00 00 00 00 00 04 00 nn 14 C5E0: 1A 66 69 FD FD FD FD FD CO C5E8: FD F4 DO 99 C418: 37 00 00 04 00 00 11 (1() 64 FD FD FD FD F4 (1)() 40 40 ()() CO CO 08 (1)() 2A C5FO: DO 40 40 40 40 90 90 A4 88 C420: C5F8: A4 99 69 5A 5A C428: 00 08 00 ()() 00 00 (1)() 34 64 69 66 76 9B 7 F C600: 76 7 D 7 D 7 F 7 F 7F 7F EE C430: 00 00 04 00 00 04 00 (1)() 38 C438: 04 00 00 14 00 00 30 C608: 7F 7F 7 F 7 D 7 D 1D 1D 05 CO 00 8C C610: 05 01 01 FF FF FF FF FF 17 C440: 00 ()() nn (1() 00 (1)(1) 08 (1) 48 FF FF 55 C448: 00 08 ()() 00 00 00 ()() 04 54 C618: FF 6A 6A 6A 6 A 17 6A 55 A9 A9 A9 A9 5 B 37 00 00 05 00 80 C620: 6A 6A C450: 00 00 (1) C628: A9 A9 A9 FD FD F6 F6 11 00 00 13 00 00 30 DA E9 C458: nn AC C630: DA 66 69 55 AA AA AA DA C460: 00 00 00 08 00 00 08 CICI 70 AA C468: 00 00 00 00 04 00 ()() 37 A3 C638: AA AA AA 55 AA AA AA AA 38 C470: 00 00 04 00 00 11 00 85 C640: AA AA 55 AA AA AA AA A 9 3F ()() 31 C648: A6 9A 6A 69 66 DA F6 70 C478: 00 ()() 03 (1() 1 E 1 E 60 49 DA C480: D1 1 E 1E 60 D1 8F 18 D2 3 B C650: F6 FD FD 69 99 A7 A7 9F 35 7 F FD FD F6 F6 C488: D1 C3 D2 18 D1 8F 8F DA D4 C658: 9F 7F DA BB 8F C490: 68 8F D2 18 DA 8F 18 85 C660: DA 6A 6A 7F 7F 9F 9F A7 F5 C498: C3 D1 18 68 68 D1 68 D2 24 C668: A7 A9 A9 6A 6A 9A 9A A6 14 C3 68 18 C3 68 8F 45 C670: A6 A9 A9 FD FD 3D 3D OD ED C4AO: D1 D2 C4A8: D2 18 60 D1 C3 D2 D1 1E 4C C678: 0D 01 01 FF FF 55 F7 F7 CC C4B0: D2 C3 C680: F7 55 FF DF DF 55 FF FF 1F 18 C3 D2 D1 68 4F E 2 19 55 C4B8: DA 8F D2 8F 8F 19 16 5D C688: FF DF (1) 08 80 3E BC 41 00 00 C4C0: 12 19 19 16 12 OC OE OF 56 C690: 02 20 20 02 BC 3E CF OF 12 C698: 80 08 00 00 00 (1) ()() C4C8: 12 10 OE OC OC OB 3D 32 C4D0: 09 OC OF OE OB DA OC OE 00 00 A9 9E 20 D2 FF C6AO: ()() DB 12 OE 19 09 12 19 OF 46 C4D8: 11 C6A8: A9 93 20 D2 FF A 2 nn BD 39 09 OE 10 OF 09 OC 4 E C4E0: 12 10 C6B0: A9 CO 9D C5 05 BD **B**5 CO **B7** C4E8: OF OE 16 12 10 OF 12 19 78 65 06 E8 EO OC DO EF 58 C6B8: 9D C4FO: OF 10 15 OE 10 OF 12 09 6D C6C0: A9 02 8D 1 A 06 A9 19 8D 6A OC OF OC OC 47 47 68 2 E C4F8: OB 06 AO 00 39 CO **C8** 6D C6C8: 1B 20 68 68 47 47 9D C500: 68 47 47 47 C6DO: CO 19 DO F8 60 20 A3 C6 5F C508: 47 OC OC 68 68 47 47 68 2F C6D8: A9 81 20 D2 FF A9 93 20 54 47 E9 47 75 C510: 68 47 E9 47 OC C6E0: D2 FF A2 (11) A9 AG 9 D 00 3E C518: OC 68 68 68 68 47 47 47 9B C6E8: 04 9D 00 05 9D 00 06 9D D0

```
C6F0: E8 06 E8 E0 00
                         DO EF
                                A2
                                         C8C0: E0 04 D0 F5
                                                               EE 8E C9
                                                                           AD
                                    OD
                                     3 B
                                                8E
C6F8:
       00 A9
              03
                  9D
                     A8
                         D8
                                 D8
                                         C8C8:
                                                    C9
                                                        C9
                                                           OF
                                                                DO
                                                                   DA
                                                                       8D
       DA
          E8
              EO
                  17
                      DO
                         F5
                                     25
                                         C8D0: C9
                                                    AE
                                                        8E
                                                            C9
                                                                       C9
C700:
                             A 2
                                 (1)()
                                                                BD
                                                                   44
                                                                           8D
                                                            67
       A 9
          03
              9 D
                  DO
                      D8
                         9 D
                             E6
                                 D8
                                     59
                                         C8D8:
                                                 E5
                                                    C8
                                                        BD
                                                               C9
                                                                   8D
                                                                       E6
                                                                           C8
       9 D
          98
              D9
                                         C8E0: A2
                  9 D
                     AE
                         D9
                             9 D
                                                    00
                                                        A9
                                                           9 A
                                                               9 D
                                                                  (11)
C718: DA
          9 D
              26 DA
                     18
                         8A
                            69
                                 28
                                    C5
                                         C8E8:
                                                EO
                                                    02 DO
                                                           F8
                                                               EE
                                                                       C9
                                                                  8E
          E0 C8
                      E3
                         A2
                                    75
C720: AA
                  DO
                             00
                                 A9
                                         C8F0: 8E
                                                    C9
                                                        C9
                                                            23
                                                                DO
                                                                   DB
                                                                       A9
C728:
       OE
          9D
              D1
                  D8
                      9 D
                         F9
                             D8
                                 9D
                                     8C
                                         C8F8: 8D
                                                    8E
                                                       C9
                                                            8D
                                                                8F
                                                                   C9
                                                                       AE
                                                                           8E
       21
          D9
              9 D
                  49
                     D9
                         9 D
                                         C900: C9
                                                    BD
                                                        3E
                                                           C9
                                                                8D
                                                                   17
                                                                           18
C738:
       9 D
          99
              D9
                  9 D
                     C1
                         D9
                             9 D
                                 E9
                                    OA
                                         C908:
                                                 BD
                                                    38 C9
                                                            6 D
                                                                8F
                                                                   C9
                                                                       8D
                                                                           16
       D9
          9 D
              11
                  DA
                      9 D
C740:
                         39
                             DA
                                 9 D
                                     F2
                                         C910:
                                                C9
                                                    A2
                                                       00
                                                            A9
                                                                98
                                                                   8D
                                                                       (1()
                                                                           60
C748:
       61
          DA
              9 D
                  89
                      DA
                         9D
                             B1
                                 DA
                                    BO
                                         C918:
                                                18
                                                    AD.
                                                       8F
                                                           C9
                                                                69
                                                                   OA
       E8
          EO
              15
                 DO
                     D4
                         A2
                             00
                                         C920: C9
                                                    AD 8F
                                                           C9
                                                               C9
                                                                   3C
                                                                       DO
                                                                          D6
       20 9D
             00 60 E8
C758:
                         EO 00 DO
                                         C928: A9
                                                    00 8D
                                                           8F
                                                               C9
                                                                       8E
                                                                   EE
                                                                          C9
C760:
       F6
          EE
              5 B
                 C.7
                      AD
                         5 B
                             C.7
                                 C9
                                    04
                                         C930: AD
                                                    8E
                                                       C9
                                                            C9
                                                               06
                                                                  DO
                                                                       C7
                                                                           60
          DO
C768: 80
              EA
                  A9
                      60
                         8D
                             5 B
                                 C7
                                         C938: 42
                                                    02
                                                        C2
                                                           82
                                                               42
                                                                  02
                                                                       66
C770:
       A 2
          00
              AO
                  96
                     98
                         9 D
                             7 A
                                 63
                                    5E
                                         C940: 6B
                                                    6E
                                                        71
                                                           74
                                                               46
                                                                   50
                                                                       64
                                                                           6E
C778:
       9 D
          12
              77
                  C8
                     CO
                         98
                             DO
                                 02
                                    94
                                         C948:
                                                 10
                                                    1 A
                                                        C6
                                                           EE
                                                               90
                                                                   AE
                                                                       46
                                                                           50
C780:
       AG
          96
              E8
                  EO
                     44
                         DO
                             ED
                                 A9
                                     2 E
                                         C950:
                                                 64
                                                    06
                                                        24
                                                           FA
                                                               18
                                                                   22
                                                                       2C
                                                                          BA
C788: 00 8D
              8E
                  C9
                         96
                             98
                                         C958:
                                                C4
                                                       D8
                     AG
                                                    CE
                                                           E2
                                                                7 A
                                                                   98
                                                                       2C
C790: 7A 63 8D
                  BD
                                    3F
                                         C960:
                                                 58
                                                    62 6C
                                                                   22
                     63
                         C8
                             CO 98
                                                           04
                                                               OE
                                                                          66
C798:
       DO
          02
              AG
                  96
                      18
                         AD
                             90
                                 C7
                                    CO
                                         C968:
                                                 66
                                                    66
                                                        66
                                                            69
                                                                69
                                                                   6 B
                                                                       6 B
                                                                          6E
C7A0:
       69
          58
              8D
                  90
                     C7
                         BO
                             03
                                 4C
                                         C970:
                                                6E
                                                    71
                                                        71
                                                            71
                                                               74
                                                                   74
                                                                       67
                                                                          68
              EE
                                 93
                                    BF
                                         C978:
                                                68
                                                    68
C7A8:
       AD
          C7
                  91
                      C7
                         18
                             AD
                                                        6A
                                                            6A
                                                                6A
                                                                   6A
                                                                       6A
                                                                          6 D
                     93
C7BO:
       C7
          69
              58
                  8D
                         C.7
                                03
                                    D6
                                         C980:
                                                 6 D
                                                    70
                                                        70
                                                            70
                                                                       73
                             BO
                                                                70
                                                                   70
                                                                           73
C7B8:
       4C
          BE
              C7
                  EE
                     94
                                     54
                         C.7
                             EE
                                 8E
                                         C988:
                                                 73
                                                    73
                                                        9A
                                                            8E
                                                               8E
                                                                   9 A
                                                                       nn
                                                                          (11)
              8E C9
                     C9
C7CO:
       C9
          AD
                         39
                             DO
                                    2 B
                                         C990:
                                                CIC
                                                    50
                                                        DE
                                                           E8
                                                               F2
                                                                   FC
C7C8: A9
          63
              8D 91
                     C7
                         8D
                            94
                                C7
                                                9E
                                                            BC
                                                                       5E
                                    A6
                                         C998:
                                                    A8
                                                        B2
                                                               C6
                                                                   DO
                                                                          68
       A9
          7 A
              8D
                     C7
                                                 72
C7D0:
                 90
                         A9
                             BD
                                 8D
                                    CF
                                         C9AO:
                                                    7C
                                                        86
                                                            90
                                                               1E
                                                                   28
C7D8:
       93
          C7
              A9
                 50
                     8D
                         8E
                             C9
                                 8D
                                     51
                                         C9A8:
                                                46
                                                    50
                                                           E8
                                                       DE
                                                               F2
                                                                   FC
       8F
              8D
          C9
                 90
                     C9
                         8D
                             91
                                 C9
                                         C9BO:
                                                9E
                                                    A8
                                                        B2
                                                           BC
                                                               C6
                                                                   DO
                                                                       64
                                                                          64
C7E8:
       AE
          8E
              C9
                  BD
                     B6
                         C9
                             8D
                                 OB
                                    C6
                                         C9B8:
                                                64
                                                    64 65
                                                           65
                                                               67
                                                                   67
                                                                       67
                                                                          67
                                                                              E9
C7FO:
       C8
          18
              BD
                  92
                     C9
                         6 D
                             8F
                                 C9
                                    B2
                                         C9CO:
                                                67
                                                    67
                                                        6 A
                                                           6A
                                                               6A
                                                                   6A
                                                                       6A
                                                                          6A
                                    25
                                                6 D
C7F8: 8D
          OA
              C8 B0
                     03
                         4C
                            03
                                         C9C8:
                                                    6D
                                                        6 D
                                                            6 D
                                                               6 D
C800: EE
          OB
              C8
                 AE
                     90
                         C9
                             BD
                                DA
                                    64
                                         C9D0:
                                                6F
                                                    6F
                                                       70
                                                           70
                                                               72
                                                                  72
                                                                       72
                                                                          72
                                                    72
C898: C9
          8D
                     18
             00
                  60
                         AD
                             OA
                                 C8
                                    58
                                         C9D8:
                                                72
                                                        20
                                                            20
                                                               82
                                                                   8D
                                                                       8D
                                                                          8D
C810: 69
          58
              8D OA
                     C8
                         BO
                             03
                                 4C
                                    32
                                         C9E0: 86
                                                    88
                                                       88
                                                            82
                                                                80
                                                                   81
                                                                       84
                                                                           85
              EE OB
                         EE
C818: 1D
          C8
                     C8
                             90
                                 C9
                                    OA
                                         C9E8:
                                                 80
                                                    86
                                                       8E
                                                           80
                                                                81
                                                                   84
                                                                       20
C820: EE
          91
              C9
                  AD
                     91
                         C9
                             C9
                                 08
                                    45
                                         C9FO:
                                                 85
                                                    80
                                                        8D
                                                           81
                                                                84
                                                                   20
                                                                       20
                                                                           20 EA
C828:
       DO
          D9
              A9
                      8D
                                 EE
                  00
                         91
                             C9
                                     54
                                         C9F8:
                                                 20
                                                    85
                                                        8E
                                                            83
                                                                       20
                                                                20
                                                                   20
                                                                           20
C830: 8F
          C9
              AD
                  8F
                      C9
                         C9
                                 DO
                                     35
                             OA
                                         CAOO:
                                                 20
                                                    20
                                                        8E
                                                           83
                                                                   20
                                                                       20
                                                                20
                                                                           20 D2
C838: AF
          A 9
              00 8D
                     8F
                         C9
                            8D
                                 90
                                         CAO8:
                                                 20 20
                                                       8D
                                                           86
                                                               88
                                                                  20
                                                                       20
                                                                           20 45
C840: C9
          8D
              91 C9
                     EE
                         8E C9
                                 AD
                                    E7
                                                 20 82
                                                        8E
                                         CA10:
                                                           80
                                                                86
                                                                   88
                                                                       20
                                                                           20
C848: 8E
          C9
              C9
                  24
                     DO
                         9A
                             A 9
                                 nn
                                     A3
                                         CA18: 82
                                                    80
                                                        84
                                                            85
                                                                80
                                                                   86
                                                                       88
                                                                           82
C850: 8D
          8E
              C9
                  AE
                      8E
                         C9
                             BD
                                 92
                                                80
                                                        20
                                         CA20:
                                                    81
                                                            20
                                                               85
                                                                   8D
C858: C9
          8D
              68
                  C8
                      BD
                         B6
                             C9
                                         CA28:
                                                81
                                                    84 20
                                                           20
                                                               82
                                                                   8D
                                                                       8E
                                                                          8E
C860:
       69
          C8
              A2
                  (1)()
                     BD
                         2A
                             CA
                                 9D
                                    85
                                         CA30:
                                                8D
                                                    85
                                                        20
                                                            20
                                                                20
                                                                       86
                                                                   88
                                                                          8D
C868:
       99
          60
              E8
                  EO
                     OA
                         DO
                             F5
                                 EE
                                     52
                                         CA38: 8E
                                                    8E 8D
                                                           81
                                                               84
                                                                  20
                                                                       20
                                                                           20 49
C870: 8E C9
              AD 8E
                     C9
                         C9
                             06
                                DO
                                    6F
                                         CA40: 88 83 83 83 84 20 20 9B
C878:
       DA
          A 9
              00
                  8D
                     8E
                         C9
                             A2
                                 nn
                                    85
                                         CA48: FF 48
C880: AC
          8E
                      34
              C9
                  B9
                         CA
                             9D
                                 5E
                                    3 A
                                           All the programs in this
C888:
       75
          B9
              3E
                  CA
                     9 D
                                     79
                         B6
                             75
                                 EE
C890: 8E
          C9
              AD 8E
                     C9
                         C9
                            OA
                                 DO
                                    93
```

C898:

C8A0:

C8A8:

C8B0: C8

05

3C

AE

A9

DO

8E

BD

00 8D

C8B8: 00 BD 8A C9 9D 00 60 E8

A9

BD

DD

C9

67 C9

8E

00

44

8D

C9 E8

8D

C9

BE C8

8E

8D

EO

C9

BD

A2

F6

1 B

C6

20

All the programs in this issue are available on disk. See page 37 for ordering information.

NO NEWS FROM PAGE 30

C-64 VERSION

•10 REM *** NO NEWS (64) *** BUCK CHILDRE	CA
SS *** •20 REM *** P.O. BOX 13575 SALEM, OR 9730	CA
9 ***	OA
·30 PRINTCHR\$(147)"LOADING AND CHECKING D	
ATA LINE:":J=53000	BN
TO TOND TOTAL THE TOTAL TH	MB
•50 IFB=0THENL=PEEK(64)*256+PEEK(63):PRIN TCHR\$(19)TAB(31)L:PRINT	PF
•60 IFA<00RA>255THEN80	FK
•70 POKEJ+B, A:X=X+A:D=D+1:NEXTB:READA:IFA	
=XTHEN90	PL
-80 PRINT"ERROR IN DATA LINE:"L:END	MG
•90 X=0:J=J+12:IFD<240THEN40	HP
•100 PRINT"THE DATA IS OK[3"."]":PRINT •110 PRINT"SYS 53[3"0"] TOGGLES ON AND OF	FB
F[3"."]":END	OD
·120 DATA169,79,32,210,255,160,207,204,3,	
3,240,19,1581	BA
·130 DATA173,2,3,174,3,3,141,251,207,142,	
252,207,1558	JA
•140 DATA169, 78, 162, 59, 76, 50, 207, 169, 70, 3 2, 210, 255, 1537	DG
•150 DATA174,251,207,172,252,207,142,2,3,	DU
140,3,3,1556	LA
•160 DATA76,210,255,32,96,165,134,122,132	
,123,32,115,1492	NK
•170 DATA0, 170, 240, 243, 162, 255, 134, 58, 176	TO
,3,76,156,1673 •180 DATA164,32,121,165,169,1,141,249,207	IO
,169,0,160,1578	LN
·190 DATA255,141,248,207,141,250,207,141,	
246,207,200,185,2428	PJ
·200 DATA0, 2, 240, 107, 201, 34, 208, 6, 77, 246,	T D
207,76,1404 •210 DATA99,207,174,246,207,208,235,201,1	LP
38,240,8,201,2164	NC
•220 DATA147, 240, 4, 201, 162, 208, 223, 165, 21	
4,141,247,207,2159	NJ
•230 DATA174, 247, 207, 160, 0, 24, 32, 240, 255,	
169,224,160,1892	PO
•240 DATA207,32,30,171,238,248,207,208,28,206,249,207,2031	LF
•250 DATA208, 23, 169, 20, 141, 249, 207, 169, 12	TI.
8,77,250,207,1848	НО
·260 DATA141,250,207,240,215,169,18,32,21	
0,255,76,140,1953	EJ
•270 DATA207,32,228,255,201,78,240,4,201,	TO
89,208,212,1955 •280 DATA32,210,255,201,78,208,3,76,116,1	JO
64,169,13,1525	JL

•290 DATA32,210,255,76,225,167,65,46,72,4 6,83,46,1323	ME
·300 DATA65,82,69,32,89,79,85,32,83,85,82	CD
·310 DATA63,32,40,89,47,78,41,146,32,0,0,	
	ED
C-128 VERSIO	N
•10 REM *** NO NEWS (128) *** BUCK CHILDR	
ESS *** •20 REM *** P.O. BOX 13575 SALEM, OR 9730	HJ
9 *** •30 PRINTCHR\$(147)"LOADING AND CHECKING D	OA
ATA LINE:":J=3072	BP
•40 FORB=OTO11:READA	MB
•50 IFB=OTHENL=PEEK(66)*256+PEEK(65):PRIN	
TCHR\$(19)TAB(31)L:PRINT	LB FK
•60 IFA<00RA>255THEN80 •70 POKEJ+B,A:X=X+A:D=D+1:NEXTB:READA:IFA	A
=XTHEN90	PL
·80 PRINT"ERROR IN DATA LINE: "L:END	MG
•90 X=0:J=J+12:IFD<264THEN40	MB
·100 PRINT"THE DATA IS OK[3"."]":PRINT	FB
•110 PRINT"SYS 3072 TOGGLES ON AND OFF[3" ."]":END	HN
•120 DATA169,0,141,0,255,169,79,32,210,25	1111
5,160,12,1482	HI
•130 DATA204,3,3,240,19,173,2,3,174,3,3,1 41,968	GJ
•140 DATA12,13,142,13,13,169,78,162,56,76,47,12,793	BD
·150 DATA169,70,32,210,255,174,12,13,172,	
13,13,142,1275 •160 DATA2,3,140,3,3,76,210,255,162,255,1	GM
34,60,1303	AG
•170 DATA32,147,79,134,61,132,62,32,128,3	AN
•180 DATA239,176,3,76,226,77,32,10,67,169	
,1,141,1217	НВ
•190 DATA10,13,169,0,160,255,141,9,13,141 ,11,13,935	НО
·200 DATA141,6,13,141,7,13,200,185,0,2,20	
8,3,919 •210 DATA76,220,77,201,34,208,6,77,6,13,7	NJ
6,96,1090	OI
•220 DATA12,174,6,13,208,232,201,138,240, 31,201,147,1603	BM
•230 DATA240, 27, 201, 162, 240, 23, 201, 240, 24	200.27
0,19,201,254,2048	NM
•240 DATA240, 209, 201, 17, 240, 4, 201, 27, 208, 201, 173, 7, 1728	DL
-250 DATA13,201,254,208,197,165,235,141,8	3
,13,174,8,1617	HE
•260 DATA13,160,0,24,32,240,255,32,129,14 6,65,82,1178	KE
0,00,00,111,0	

• 27

,30 ,28 ,29 0,0 ,30 69 •31 ,7 ,7 •32 ,2 •33

	·270 DATA69,32,89,79,85,32,83,85,82,69,63	C118:	8C	34	77	A9	FF	8 D	15	DO	6D
	,32,800 MJ	C120:	AO	04	A2	10			D4	E8	C7
	·280 DATA40,89,47,78,41,146,32,0,238,9,13	C128:	8E	04	D4	A2	OF	84	09		F4
1	,208,941 GO	C130:	8 D	01	D4	A9	02	20	89		AD
1	·290 DATA28,206,10,13,208,23,169,20,141,1	C138:	EE	27	DO	CA	10	EF	88	DO	43
1	0,13,169,1010 KN	C140:	E1	8C	00	D4	A9	05	8 D	01	CO
Ш	•300 DATA128,77,11,13,141,11,13,240,197,1 69,18,32,1050	C148:	D4	AD	8 D		DO	FB	E6	04	12
н	•310 DATA210,255,76,166,12,32,228,255,201	C150:	A5	04	29	3F	DO	03	EE	27	4C
а	,78,240,4,1757 EG	C158:	DO	29	OF	DO	03	20	EA	C1	02
я	•320 DATA201,89,208,212,32,210,255,201,78	C160:	20 F0	2B 05	C2 C6	20	91 4C	C4 7B	A5 C1	05	8F
1	,208,3,76,1773 NI	C170:	A 9	18	ED	83	C5	OA	85	38 05	EB FD
п	·330 DATA55,77,169,13,32,210,255,76,220,7	C178:	20	F3	C2	20	E3	C3	AD	84	49
п	7,0,0,1184 NO	C180:	C5	DO	C6	A2	06	BD	BO	C5	BA
н	DER ALERT	C188:	DO	BF	CA	10	F8	A 9	28		DE
я	RED ALERT	C190:	89	C4	AC	83	C5	C8	CO	15	73
а	FROM PAGE 60	C198:	BO	03	8C	83	C5	A 2	00	8E	53
я	Starting address in hex: C000	C1AO: C1A8:	15 24	DO BC	86 F0	02 C5	BD	87	C5	DO	EA
а	Ending address in hex: C865	C1BO:	77	99	49	77	A 9 8 A	45	99 A2	48 0A	02
п	SYS to start: 49152	C1B8:	20	23	C4	A 2	80	8E	OB	D4	52
в	Flankspeed required for entry! See page 79.	C1CO:	E8	8E	OB	D4	A9	14	20	89	7 F
п	2666 10 60 06 70 77 06	C1C8:	C4	68	AA	E6	02	E8	EO	06	59
в	C000: A9 08 20 D2 FF 20 1E C5 A8 C008: A9 93 20 D2 FF A0 00 98 71	C1DO:	90	D2	AD	C9	77	CD	85	C5	3C
в	2616 20 16 7	C1D8:	FO	03	EE	86	C5	A5	02	OD	BC
в	CO10: 99 40 71 C8 C0 C0 90 F8 2F C018: A9 08 8D 5C 71 8D 62 71 86	C1E0: C1E8:	86 B4	C5 C0	FO AD	03	4C DC	CC	CO 29	4C	47
п	CO20: A9 22 8D 5F 71 A9 18 8D 99	C1FO:	A8	18	AD	80	C5	79	E8	03 C5	BF CD
я	CO28: 9F 71 A9 3C 8D DF 71 AO 9E	C1F8:	C9	32	90	07	C9	B4	BO	03	BE
п	C030: 00 B9 66 C7 99 00 72 C8 EC	C200:	8D	80	C5	8 A	29	OC	4 A	4 A	28
в	C038: D0 F7 A0 18 B9 2C C6 99 FF	C208:	A8	18	AD	81	C5	79	E8	C5	E5
я	C040: 00 D4 88 10 F7 A9 00 8D DC	C210:	AA	AD	82	C5	79	EC	C5	DO	AD
я	C048: 20 D0 8D 21 D0 8D 15 D0 2C C050: 8D 1C D0 A9 C5 8D F8 77 38	C218:	07	EO	18	90	OD	4C	24	C2	E8
я	· · · · · · · · · · · · · · · ·	C220:	EO	29		06	8E	81	C5	8D	44
я	C058: A9 FF 8D 17 D0 8D 1B D0 F0 C060: 8D 1D D0 A9 F7 8D 48 77 CA	C228: C230:					DA		DO	47	37
н	C068: 8D 49 77 8D 6E 77 8D 6F 27	C238:	C9	20	FU	ניע	70	CO	22	29	
н	CO70: 77 A9 O8 8D 48 DB 8D 49 22	C240:						AO			16
п	CO78: DB 8D 6E DB 8D 6F DB AO A5	C248:								C6	
н	C080: 27 A9 A0 99 70 77 A9 EF OD	C250:					00		A2	C5	
8	C088: 99 98 77 A9 08 99 70 DB C9	C258:					A9		A 9	01	E7
в	C090: 99 98 DB 88 10 EB A2 14 D9 C098: A0 13 18 20 F0 FF A9 F6 16	C260:						C5			5C
н	CO98: AO 13 18 20 FO FF A9 F6 16 COAO: AO C6 20 1E AB A2 18 AO 4D	C268: C270:			C5					C5	
8	COA8: 02 18 20 FO FF A9 0B A0 29	C278:			B3			8E DA		A2 DO	AB
г	COBO: C7 20 1E AB 20 68 C4 A9 59	C280:						80		04	
ı	COB8: 01 8D 83 C5 20 3B C4 A2 53	C288:						A2		BD	
1	COCO: 05 A9 00 9D 87 C5 CA 10 35	C290:								C5	
1	COC8: FA 8D 86 C5 20 B8 C4 A9 E4	C298:	E9	09	DD						F8
	CODO: 9F 8D 81 C5 A9 8C 8D 80 89	C2AO:				BO		90			82
	COD8: C5 A9 OO 8D 82 C5 85 O5 A8 COEO: AO 5A 99 8D C5 88 10 FA 5C	C2A8:									DF
		C2B0:							38	A 5	
	COFO: C9 OA 90 O6 E9 OA E8 4C 84	C2B8: C2C0:	C5				A 5	03		A 2	
	COF8: FO CO 8E D6 77 O9 30 8D 4E	C2C8:						00		13	EA EA
	C100: D7 77 AD C9 77 8D 85 C5 17	C2D0:			02	FD	9 B			03	
	C108: AD 1B D4 29 07 09 10 8D 7C	C2D8:	FD	A 2	C5	90	12	FE	8D	C5	34
1	C110: 84 C5 A0 43 8C 33 77 C8 3E	C2EO:	A 9	00	9 D	DA	C5	8 A	48	AE	4 A
										AHO	11 8

odes rams!

,4 ME

82 CD

RSION

OA D BP MB

> LB FK

> PL MG MB

FB

HN

HI

GJ

BD

GM

AG

AN

HB

НО

NJ

OI

BM

NM

DL

HE

KE

DR HJ

C4B8: A2 05 86 02 BD 87 C5 FO E4 C5 20 23 C4 68 AA CA 18 C2E8: 83 DA C5 C6 C4CO: OF AD 86 C5 FO 1F CE 86 2F C2F0: D0 9 D 60 A2 06 BD 85 112 9 D A9 50 87 C5 AA C4C8: C5 C5 DO 05 AD **B**4 C2F8: D0 56 BD 8D A9 41 99 48 77 88 C4D0: BC FO C5 DO 03 4C 87 C3 CE 84 C300: 84 C5 68 C4D8: A9 42 99 49 77 A9 116 99 29 1F 119 41 C308: 84 C5 AD 1 B D4 99 CA 10 **D4** 73 C4E0: 48 DB 49 DB C310: 08 9 D BO C5 9 D 28 DO AO 63 DO 31 8D 04 D4 A 5 9E C4E8: A5 02 C318: 50 AD 1 B D4 C9 20 BO 01 51 02 A8 B9 45 24 C4F0: 02 OA 18 65 **C8** 9 D 9B C5 98 9D A2 C5 86 C320: 22 A2 EC A9 00 9 D EF C4F8: C6 FO 10 8E 04 D4 C328: A9 C7 9 D F9 77 35 C500: B9 46 C6 FO OD 8D 01 D4 28 1B D4 94 A9 C5 AD C330: C5 9 D D4 E8 8E A9 C508: B9 C6 8D 00 47 C338: 29 07 9D E1 C5 A8 B9 04 14 D4 1 D C510: 04 B9 45 C6 20 89 C4 99 C340: C6 85 FC **B9** OC C6 85 FD 60 OE 1E C348: B9 14 **C6** 85 FB 20 8E C3 DO C518: E6 02 4C EF C4 AD 2F 87 C520: DC 29 FE 8D OE DC A5 01 44 C350: 20 **B3** C3 FE DA C5 DO 29 FB 85 01 A9 DO 85 3 A OE C5 80 8C 04 D4 31 C528: C358: FE 8D AG 3C 84 39 72 C530: A9 78 85 AG 00 C360: C8 8C 04 D4 BC E1 C5 CO **B3** A 2 08 B1 39 91 3B 5A A 9 C538: 84 3 B C368: 06 90 OB 20 8D 33 77 OC 3C F9 CA E6 3 A E6 E2 C370: 8D A9 EB C540: C8 DO 34 77 4C 87 C3 01 C5 22 C548: D0 F2 A5 01 09 04 85 01 46 C378: 99 87 C5 **B9** FO A8 A9 C550: AD OE DC 09 01 8D OE DC 6B 99 C380: 45 99 48 77 49 77 CA 44 2F B9 36 C7 99 08 7 A FB C558: A0 C2 60 38 A5 BF C388: FO 03 4C F5 03 02 DD 09 8A A5 C560: 88 10 F7 AD C390: FC FD 9B C5 9D B7 C5 AD 00 DD 29 FC 87 C568: 8D 02 DD AD C398: FD FD A2 C5 9 D BE C5 9D BC 8D C570: 09 02 8 D 00 DD A9 DE FC C3A0: C5 A5 FB FD BO C5 7 A C5 38 88 02 60 F7 C578: 18 DO A9 74 8D 9D C3A8: 9D CC C5 A9 00 E9 COCO OA 00 00 00 00 (1() C580: 00 00 00 C5 7 D C3B0: D3 C5 60 18 BD 94 58 99 99 00 88 C588: 00 00 00 00 ()() B7 C5 9D 94 C5 BD 9 B C5 4D C3B8: 00 00 99 90 BD A2 22 C590: 00 (11) nn 00 nn 9D 9B C5 C3CO: 7 D BE C5 9 D 00 00 00 00 00 (1() 98 C598: 00 00 C3C8: C5 7 D C5 C5 A2 C5 18 **B**5 C5 C5AO: 00 00 00 00 99 00 00 (11) AG 7 D CC 9D A9 55 C3D0: BD A9 C5 00 00 C5A8: nn 00 00 00 (1)() 00 A8 C3D8: C5 C5 7 D D3 C5 9D 87 BD BO C5B0: 00 00 00 00 99 00 00 00 BO C3E0: B0 C5 60 A2 06 84 MA A8 9 D C5B8: 00 00 00 00 00 99 99 nn C5 99 03 DO BD 9 B E3 C3E8: BD BO 00 00 00 00 00 CIC CO 00 00 C3F0: C5 99 02 DO AD 10 DO 3D EE C5CO: (11) CIC On FO 81 C5C8: 00 00 00 00 99 C8 C3F8: FD A8 BD A 2 C5 05 C5 00 00 00 00 00 00 DO C5D0: 00 00 C400: 98 1 D F6 C5 A8 8C 10 DO 88 00 00 99 99 99 00 00 nn D8 8D 01 40 C5D8: C408: CA 10 DA AD 80 C5 (1) nn 00 99 00 00 nn 00 00 EO C5 8D DO E1 C5E0: C410: D0 AD 81 AD FF CO 00 CICI FF CIC E9 00 01 C5E8: C418: 10 D0 29 FE OD 82 C5 8D 04 22 02 69 04 08 OC 1 A 1 E 04 AG 04 38 **B9 C8** CO C5FO: C420: 10 DO 60 C5F8: 08 10 20 40 80 FD FB F7 E3 C428: 77 69 00 C9 3A 90 02 A9 49 28 C600: EF DF BF 7F 48 68 D8 CO 99 77 10 EF CA 8D C430: 30 C8 88 **C8** C608: F8 18 AG AG 00 00 00 ryry 5A B9 ED C438: DO E9 60 AG nn 77 C610: 00 01 CA 99 99 CA CA CA 3C FO 70 C440: D9 EO 77 05 BO OB 4C C3 06 CA CA C3 04 05 07 4 B C448: 5D C4 **C8** CO 06 90 EE 4C C5 C618: C620: 02 08 OA 19 **C8** C9 CA CB 66 C450: 5D C4 AG 05 **B9 C8** 77 99 AB 77 88 F7 05 A9 90 C628: CA C9 C8 C7 00 00 00 00 4D C458: EO 10 AG 00 1 A 09 3E 1E 90 00 ()() AF 5E C630: 30 99 C8 77 88 10 FA 60 C460: FF FF 00 99 80 nn DO C638: 10 08 C468: 02 A9 AG C6 20 75 EE 86 64 F1 28 **B6** 25 C640: 00 00 5A AF DA C470: 1 E AB A9 04 20 89 C4 AD 04 59 09 59 09 24 82 00 DC 29 10 DO EA AG BD A8 C648: 09 24 24 C478: 28 09 24 59 19 22 C650: 59 OA **B6** C480: A9 20 99 2B 74 88 DO FA D7 59 09 24 59 OC 28 **B6** 47 A2 3F C658: 24 65 A2 C5 DO FC C488: 60 18 20 20 E4 C660: 20 CO 00 00 13 11 C490: 60 A2 BD 8D C5 FO 1C **B7** 06 20 20 B2 CO C9 20 B2 CO 79 **B9** C668: C498: 4A 4 A 4 A 4A 4A A8 1C 8 A C670: 20 20 92 C4AO: C6 9D 28 DO B9 24 **C6** 9D 40 AE 20 B2 CO C9 D5 EB C678: C0 C9 20 B2 20 20 20 **B2** E8 C4A8: F9 77 FE 8D C5 DO 05 A9 C4BO: 00 9D BO C5 CA 10 DC 60 DC C680: CO AE 20 B2 CO C9 20 BO

23

20 AB

C840: C2 OC DE

A4 83

3F

00 04

C688: B2 AE

OD

20 20 20

```
CO
            C<sub>6</sub>
                20
                    AB
                        B3
                            20
                                20
                                   DD
                                       B5
                                             C848:
                                                    FD
                                                        BO
                                                            4 B
                                                                6E
                                                                    02
                                                                       01
                                                                            5A
                                                                               AG
 C698:
        20
            DD
                20
                    20
                        AB
                            CO
                                B3
                                    20
                                       17
                                            C850:
                                                        21
                                                            08
                                                    10
                                                                01
                                                                    00
                                                                       80
                                                                           08
                                                                               08
                                                                                   1B
 C6A9: DD
            20
                20
                    20
                        AB
                            B3
                                20
                                   20
                                       7 E
                                            C858:
                                                    10
                                                       00
                                                            nn
                                                                nn
                                                                   CIC
                                                                       42
                                                                           nn
                                                                               OO AA
 C6A8:
        AB
            CO
                C6
                    20
                        20
                            DD
                                OD
                                   20
                                       27
                                            C860:
                                                    00 00
                                                           00
                                                               00
                                                                   CO
                                                                       00
 C6B0:
        20
            20
                20
                    B1
                        20
                            B1
                                20
 C6B8: C0
            BD
                20
                    B1
                        CO
                            CB
                                   20 D5
                                                HAINMAIL:
                                20
C6C0: B1
            20
                B1
                    20
                        B1
                            CO
                                BD
                                   20
                                       B4
                                             FROM PAGE 70
C6C8:
        B1
            CO
                BD
                    20
                        B1
                            20
                                B1
                                       BC
C6D0:
        20
            B1
                OD
                    OD
                        20
                            20
                                       3D
        20 20
                20
                    50
                       52
                            45
                               53
                                   53
                                       C7
                                            ·10 FAST:COLOR.,1:COLOR4,12:COLOR1,12:GRA
C6E0:
        20
           46
                49
                    52
                        45
                            20
                               42
                                   55
                                       DF
                                             PHIC2,1,.:SLOW:PRINTCHR$(11)CHR$(142);
C6E8:
        54
            54
                4F
                    4 E
                        20
                            54
                               4F
                                   20
                                       13
                                            ·20 PRINT"[CLEAR][DOWN][BLUE][c A][3"[s C
C6FO:
       53 54
               41
                    52
                        54
                           nn
                               9E
                                   C3
                                       E2
                                             ]"][c S][c A][c S] [c A][c S][c A][s C][
C6F8: C4
           11
                9D
                    9D
                       9D
                            9D
                               9D
                                   81
                                       64
                                             s C][c S][c A][c S][c A][c S][3" "][c A]
C700: AF
            A 2
                12
                    B7
                        20
                            20
                               B7
                                   92
                                             [c S][c A][c S][c A][c S][c A][s C][s C]
C708:
       A2
            AF
                99
                    9A
                        53
                            43
                               4F
                                       2D
                                             [c S][c A][c S][c A][c S] [c A][c S]"
                                                                                        HD
        45
C710:
            20
                05
                    30
                       30
                            30
                               30
                                   30
                                       6 B
                                            ·30 PRINT"[s B][c A][s C][s C][c X][s B][
C718:
        30
            20
                20
                    20
                       9C
                           57
                                             s B] [3"[s B]"][c A][c S][4"[s B]"][c Z]
                               41
                                   56
                                       34
C720:
        45
            20
                05
                    30
                       31
                            20
                               20
                                             [s C][s C][c S][s B][c Z][c X][c Z][c X]
C728:
        1E
            48
                49
                    47
                       48
                           20
                                   30
                                       BC
                                             [s B][s B][c A][c S][5"[s B]"] [s B][s
C730:
        30
            30
                30
                    30
                       30
                           00
                               01
                                   13
                                       35
                                             B]"
                                                                                        EN
C738:
        37
            37
                7 F
                    7 F
                       FF
                           (11)
                               (11)
                                   CICI
                                       A5
                                            ·40 PRINT"[s B][s B][3" "][s B][c Z][s C]
C740:
        30
            F8
                FE
                   FE
                       FF
                           50
                               nn
                                             [c X][s B][s B][c Z][c X][4"[s B]"][c A]
        00
C748:
           (11)
                00
                   03
                       03
                           (1()
                              CO
                                   (1()
                                       4E
                                             [s C][c S][s B][s B][c A][c S][c A][c S]
C750:
        00
           00
                00
                   CO
                       CO
                           00
                               00
                                   00
                                       D1
                                             [s B][s B][c Z][c X][5"[s B]"]
                                                                              s Bls
C758:
        00
            nn
                nn
                               18
                   nn
                       FF
                           00
                                       88
                                            B]"
                                                                                        JN
C760:
        30
            EO
                EO
                   30
                       18
                                            ·50 PRINT"[s B][s B][3" "][s B][c A][s C
                           18
                                       B2
C768:
        nn
           CO
               00 00
                       CIC
                           nn
                               00
                                   00
                                       68
                                             [c S][s B][s B][c A][c S][5"[s B]"] [4"[
                                            s B]"][c Z][c X][3"[s B]"][c A][c S][5"[
C770: 00 00
               00 00
                       00
                           nn
                               nn
                                   nn
                                       70
C778: 00
           08
               CICI
                   nn
                       00
                           On
                                       22
                                            s B]"] [s B][s B]"
                                                                                        HM
C780: 00
           nn
               08
                                            ·60 PRINT"[s B][s B][3" "][s B][s B] [10"
                   nn
                       01
                           3C
                               80
                                   nn
                                       46
C788:
        10
           00
               00
                   85
                       00
                           00
                                             [s B]"] [4"[s B]"] [10"[s B]"] [c Z][c
                               10
                                   (1()
                                       2E
C790:
        00
           CIC
               (11)
                   (11)
                       (11)
                           (1()
                               (11)
                                   (1(1
                                       90
                                             X]"
                                                                                        GH
C798:
        CICI
                                            ·70 PRINT"[s B][c Z][s C][s C][c S][s B][
s B] [10"[s B]"] [4"[s B]"] [9"[s B]"][
           nn
               CIC
                  00
                       nn
                                       98
        00
           00
               00
                  (11)
                       (11)
                           nn
                              00
                                   00
                                       AO
C7A8:
       00
           00
               00
                   00
                       00
                           On
                               CICI
                                   nn
                                       A8
                                            c Z][s C][c S][c A][c S]"
                                                                                        IO
       On
           nn
               nn
                   04
                       nn
                                            ·80 PRINT"[c Z][3"[s C]"][c X][c Z][c X]
                           50
                               nn
                                   nn
                                       B4
C7B8: 01
           nn
               40
                  00
                       32
                                            [c Z][c X][c Z][c X][c Z][c X][c Z][c X]
                                   10
                                       3E
C7C0: 20
           (1()
               2E
                   nn
                       08
                           75
                               08
                                   02
                                       96
                                            [c Z][c X] [c Z][c X][c Z][c X] [c Z][c
           20
C7C8:
       8C
               00
                   63
                       nn
                           01
                               10
                                   40
                                       2A
                                             X][c Z][c X][c Z][c X][c Z][c X][c Z][s
C7DO:
       00
           (11)
               nn
                  00
                       04
                           00
                                      D4
                                             C][s C][c X][c Z][c X]"
                                                                                        OA
                                           .90 PRINT" [c 8][RVSON][sEP][c *][RVSOFF
       00
           00
               nn
                  00
                       90
                           nn
                              (1)
                                  00
                                      D8
C7E0:
       00
           00
               nn
                   00
                       00
                           (11)
                               (11)
                                            ]"SPC(31)"[RVSON][sEP][c *]"
                                   (11)
                                       EO
                                                                                        AO
       (11)
                       90
C7E8:
           nn
               (11)
                   rici
                           nn
                              nn
                                   nn
                                      E8
                                           •100 PRINT"
                                                         [RVSON][c M] [RVSOFF][3" "][
       04
           00
               00
                  (11)
                       00
                           02
                              (11)
                                   20
                                      17
                                            YELLOW] BY CLEVELAND M. BLAKEMORE[3" "][c
C7F8:
       nn
           63
               nn
                  04
                       32
                           10
                               nn
                                   4F
                                      F1
                                             8][RVSON][c M] "
                                                                                        EA
C800:
       00
           10
               D6
                   84
                       01
                           7F
                               60
                                  nn
                                      4C
                                           ·110 PRINT"
                                                         [RVSON][c M][SS][RVSOFF]"SPC
C808:
       5D
           CO
               05
                   1 A
                       10
                                            (31)"[RVSON][c M]
                           nn
                                      D6
                                                                                        NI
C810:
       02
           00
               20
                  nn
                       CICI
                          (1()
                              rin
                                  04
                                      36
                                           •120 PRINT"
                                                         [RVSON][c M][SS][RVSOFF]"SPC
C818:
       00
           00
              00
                   nn
                       00
                          nn
                              (11)
                                            (11)"[RED][3" "]1987"SPC(13)"[c 8][RVSON
                                  00
                                      18
C820:
       90
           nn
               nn
                   (11)
                       (11)
                                            ][c M] "
                          nn
                              00
                                  nn
                                      20
                                                                                        AK
C828:
       nn
           nn
               nn
                   00
                                           •130 PRINT"
                           42
                              OG
                                  On
                                      6A
                                                         [RVSON][c M][SS][RVSOFF]
       08
           00 08
                  90
                       10
                                            ELLOW][s U][25"[s C]"][s I] [c 8][RVSON
                          01
                              91
                                  80
                                      63
C838:
       10
           A6
              08
                   01
                       52 80
                              43
                                  35
                                            ][c M]
                                                                                        IL
```

·140 PRINT" [RVSON][c M][SS][RVSOFF] [Y		HAPEA\$,C,168,1:NEXT:COLOR1,3:CHAR1,7,24,	
ELLOW][s B][RED][s U][23"[s C]"][s I][YE		"[6" "]",1:COLOR1,6	LD
	NC	·310 CHAR1, 27, 24, "[6" "]", 1: GRAPHIC.	BK
·150 PRINT" [RVSON][c M][SS][RVSOFF] [Y		•320 CLR:DIM J,A,R(2),S(2),H(2),P,Z,X,D,Y	
ELLOW][s B][RED][s B][c 3][RVSON] A TWO		,B,F,O,T,H,V,LP,RP:P=8183:Y=15:O=1:T=2:H	- 1
PLAYER GAME FOR [RED][RVSOFF][s B][YELLO		=3:Z=1:X=8:D=45:B=75:F=5:SC=.:LP=64:RP=1	- 1
	KM		GG
·160 PRINT" [RVSON][c M][SS][RVSOFF] [Y		·330 DEFFNA(X)=JANDY:DEFFNR(J)=R(Z)+(A <f)< td=""><td></td></f)<>	
		*-O+(A>F)*O+(R(Z)=XANDA <f)*x+(r(z)=oand(z)< td=""><td>- 1</td></f)*x+(r(z)=oand(z)<>	- 1
ELLOW][s B][RED][s B][c 3][RVSON][6" "]T		A>F))*-X:DEFFNS(J)=B+R(Z)+S(Z)*X:DEFFNC(
HE C-128[8""][RED][RVSOFF][s B][YELLOW]	MD		EE
	NB	11) (0111,111)	DD
•170 PRINT" [RVSON][c M] [RVSOFF] [YELL		• 340 DEFFNU(P)=H(P)+(H(P) <d+t)*-t:deffni(< td=""><td></td></d+t)*-t:deffni(<>	
OW][s B][RED][s B]"SPC(23)"[s B][YELLOW]		A)=80+(A-0)*160+H(A):DEFFNP(J)=J+V+(J+V)	EC
	OG	.,,,	EC
•180 PRINT" [RVSON][c M] [RVSOFF] [YELL		•350 TEMPO 18:ENVELOPE 0,0,9,2,1,2,1536:P	
OW][s B][RED][s B] [c 3]LEFT=ROTATE CW			AJ
(1-8) [RED][s B][YELLOW][s B] [c 8][RVS		•360 A\$(1)="V303SEV204IGV1IBIRV303SBSR04S	- 1
0][0]	JC	FV2QDV1QAV3SRO3SBSRO2SAV104IEIRV3O3SFSRS	
•190 PRINT" [c 5][s U][s C][s C][s I] [YE		BV104QDV3SR03SFSRV105HCV2HCV304HEV2HBV10	TD
LLOW][s B][RED][s B][c 3]RIGHT=ROTATE CC	- 1	3112130142	JD
W (1-8) [RED][s B][YELLOW][s B] [c 5][s		•370 A\$(2)="V303SEV104IEIRV303SBSR04SFV1Q	
U][s C][s C][s I]"	JI	DV3SRO3SBSRO2SAV2O4IGV1IBIRV3O3SFSRSBV2O	
·200 PRINT" [c 4][RVSON][c F][c D][RVSOF		195.1911.0011000101	FE
F] [YELLOW][s B][RED][s B] [c 3]FIRE=SW		•380 A\$(3)="V303SEV104IEIRV303SBSR04SFV1Q	
ING SWORD[6" "][RED][s B][YELLOW][s B]		DV3SRO3SBSRO2SAV104HEV3SRO3SFSRSBSR.IFV2	
	OH	IR	FD
•210 PRINT" [RVSON][c V][c C][RVSOFF] [•390 SPRITE1,.,3,.,1,1,.:R(1)=5:MOVSPR1,.	
YELLOW][s B][RED][s B][c 3]F/DIR=MOVE IN		#.:MOVSPR1,163,70:POKE8184,80:SPRITE2,.,	
CUR DIR [RED][s B][YELLOW][s B] [c 4]		6,.,1,1:MOVSPR2,163,180:POKE8185,76:R(2)	
	FM		IO
·220 PRINT" [c 2][RVSON][cEP][cEP][RVSOF		•400 SPRCOLOR9,8:POKE8186,93:POKE8187,93:	
F] [YELLOW][s B][RED][s B][RED][RVSON]		SPRITE3,.,3,.,.,1:SPRITE4,.,3,.,.,1:	
RED [RVSOFF][BACKARROW]PORT1 [GREEN][RVS			HI
ON]GREEN[RVSOFF][BACKARROW]PORT2[RED][s		.410 POKE8188,58:POKE8189,58:SPRITE5,.,1,	
B][YELLOW][s B] [c 2][RVSON][cEP][cEP]"	BI.	.,1,.:SPRITE6,.,1,.,1,.:MOVSPR5,80+48,23	
·230 PRINT" [RVSON][cEP][cEP][RVSOFF] [DL	4:MOVSPR6, 240+48, 234	AI
YELLOW][s B][RED][s J][23"[s C]"][s K][Y		•420 POKE8190,57:POKE8191,57:SPRITE7,.,12	
	FH	,,,1,1:SPRITE8,,,12,,,1,1:MOVSPR7,100,12	
		0:MOVSPR8,217,120	JO
•240 PRINT" [RVSON][c P][c P][RVSOFF] [YELLOW][s J][25"[s C]"][s K] [c 2][RVSO		•430 FORA=.TO10:J=BUMP(1):NEXT:SYS3072:P0	
	GM	KE4594,.:H(1)=48:H(2)=48	NE
Wile File Fi	J. I	•440 PRINTCHR\$(145)CHR\$(13)CHR\$(27)"Q"TAB	Marie Co.
•250 PRINTTAB(10)"[BLUE]LOADING SPRITE DA		(6)"[c 7]PRESS FIRE BUTTONS TO BEGIN!";	
TA";: A=4864: B=6079: FORC=ATOB: READD: POKEC		•450 A=1:DO:PLAYA\$(A):A=A+O+(A=H)*H:LOOPU	
,D:NEXT:A=3584:B=3711:FORC=ATOB:READD:PO	MD	NTILJOY(1)=RPANDJOY(2)=RP:GRAPHIC1,.:POK	
ALO, DINEMI	MD		LK
• 260) A=3712:B=3712+63:FORC=ATOB:POKEC, .: N		E53248+21,255	LP
EXT: A=3712+8*3: B=3712+8*3*2: FORC=ATOB-1:	D.T	•460 REM MAIN LOOP	
	BJ	•470 DO:Z=H-Z:J=JOY(Z):A=FNA(.):IFAANDA=J	
•270 PRINTCHR\$(145)CHR\$(13)CHR\$(27)"Q"TAB		THENR(Z)=FNR(.):SOUNDZ,P,O:ELSEIFA=.ANDA	
(9)"LOADING INTERRUPT DATA";: A=3072: B=34		<pre><>JANDS(Z)=.THENS(Z)=0:SOUNDZ,P,H,,,,H:E</pre>	
	IJ	LSES(Z)=.	FM
•280 POKE4590, 30: POKE4591, 30: POKE4592, 60:		•480 POKEP+Z, FNS(.): J=BUMP(0): LOOPUNTILH(
POKE4593,190	EA	Z)<=.ORFNC(.):ONFNC(.)GOTO530,540,490:GO	
•290 PRINTCHR\$(145)CHR\$(13)CHR\$(27)"Q"TAB		T0600	OB
(9)"CREATING DUNGEON ARENA";:SPRSAV1,A\$:		•490 IFR(T)<>FNP(R(O))THEN520	EC
FORC=.TO320STEP24:GSHAPEA\$,C,.,1:NEXT	NF	•500 IFS(0)ANDS(T)=.THENH(T)=H(T)-T:MOVSP	
•300 FORC=21T0158STEP21:GSHAPEA\$,.,C,1:GS		RF, FNI(T),+.	AH
HAPEA\$,296,C,1:NEXT:FORC=.TO320STEP24:GS		•510 IFS(T)ANDS(0)=. THENH(0)= $H(0)$ -T:MOVSP	

				3
	RF+O,FNI(O),+.	DG	990 DATA146,128,1,199,,,236,.	DD
103	·520 SOUNDZ, B*B, F, T, B, B*H, H: MOVSPRO, F; FNI)	·1000 DATA0,32,,64,,128	PD
	(T):MOVSPRT, F; FND(O): J=BUMP(O): J=BUMP(O)		·1010 DATAO,1,,,2,,,.	PL
	:GOTO4/1)	GI.	·1020 DATAO, 240, ,1,16,,1,16	FE JC
100	•530 A=::IFJAND(Y-H)THENH(O)=FNU(O):MOVSF)	·1030 DATAO,1,200,,,68,,1	IC
100	RF+0, FN1(0),+.:GOTO570	TO	·1040 DATA252,,1,58,,2,70,.	CF
	•540 IFJAND(Y-H)THENH(T)=FNU(T):MOVSPRF, F	1	·1050 DATA002,191,192,2,169,96,2,165	GO
100	N1(T),+.:GOTO576	OE	·1060 DATA092,3,35,66,1,63,114,254	HC
100	•550 IFJANDLPTHENA=F+T:GOTO580	HJ	·1070 DATA002,84,,124,152,,63,.	FP
	•560 IFJANDRPTHENA=X:GOTO580	JO	·1080 DATAO,,,,,,	EL
100	•570 J=BUMP(0):J=BUMP(0):GOTO470	HL	·1090 DATAO,,,,,,255	MA
100	•580 POKE4594,0:IFATHENMOVSPRFNC(.),RSPPO		·1100 DATAO, 1, 192, . 2, 32, . 1	AA
100	S(A,.)+12, RSPPOS(A,O)+12:SPRITEFNC(.),,,		·1110 DATA032, 58,64,32,70,64,16	HJ
	.500 7 ENG()	IM	•1120 DATA189,64,8,194,192,5,157,128	EN
100	•590 Z=FNC(.)	LK	·1130 DATA003, 43, 128, .73, 128, 1, 43	GC
	•600 POKE4594,0:SOUNDO,20000,150,1,300,10		·1140 DATA128,1,157,128,1,194,192	OK
100	0,2:FORD=.TOF:FORA=OTOX:POKEP+Z,B+A:FORJ	-	·1150 DATA189,64,,70,64,.58.64	DF
	=.TOY:NEXTJ,A,D:POKEP+Z,92:FORJ=OTOF:SOU NDO,J*2000,F,,J*B,J*P,H:NEXT		·1160 DATAO,1,32,,2,32,,1	AC
	•610 SLEEP5: POKE53248+21, .: GRAPHIC.: RUN32	OI		JJ
	() SEEDI 3:1 OKE 33240+21, .: GRAPHIC.: RUN32		·1180 DATAO, 128, , , 128, , , 128	DM
	·620 DATAO,,128,,1,,,2	DA		PC
	•630 DATAO,,4,,,8,,.	FB	7,1,12,1,2,04	LG
	·640 DATA236,,1,199,,2,146,128	AM PC		OM
		PF		AO
		NG		OB
	•6/0 DATA125,40,32,254.8.39.131.200	KN		MA
	•680 DATA02448	IP	·1250 DATAO,1,16,,,240,,255 ·1260 DATAO,16,,,16,,,16	GH
	·690 DATAO,,,,,,.	LD	·1270 DATAO,,16,,,16,,.	BL
	·700 DATAO,,,,,,	MN	·1280 DATA016,,,16,,,124,.	ML
	·710 DATAO,,,,,252,,25	KJ	·1290 DATAOO1,199,,2,146,128,5,41	JL
	·720 DATA062,,42,64,127,78,252,128	HG	-1200 DAMACOL F (0 ()	CF
	· 730 DATA066, 196, 192, 58, 165, 64, 6, 149	GF		NJ
	·740 DATA064,3,253,64,,98,64,.	KL		DL GN
	750 DATA092,128,,63,128,,34,.	AI		MJ
	760 DATAO, 19, 128, ,8, 128, ,8	OC	-19/6 DAMAG / 0	KP
	770 DATA128,,15,,,,,	BL	·1350 DATA01632252.64.25	JD
	700 DATAG 1 20 151	AD	·1360 DATA062,128,42,65,.78,252,128	AN
	790 DATAO,1,32,,,151,,.	DO	•13/1) DATA066, 196, 192, 58, 165, 64, 6, 149	EK
46	800 DATA152,128,,175,64,,208,224	GO	·1380 DATA064, 3, 253, 64, 98, 64.	BG
	820 DATA120 117 /0 116 16/	FE	·1390 DATA092,128,.63,128,.34	LP
	83(1 DATA 200 106 175 (6 150 100	IM	·1400 DATA0,19,128,,8,128,,8	IH
100	8/// DATA() 151 1 00 1 1/	LD	·1410 DATA128,,15,,,,.	HF
	DEG DAMAG OOL	LB	·1420 DATAO,,,3,128,,4,64	LH
	960 DATAC 15 0 100 0	BM	·1430 DATAO, 4, 128, , 2, 92, , 2	GG
	970 DATA120 10 100 01	AA	·1440 DATA098,,2,189,,3,67,.	MG
1.	900 DATACICO 100 00 100 00	00 M	·1450 DATAOO1,185,128,1,212,128,1,146	PK
		EP	-1/70 DATAGET 0 100 0 00	CG
1.		H	*1/.O() DATA(((.)) 00 / 100 / 4	HF
		ΙΕ	-1/OC DATE C 2 100	CN
18.0	920 DATAO, 1, , , 1, , , 1	BE	• 15(1() DATA() 1F 0 100 0	BC
	930 DATAO, 11255	TA A	.1510 DATA120 10 100 01	FO
	940 DATAO,,,,,,	K	• 157/1 DATA(169 100 00 100 0- 1	AI
	950 DATA0,2448.39	1H	1530 DATAGGO OFO (1 (110 ()	NO
	960 DATA131,200,32,254.8.41.125.40	IJ		CJ
	970 DATA022, 170, 208, 3, 69, 128, 5, 125	D	1 550 DATAGE 100 OF CO 100	EO
	9XII DATADE 5 60 61 F 11 61 0	0	• 1560 DATAG 20 16	CG ON
			,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	JIV .

LD BK

GG

EE

EC

AJ

JD

FE

FD

IO

HI

AI

JO

NE

NF

LK LP

FM

OB EC

AH

•1570 DATA008,,,4,,,2,255	HM	•2150 DATA005,128,195,65,127,60,254,231	PC
•1580 DATAO,,,,,24,.	NI	•2160 DATA231,231,154,25,24,24,152,89	KK
•1590 DATA048,39,131,200,32,254,8,41	PG	·2170 DATA088,58,24,231,231,231,126,255	DL
·1600 DATA125,40,22,170,208,3,69,128	EB	•2180 DATA126,131,64,197,163,4,129,139	LP
·1610 DATA005,125,64,5,69,64,5,41	EB	•2190 DATA032,145,131,,129,126,255,126	FB
·1620 DATA064,2,146,128,1,199,,.	AE	•2200 DATA231,231,90,26,88,24,24	IL
	LL	·2210 DATA026,25,24,152,231,231,231,.	KJ
•1630 DATA124,,,16,,,16,.	HJ	·2220 DATA255,255,255,128,,1,183,255	KK
•1640 DATAO,16,,,16,,,16		•2230 DATA237,187,255,221,189,255,189,190	
·1650 DATA0,,16,,,16,,.	FB	22/6 DATASE 135 101 126 252 101 120 253	CE
•1660 DATAO, 120, , , 136, , , 136	ВО	•2240 DATA255,125,191,126,253,191,129,253	DD
·1670 DATAO,,228,,,34,,.	LL	•2250 DATA191,129,253,191,129,253,191,129	OF
·1680 DATA254,,,157,,1,35,.	EA	•2260 DATA253,191,129,253,191,129,253,191	
·1690 DATA001,95,224,1,84,176,1,82	FG	•2270 DATA129,253,191,126,253,190,255,125	
•1700 DATA174,1,145,161,,159,185,.	KD	·2280 DATA189,255,189,187,255,221,183,255	
•1710 DATA129,42,,254,76,1,31,128	LM	·2290 DATA237,128,,1,255,255,255,255	NE
•1720 DATA002,,,4,,,8,.	KH	•2300 REM INTERRUPT DATA	НО
•1730 DATAO,16,,,32,,,.	MF	·2310 DATA120,169,21,141,20,3	OI
•1740 DATAO,,,,1,192,,2	PO	·2320 DATA169,12,141,21,3,169	AM
·1750 DATA032,,1,32,,58,64,.	LI	·2330 DATA2,133,251,169,1,133	JK
·1760 DATA070,64,,189,64,,194,192	IL	·2340 DATA252,88,96,173,242,17	MJ
•1770 DATA001,157,128,1,43,128,255,73	JC	·2350 DATA240,2,76,101,250,198	J0
·1780 DATA128,1,43,128,1,157,128,.	DM	·2360 DATA251,208,24,169,3,133	FC
•1790 DATA194,192,,189,64,,70,64	BH	·2370 DATA251,165,252,24,105,93	HF
·1800 DATAO, 58, 64, 1, 32, ,2	MJ	·2380 DATA162,2,157,249,31,202	CP
·1810 DATA032,,1,192,,,,.	IF	·2390 DATA208,250,169,1,56,229	OI
•1820 DATA064,,,32,,,16,.	IF	•2400 DATA252,133,252,169,1,56	EF
	JP	•2410 DATA229,252,170,189,0,220	CI
•1830 DATA0,8,,,4,,,2	JO	•2420 DATA170,41,16,240,7,165	GK
•1840 DATA063,,1,252,152,1,2,84	FP	•2430 DATA252,10,72,76,30,13	EA
•1850 DATA001,63,114,3,35,66,2,165			NG
•1860 DATA092,2,169,96,2,191,192,2	KN	•2440 DATA138,41,15,133,253,169	AH
·1870 DATA070,,1,58,,1,252,.	HO	·2450 DATA15,56,229,253,168,165	EG
·1880 DATAO,68,,1,200,,1,16	OD	•2460 DATA252,10,72,170,152,201	
·1890 DATAO,1,16,,,240,,255	AC	•2470 DATA4,208,22,222,214,17	AE
·1900 DATA028,,56,20,,40,116,.	BJ	•2480 DATA208,14,138,74,168,200	FF
•1910 DATA046,66,,66,121,126,158,4	FD	•2490 DATA152,77,230,17,141,230	ME
·1920 DATA129,32,3,,192,2,,64	FP	•2500 DATA17,222,214,17,76,30	CA
·1930 DATA002,129,64,2,231,64,3,.	HI	·2510 DATA13,201,8,208,22,254	FB
•1940 DATA064,5,148,224,9,65,80,242	PC	·2520 DATA214,17,208,14,138,74	OB
•1950 DATA162,207,132,128,161,244,156,175	FP	·2530 DATA168,200,152,77,230,17	ME
·1960 DATA020,65,40,28,62,56,,.	NO	·2540 DATA141,230,17,254,214,17	EL
·1970 DATAO,,,,,,.	LE	•2550 DATA76,30,13,201,1,208	LP
·1980 DATAO,,,,,,	PG	·2560 DATA7,232,222,214,17,76	IM
•1990 DATAO,,4,,,4,,1	HE	•2570 DATA30,13,201,2,208,7	JI
·2000 DATA016,64,,65,,1,81,.	JF	•2580 DATA232,254,214,17,76,30	MI
·2010 DATA004,81,64,4,101,64,1,238	DL	•2590 DATA13,201,5,208,26,222	GG
•2020 DATA064,5,171,80,6,255,144,6	KH	·2600 DATA214,17,208,14,138,74	KO
•2030 DATA125,144,1,150,64,,85,.	MI	•2610 DATA168,200,152,77,230,17	OF
·2040 DATAO,,,,,,	AK	•2620 DATA141,230,17,222,214,17	FB
·2050 DATAO,,,,,,	CB	•2630 DATA232,222,214,17,76,30	JB
•2050 DATAO,,,,2,,,64	IO	•2640 DATA13,201,6,208,26,222	EF
	MA	•2650 DATA214,17,208,14,138,74	MI
·2070 DATA128, ,18,64, ,17,128, .		•2660 DATA168,200,152,77,230,17	NH
•2080 DATA017,64,,71,64,,213,64	DJ	•2670 DATA141,230,17,222,214,17	GD
•2090 DATAO, 87, 80, , 117, 80, 1, 254	PH		NM
•2100 DATA208,1,191,144,2,251,208,2	PI	•2680 DATA232,254,214,17,76,30	NJ
·2110 DATA125,144,1,150,64,,85,.	AH	•2690 DATA13,201,9,208,26,254	
·2120 DATAO,,,,,,	IH	•2700 DATA214,17,208,14,138,74	PC
•2130 DATAO,,,,,,	HB	•2710 DATA168,200,152,77,230,17	DJ
•2140 DATA127,60,254,144,195,33,162,203	GM	•2720 DATA141,230,17,254,214,17	FI
O. AUOVI			

•27 •27 •27 •27 •27 •27

• 28 • 28

• 28 • 28 • 28 • 28 • 28 • 28 • 28 • 29 • 29 • 29 • 29

·2730 DATA232,222,214,17,76,30	
·2740 DATA13,201,10,208,23,254	
·2750 DATA214,17,208,14,138,74	
·2760 DATA168,200,152,77,230,17	
·2770 DATA141,230,17,254,214,17	
·2780 DATA232,254,214,17,104,170	
·2790 DATA74,168,200,152,45,230	
·2800 DATA17,208,20,189,214,17	
•2810 DATA56,205,238,17,176,11	
·2820 DATA172,238,17,200,152,157	
·2830 DATA214,17,76,126,13,138	
·2840 DATA74,168,200,152,45,230	
·2850 DATA17,240,17,189,214,17	
·2860 DATA56,205,239,17,144,8	
·2870 DATA172,239,17,136,152,157	
·2880 DATA214,17,232,189,214,17	
·2890 DATA56,205,240,17,176,11	
·2900 DATA172,240,17,200,152,157	
·2910 DATA214,17,76,126,13,189	
·2920 DATA214,17,56,205,241,17	
·2930 DATA144,8,172,241,17,136	
·2940 DATA152,157,214,17,76,101,250	
, , , , , , , , , , , , , , , , , , , ,	

IO KA HD MM CK BN OG HG NO

AF

GH

DM

KL

CC

FA

OH

NA

IA

ED

EN

AC

PN

CODO: 74 68

20

2E

(11)

00

00

C7

18

47

20

00

nn

(1)(1)

no

A9

COD8:

COEO:

COE8:

COFO:

COF8:

C100:

C108:

20

45

2E

00

50

nn

(11)

nn

50

4F

20

00

50

FF

3F

85

53

53

2E

90

nn

20

01

19

20

20

nn

nn

CICI

9 F

A9

An

54

2E

111

(1)

1111

BE

6E

6F

20

99

nn

nn

85

38

96

AB

E8

FO

7 A

F5

TO GEOS FROM PAGE 51

PS TO GEOS.ML

Starting address in hex: COOO Ending address in hex: C570

PC KK

DL

LP

FB

IL

KJ

KK

NN

CF

BD

OF

FI

EB

NE

HO

OI

AM

JK

M.J

J0

FC

HF

CP

OI

EF

CI

GK

EA

NG

AH

EG

AE

FF

ME

CA

FB

OB

ME

EL

LP

IM

JΙ

MI

GG

KO

0F

FB

JB

EF

MI

NH

GD

NM

NJ

PC

DJ

FI

COC8:

6F 72 6D

61

74

20

77

69

EE

Flankspeed required for entry of PS TO GEOS.ML! See page 79.

```
C0000:
       BF FF
                FF
                    FF
                         BB
                             BA
                                 B9
                                     BA
                                         AA
C008:
        93
            91
                 A 3
                     13
                         91
                             A2
                                 BA
                                     91
                                         64
CO10:
        80
            On
                01
                     B9
                         27
                             9F
                                     24
                                 A1
                                         D7
C018:
        93
            B9
                E4
                     9F
                         89
                             24
                                 91
                                     B9
                                         E2
C020:
        27
            91
                80
                    OC
                         01
                             9F
                                 FC
                                     01
                                         04
CO28:
        BF
            FC
                01
                     BC
                         nn
                             01
                                 9E
                                         BD
C030:
        DD
            90
                42
                     51
                         96
                             72
                                 5 D
                                     92
                                         2 B
C038:
        42
            45
                9E
                    7 B
                         DD
                             FF
                                 FF
                                     FF
                                         B7
            06
C040:
        83
                50
                    00
                         52
                             73
                                 56
                                     nn
                                         E5
C048:
        52
            50
                53
                    20
                         54
                             4F
                                 20
                                     47
                                         69
C050:
       45
            4F
                53
                    20
                         20
                                     2E
                             56
                                 31
                                         2E
C058:
        30
            nn
                nn
                    00
                        00
                             53
                                 68
                                     61
                                         A 5
C060:
        77
            6 E
                20
                    4 B
                         2 E
                             20
                                 53
                                     6 D
                                         CO
C068:
        69
            74
                68
                    (11)
                        00
                            nn
                                ()()
                                     nn
                                         AE
C070:
        nn
            nn
                90
                    00
                        00
                            CIC
                                nn
                                     50
                                         70
C078:
        00
            00
                111
                    nn
                        90
                            nn
                                nn
                                     nn
                                         78
C080:
        00
            00
                nn
                    nn
                        nn
                            nn
                                nn
                                     nn
                                        80
C088:
        00
            00
                rin
                    00
                        nn
                            00
                                ()()
                                     nn
                                        88
        nn
            nn
                00
                    nn
                        nn
                            00
                                nn
                                     nn
                                        90
C098:
        nn
            nn
                nn
                    nn
                        43
                            6F
                                6E
                                     76
                                         30
COAO:
        65
            72
                74
                    20
                        79
                            6F
                                75
                                     72
                                        DD
COA8:
        20
                    69
            50
                72
                        6E
                            74
                                20
                                     53
                                        4B
       68
COBO:
            6F
                70
                    20
                        67
                            72
                                61
                                     70
                                        C4
COB8:
        68
            69
                63
                    73
                        20
                            69
                                6E
                                    74
                                        CD
COCO:
       6F
            20
                47
                    45
                        4F
                            53
                                20
                                    66
                                        06
```

```
C110:
         20
              4 E
                  C1
                      A 2
                          nn
                              20
                                  32
                                       52
 C118:
         20
              3E
                  53
                      EO
                          02
                              FO
                                  OC
                                      8A
                                           34
 C120:
         DO
              DA
                  20
                      D2
                          54
                              20
                                  94
                                      54
                                           1 C
 C128:
         20
              52
                  55
                      4C
                          2C
                              C2
                                  84
                                      OA
                                           BF
 C130:
         AA
              BD
                  53
                      52
                          85
                              74
                                  BD
                                      54
                                           4 A
 C138:
         52
              85
                  75
                      A 9
                          4 A
                              85
                                  02
                                      A9
                                           AA
 C140:
         52
              85
                 03
                      4C
                          56
                              C2
                                  81
                                      OC
                                          OE
 C148:
         08
              1E
                  74
                      01
                          11
                              48
                                          9 E
                                  nn
                                      61
         52
 C150:
             81
                  52
                      9E
                          52
                              AF
                                  52
                                      C4
                                          2E
 C158:
         52
             D9
                      F8
                  52
                          52
                              18
                                  49
                                      4 E
                                          D1
 C160:
         53
             45
                 52
                      54
                          20
                              50
                                  52
                                      49
                                          AB
 C168:
         4E
             54
                  20
                      53
                          48
                              4F
                                  50
                                      20
                                          86
 C170:
         47
             52
                 41
                      50
                          48
                              49
                                  43
                                      20
                                          90
 C178:
         44
             49
                 53
                     4B
                          nn
                              18
                                  49
                                      4 E
                                           54
 C180:
         53
             45
                 52
                      54
                          20
                              47
                                  45
                                      4F
                                          BB
         53
 C188:
             20
                 57
                     4F
                          52
                              4 B
                                  20
                                          A4
 C190:
         49
             53
                 4 B
                      20
                         2E
                              20
                                  2E
                                      20
                                          35
 C198:
         2E
             nn
                 18
                     46
                         49
                              4C
                                  45
                                      20
                                          20
 CIAO:
         4E
             4F
                 54
                     20
                         46
                              4F
                                  55
                                      4 E
                                          EB
 C1A8:
         44
             21
                 nn
                     18
                         45
                              52
                                  52
                                          5F
 C1BO:
         52
             20
                 52
                     45
                         41
                             44
                                  49
                                      4 E
                                          D7
 C1B8:
         47
             20
                 46
                     49
                         4C
                              45
                                  21
                                      nn
                                          62
 C1CO:
         18
             45
                 52
                     52
                         4F
                              52
                                  20
                                      57
 C1C8:
         52
             49
                 54
                     49
                         4E
                             47
                                  20
                                     46
                                          FD
        49
 CIDO:
             4C
                 45
                     21
                         nn
                             18
                                 54
                                     48
                                          81
 C1D8:
         49
             53
                 20
                     49
                         53
                              20
                                 4 E
                                      4 F
                                          EF
 C1E0:
         54
             20
                 41
                     20
                         47
                             45
                                 4F
                                      53
                                          E5
C1E8:
         20
             57
                 4F
                     52
                         4B
                             20
                                 44
                                     49
                                          FA
CIFO:
         53
            4 B
                 21
                     nn
                         18
                             53
                                 55
                                     43
                                          B4
C1F8:
        43
             45
                 53
                     53
                         46
                             55
                                 4C
                                     20
                                          30
C200:
        43
            4F
                 4E
                     56
                         45
                             52
                                 53
                                     49
                                          6 B
C208:
        4F
            4E
                 21
                     nn
                         18
                             45
                                 4E
                                     54
                                          C6
C210:
        45
            52
                 20
                     4E
                         41
                             4 D
                                 45
                                     20
                                         OA
C218:
        4F
            46
                 20
                     46
                         49
                             4C
                                 45
                                     20
C220:
        4F
            52
                 00
                     18
                         50
                             52
                                     53
                                 45
                                         15
C228:
        53
            20
                 52
                         54
                     45
                             55
                                 52
                                          7 D
                                     4 E
C230:
        20
            46
                 4F
                     52
                         20
                             4C
                                 49
                                     53
                                         41
C238:
        54
            nn
                 20
                     A1
                         C2
                             A9
                                 nn
                                     8D
                                         48
C240:
        3D
            54
                 A9
                     3D
                         85
                             OC
                                 A 9
                                     54
                                         48
C248:
        85
            OD
                A9
                     A2
                         85
                                 A9
                             02
                                     53
                                         AB
C250:
        85
            03
                 20
                     56
                         C2
                             A 5
                                 02
                                     C9
                                         83
C258:
        02
            DO
                03
                     A 2
                         02
                             60
                                 C9
                                     06
                                         03
C260:
        FO
            D8
                AD
                    3D
                         54
                             DO
                                 05
                                     20
                                         5F
C268:
        B9
            53
                DO
                    CE
                         A9
                             3D
                                 85
                                     OE
                                         84
C270:
        A 9
            54
                85
                    OF
                         20
                             8D
                                 53
                                     20
                                         24
C278:
        OB
            C2
                8 A
                    FO
                        08
                             A 2
                                 02
                                     20
                                         8E
C280:
        32
            52
                4C
                    3E
                        53
                             20
                                 5E
                                     54
                                         B5
C288:
        60
            An
                OF
                    B1
                        OE
                             C9
                                 61
                                     90
                                         14
C290:
        1,9
            C9
                7 B
                    BO
                        05
                             38
                                 E9
                                     20
                                         D6
        91
C298:
            OE
                88
                    10
                        EE
                            60
                                81
                                     OB
                                         AC
                                    AHOY!
```

· 27 · 28 · 29

.30

•31

.32

• 33

. 34

• 35

. 36

.37

• 38

. 30

. 41

•4]

(2

. 42

. 43

B

- 41

. 45

.46

```
60 A2
                                                                                 04
                                                         06 4C 32
                                                                      52
                                             C460: A2
            20 10 53 0B 10 30 27 A6
C2A0: 10
                                                                                  52
                                                                                      7C
                                                              52
                                                                  68
                                                                      68
                                                                          4C
                                                                              nn
                                                      20
                                                          32
                                              C468:
            OD
                    3 A
                        UC
                           10 02
                                    01
                                        72
       53
               10
C2A8:
                                                                                  FF
                                                                                      25
                                                                 15
                                                                          FF
                                                                              FF
                                                                      BF
                                              C470:
                                                      88
                                                          54
                                                              03
                            A9
                                12
                                    A2
                                        B6
               11
                    48
                        (1)(1)
       48
            06
C2BO:
                                                                  80
                                                                      60
                                                                          01
                                                                              80
                                                                                  60
                                                                                      FC
                                              C478:
                                                      80
                                                          40
                                                             01
                            86
                                05
                                    86
                                        4 B
                    85
                        70
            85
               04
       01
                                                                                  80
                                                                                      F5
                                                                          50
                                                                              35
                                              C480:
                                                      01
                                                          80
                                                              60
                                                                  OD
                                                                      80
                                    A9
                                        96
                        FB
                            85
                                DA
C2CO:
        71
            A9
               nn
                    85
                                                                                  C1
                                                                                      46
                                                          D9
                                                              80
                                                                  53
                                                                      21
                                                                          80
                                                                              5C
                                                      50
                                              C488:
                                    C1
                                        23
        80
            85
                FC
                    85
                        OB
                            20
                                E4
C2C8:
                                                                                      2 B
                                                                      CE
                                                                          01
                                                                              9F
                                                                                  C8
                                                          59
                                                              01
                                                                  87
                                              C490:
                                                      80
                                        B2
            02
                B1
                    FB
                        FO
                            26
                                C8
                                    B1
C2DO:
       An
                                                                                      BB
                                                                      B1
                                                                          FC
                                                                              01
                                                                                  BF
                                                              F8
                                                                  01
                                              C498:
                                                      01
                                                          B8
                                FB
                                    DO
                                        25
                        1F
                            B1
            FO
                21
                    An
C2D8:
       FB
                                                                              66
                                                                                  01
                                                                                      FB
                                                                          80
                                              C4AO:
                                                      6E
                                                          01
                                                              9C
                                                                  66
                                                                      01
                                        C3
                            03
                                BO
                                    14
                    FB
                        C9
       1 B
            88
                B1
C2E0:
                                                                                      DO
                                                          6C
                                                              01
                                                                  80
                                                                      38
                                                                          01
                                                                              80
                                                                                  nn
                                              C4A8:
                                                      80
                                        2B
                                54
                                    C8
C2E8:
       AO
            05
                B1
                    FB
                        99
                            38
                                                                                      39
                                                                              CIC
                                                                                  00
                                                      01
                                                          FF
                                                              FF
                                                                  FF
                                                                      83
                                                                          04
                                              C4B0:
                            14
       CO
            15
                DO
                    F6
                        20
                                54
                                    FO
                                        08
                                                                      00
                                                                          50
                                                                              68
                                                                                  6F
                                                                                      A4
                                                              53
                                                                  (1)()
                                              C4B8:
                                                      70
                                                          (1(1)
                        18
                            A 5
                                FB
                                    69
                                        22
        03
            A2
                nn
                    60
C2F8:
                                                                  53
                                                                      63
                                                                          72
                                                                              61
                                                                                  70
                                                                                      BF
                                                      74
                                                          6F
                                                              20
                                              C4CO:
                        CB
                                01
                                    80
                                        2 E
            85
                FB
                    90
                            AE
        20
C300:
                                                                              (1()
                                                                                  nn
                                                                                       CF
                                                                      31
                                                                          (11)
                                              C4C8:
                                                          56
                                                              31
                                                                  2E
                                                      20
                                FF
                                    60
                                        B6
                80
                    DO
                        AC
                            A2
C308:
        AD
            nn
                                                                              20
                                                                                   53
                                                                                       50
                                              C4D0:
                                                      ()()
                                                          50
                                                              68
                                                                  6F
                                                                      74
                                                                          6F
                        A9
                            54
                                85
                                    03
                                        EB
            24
                85
                    02
C310:
        A9
                                                          72
                                                              61
                                                                  70
                                                                      nn
                                                                          00
                                                                              (1()
                                                                                  (11)
                                                                                       80
                                              C4D8:
                                                      63
                                        27
                    A5
                            C9
                                04
                                    60
C318:
        20
            56
                C2
                        02
                                                                              00
                                                                                  (1)()
                                                                                       EO
                                              C4E0:
                                                      (1(1)
                                                          00
                                                              nn
                                                                  COCO
                                                                      nn
                                                                          nn
                                03
                                        63
                    1E
                        36
                            54
                                    01
C320:
        81
            OB
                OA
                                                              00
                                                      50
                                                          nn
                                                                  (1)()
                                                                      nn
                                                                          (1)
                                                                              00
                                                                                   nn
                                                                                       E8
                                              C4E8:
                        OB OA
                                3C
                                    4 E
                                        6 D
C328:
        48
            1)4
                11
                    48
                                                                              nn
                                                                                       FO
                                                          (1)()
                                                              00
                                                                  nn
                                                                      00
                                                                          ()()
                                                                                  (1()
                                              C4FO:
                                                      nn
                                        58
        54
            nn
                18
                    46
                        69
                            6C
                                65
                                    3 A
C330:
                                                                              (1)
                                                                                   (1()
                                                                                       F8
                                                                  (1)
                                                                      nn
                                                                          (1)()
                                                      00
                                                          00
                                                              00
                        40
                            40
                                40
                                    40
                                        1 A
                                              C4F8:
                40
                    40
        20
            40
C338:
                                              C500:
                                                              nn
                                                                  00
                                                                      りり
                                                                           00
                                                                              nn
                                                                                   00
                                                                                       (1)()
                                                      nn
                                                          nn
                            40
                                40
                                    40
                                        42
            40
                40
                    40
                        40
        40
C340:
                                                                      nn
                                                                           nn
                                                                              nn
                                                                                  00
                                                                                       08
                                              C508:
                                                      nn
                                                          (1)()
                                                              00
                                                                  (1)(1)
                                20
                                    74
                                        63
                    55
                        73
                            65
                18
C348:
        40
            nn
                                                      nn
                                                          nn
                                                              (1(1)
                                                                  nn
                                                                      nn
                                                                           00
                                              C510:
                            69
                                6C
                                    65
                                        57
C350:
        68
            69
                73
                    20
                        66
                                                                  ()()
                                                                      (1()
                                                                           ()()
                                                                              nn
                                                                                   nn
                                                                                       18
                                                      00
                                                          00
                                                              ()()
                                              C518:
                                        CO
        3F
            (1(1)
                A9
                    nn
                        85
                            10
                                A9
                                    40
C358:
                                                                           00
                                                                              00
                                                                                   nn
                                                                                       20
                                                      CIC
                                                          nn
                                                              nn
                                                                  nn
                                                                      nn
                                              C520:
                AG
                    1C
                        B1
                            OC
                                38
                                    E9
                                        93
        85
            11
C360:
                                                                           nn
                                                                              CIC
                                                                                   00
                                                                                       28
                                                              (1)()
                                                                  00
                                                                      CIC
                                    B1
                                        DF
                                              C528:
                                                      00
                                                          00
                        72
                                01
       02
            29
                01
                    85
                            AG
C368:
                                              C530:
                                                      (1)()
                                                          00
                                                              nn
                                                                  00
                                                                      00
                                                                           nn
                                                                              (1)
                                    05
                                        17
                    C8
                        B1
                            OC
                                85
C370: 0C
            85
                04
                                              C538:
                                                      ()()
                                                          00
                                                              00
                                                                  (1)()
                                                                       nn
                                                                           00
                                                                              (1)(1)
                                                                                   50
                                                                                       38
                                    07
                                85
                                         E6
                            03
C378:
       A 9
            nn
                85
                    06
                        A 9
                                                                  00
                                                                      (11)
                                                                           (1()
                                                                              COCO
                                                                                   nn
                                                                                       40
                                                      nn
                                                          nn
                                                              CICI
                                              C540:
                                    74
                                         5F
        20
            FF
                C1
                    60
                        50
                            68
                                6F
C380:
                                                              00
                                                                                       48
                                                                   50
                                                                       nn
                                                                           nn
                                                                              (1()
                                                                                   (1)()
                                              C548:
                                                      CIC
                                                          nn
        6F
            20
                53
                    63
                        72
                            61
                                70
                                    00
                                         13
C388:
                                                                  nn
                                                                       00
                                                                           nn
                                                                              (1)
                                                                                   nn
                                                                                       50
                                              C550:
                                                      99
                                                          nn
                                                              (1(1)
                    A9
                        88
                            85
                                02
                                     A 9
                                        OB
        20
            A2
                54
C390:
                                              C558:
                                                      20
                                                           53
                                                              48
                                                                   41
                                                                       57
                                                                           4E
                                                                               20
                                                                                   4 B
                                                                                       66
                            C2
                                A 2
                                    01
                                         60
            85
                03
                    4C
                        38
C398:
        54
                                                      2E
                                                           20
                                                              53
                                                                  4 D
                                                                      49
                                                                           54
                                                                               48
                                                                                   20
                                                                                       55
                            C2
                                              C560:
                                         03
                52
                    20
                                    8B
C3AO:
        20
            32
                        A1
                                AD
                                                              41 48
                                                                      4F
                                                                           59
                                                                               21
                                                      2D
                                                          20
                                         79
                                              C568:
                                     32
        84
            FO
                01
                    60
                        A 2
                             05
                                20
C3A8:
                                                          70
                                              C570:
                                                      00
                    54
                        06
                             30
                                (1()
                                    OC
                                         88
        52
            4C
                A 2
C3B0:
            OB
                38 00
                        16
                            nn
                                06
                                     90
                                         18
        nn
C3B8:
                                                                                 BINARY TO GEOS
                                     SS
                                         C7
                                BF
        24
                    16
                        00
                             4 D
C3C0:
            BF
                ()()
                         2D
                             34
                                     72
                                         57
C3C8: 00
            05
                06
                    OB
                                 A4
                                              · 100 REM* BINARY TO GEOS V1.0 FROM AHOY!! JO
                                     54
                                         8D
                             B9
                                DO
        B9
            CE
                54
                    85
                        7 B
C3D0:
                                              ·110 REM* (E)NGENDERED BY SHAWN K. SMITH JO
                B9
                    CC
                        54
                             85
                                 7 D
                                    A 9
                                         62
        85
            7C
C3D8:
                                              •120 PN$="PS TO GEOS": DATA 000,006,087,00
                                     45
                                         6 A
        nn
            8D
                BB
                    55
                        85
                             76
                                 A9
C3E0:
                                                                                             HA
                                               3,008,004,030
            BC
                55
                    85
                         77
                             A 9
                                 02
                                     85
                                         B6
        8D
C3E8:
                                                                                             FE
                                     A2
                                         17
                                              •130 FORD=1T016:P$=P$+CHR$(160):NEXT
                        79
                                 7 D
        78
            A9
                40
                    85
                             A4
C3F0:
                                                                                             FH
                                              •140 PN$=MID$(PN$+P$,1,16):Z$=CHR$(0)
                    54
                         20
                             43
                                 55
                                     C8
                                         45
        04
            B9
                B8
C3F8:
                                                                                             HF
                                              •150 FORD=1TO7: READ DI(D): NEXT
                                 7 B
                                         2E
            10
                F6
                     A6
                         7C
                             A 5
                                     18
C400:
        CA
                                                                                             IC
                             A4
                                 7B
                                     84
                                         4F
                                              •160 PRINTCHR$(147):PRINT:PRINT
        69
                20
                    43
                         55
C498:
            80
                                              ·170 INPUT"ENTER NAME OF BINARY FILE"; B$
                                                                                             HE
                                     55
                                         OE
        7 A
            An
                00
                    B1
                        78
                             20
                                 43
C410:
                                              ·180 OPEN1,8,15,"IO":OPEN8,8,8,B$+",P,R"
                                                                                             PE
                                         C9
                             79
                                     7 A
                    02
                         E6
                                 A4
C418:
        E6
             78
                DO
                                              •190 GOSUB220:GOSUB250:GOSUB390
                                                                                             IO
                                 A4
                                     7 D
                                         04
C420:
        88
            DO
                EC
                    CA
                         DO
                             DF
                                              ·200 PRINT:PRINTCHR$(18)PN$" CONVERTED!"
                                                                                             OD
                                         58
                 B9
                     C2
                         54
                             20
                                 43
                                     55
        A 2
            04
C428:
                                                                                             GM
                                 8 D
                                     BD
                                         32
                                              210 CLOSE8:CLOSE1:END
        C8
            CA
                10
                    F6
                         A5
                             76
C430:
                                                                                             CH
                                              ·220 INPUT#1, E, E$, A$, A$: IFE=OTHENRETURN
                                         31
                                     84
         55
             A5
                 77
                     8D
                         BE
                             55
                                 60
C438:
                                               ·230 PRINT:PRINT"[3"*"]";E;E$;" [3"*"]"
                                                                                             GK
                     91
                         76
                             E6
                                 76
                                     DO
                                         8 A
        73
                nn
C440:
             AG
                                                                                             IK
                                              240 CLOSE8:CLOSE1:END
                                         3F
                                 A9
                                     74
        02
            E6
                77
                     A4
                         73
                             60
 C448:
                                                                                ":PRINT
                                                                                             FP
                                               ·250 PRINT: PRINT"WORKING
                 A9
                     55
                         85
                             15
                                 A9
                                     00
                                         2D
        85
             14
 C450:
                                                                                             HP
                                               ·260 T=18:S=1:CLOSE8:OPEN8,8,8,+"#"
                                         25
 C458:
                     ED
                         C1
                             8A
                                 DO
                                     06
         85
             16
                 20
```

CHAINMAIL

Continued from page 70

scream

Н

As long as the other player is still in contact with you, he will not lose his balance and fall into the shaft. This makes it easy to push your enemy razor-close to the shaft, then pull free and watch him tumble in. Just make sure it is not he who pulls free and watches you tumble in!

Swordplay has many variations. You can lock your sword into place and execute the forward charge. When we were debugging the game, my friend developed an interesting technique of locking his sword out and spinning in place. Whenever I tried to approach him, I was struck with several blows. You can also try striking, rotating to cause a blow to glance off, and rotating back and striking your enemy again. Another method is to strike, pull back out of range, wait for your opponent's sword to swish by harmlessly, and plunge forward with a blow again. It takes a great deal of practice to execute any of these techniques.

Once you get the other knight at a disadvantage, he'll probably lose his nerve and break for one of the healing fires. Don't let him reach it. If possible, interpose yourself between him and the nearest escape route. If he rotates away to protect himself from your blows, begin shoving him towards one of the shafts.

Chainmail! is a simple yet fiercely competitive game with superb graphics. I consider it my finest offering yet in the way of arcade games for the C-128. Please enjoy it, and feel free to write me with any complaints, requests, etc., c/o Ahoy!

Since there are a lot of data statements, make sure you save one or two copies to disk before running the program, in case a typing error crashes it. It's a lot easier to look through the listing and find a single error than to type the whole thing over again.

SEE PROGRAM LISTING ON PAGE 91

TIPS AI-ICY

Continued from page 47

- •5050 PRINT"[CLEAR]PRESS <SHIFT> TO PAUSE <[BACKARROW]> TO EXIT":GET#2,B\$,C\$
- •5060 IFPEEK(197)=57THEN5170
- •5070 IFPEEK(653)=1THEN5070
- •5080 GET#2,Z\$,B\$,C\$,D\$:IFZ\$=""ANDB\$=""TH
- •5090 V\$=STR\$(ASC(C\$+O\$)+ASC(D\$+O\$)*256)+
 " ":V\$=MID\$(V\$,2):PRINT:PRINTV\$;;Q=0
- •5100 GET#2, C\$: C=ASC(C\$+O\$): IFC=OTHEN5060
- •5110 IFC>127ANDC<204ANDQ=OTHENPRINTT\$(C-127);:GOTO5100
- •5120 IFC=34THENQ=1-Q
- •5130 PRINTCHR\$(C);:GOTO5100
- ·5140 GET#15, N: IFN=OTHENRETURN
- •5150 IFN=6THENPRINT"[DOWN][DOWN]PROGRAM NOT ON THIS DISK":FORK=1TO2000:NEXT:RUN
- •5160 PRINT"[DOWN][DOWN]DISK ERROR. PROGR AM ABORTED
- •5170 CLOSE15:POKE198,0

EXPLODED CHARACTERS

When designing programmable characters (such as some German, French, Spanish, or Turkish letters), the task at hand is usually just a slight modification of an English character which is already available from the keyboard. Therefore the exploded view of a keyboard letter may give good guidance as to how the modified version of that letter should be designed as a programmable character.

The user responds to the INPUT prompt by typing a character and pressing RETURN. The program gives an exploded (64 times larger) view of that character. For lower case characters replace the value 53248 in line 35 with 55296.

Necah Buyukdura
 Ankara, Turkey

- ·10 POKE 52,48: POKE 56,48: CLR
- ·15 B\$="[8" "]"
- ·16 M\$=CHR\$(147):H\$=CHR\$(19):R\$=CHR\$(18): O\$=CHR\$(146):D\$=CHR\$(17)
- •20 PRINT M\$D\$D\$D\$D\$" "R\$B\$" "
- •25 FOR J=1 TO 8: PRINT" "R\$" "O\$B\$R\$" ": NEXTJ: PRINT" "R\$B\$" "
- ·30 PRINT H\$D\$B\$B\$: PRINT B\$B\$
- •35 PRINT H\$D\$;: INPUT " CHARACTER ";C\$:C H=PEEK(1077)*8+53248
- -40 POKE 56334, PEEK (56334) AND 254: POKE1, PE EK (1) AND 251
- ·45 FOR I=0 TO 7:A(I)=PEEK(CH+I): NEXTI
- •50 POKE 1, PEEK(1) OR4
- ·55 POKE56334, PEEK (56334) OR1
- •60 PRINT H\$D\$D\$D\$D\$: FOR X=0 TO 7: X\$=""
- •65 FOR Y=7 TO 0 STEP -1
- •70 IF A(X)>=2[UPARROW]Y THEN X\$=X\$+CHR\$(113): A(X)=A(X)-2[UPARROW]Y:GOTO 80
- •75 X\$=X\$+" "

•80 NEXT Y: PRINT CHR\$(158)TAB(2)X\$: NEXT X: GOTO 30

QUICKER TRIG FUNCTIONS

One of the problems with standard Commodore BASIC is its slow speed—especially when trigonometric functions are involved. It takes about 0.26 milliseconds for a sine or cosine value to be calculated. This may not seem like a lot of time, but when the functions are used repeatedly, it can slow down a program's execution considerably. (Also, the values must be calculated in radian measure, not degrees—an annoying quirk.)

The following program demonstrates the slow speed of BASIC 2.0 using trig functions, by animating an orbitting sprite:

•100 REM DEFINE SPRITE

·101 V=53248

•102 FORI=832T0832+63:POKEI,255:NEXT

·103 POKE2040,13:POKEV+21,1:POKEV+39,1

•120 REM PUT SPRITE IN ORBIT

•140 FORX=OTO2*[PI]STEP[PI]/180

•141 POKEV, 165+90*COS(X): POKE V+1, 140+90* SIN(X)

•142 NEXT: GOTO 140

The trig functions, sine and cosine, were bogging down the animation speed because the functions' values must be calculated each time. If, however, the trig functions were precalculated and stored in an array, then run time would be much quicker, and degrees could be used instead of radians as an argument. Just add these lines to increase program speed:

·110 REM PRECALCULATE SINE, COSINE

- •112 DIM SN(360), CS(360): FORD=OTO360: SN(D) = SIN(D*[PI]/180): CS(D) = COS(D*[PI]/180): NEXT
- •140 FORX=0T0360
- •141 POKEV,165+90*CS(X):POKE V+1,140+90*S N(X)

Note that we have changed the functions, sin() and cos(), to the variables sn() and cs().

After a 30 second pause for sine and cosine precalculation, you will see a 300% improvement in speed! This simple precalculation trick can be applied to other functions

as well, and will make your programs run much more speedefficiently—without complicated machine language!

Andrew Vajoczki
 Brantford, ONT

SENSORS ON

Disk Notch Sensor is a short C-64/128 BASIC program that will inform you whether a disk's notch (the small rectangular hole on the disk) is covered by a write-protect tab or uncovered. This program works with a C-64/128 and a 1541 or 1571 disk drive.

To use the program, just turn on your disk drive and computer. Then run this program and insert a disk in the drive. It will quickly and safely tell you if your disk is physically write-protected.

You can easily modify this program to your own needs. Let's say you have a program that saves information on the disk. Just slightly modify *Disk Notch Sensor* and add it as a routine to the program. Then the program can check to see if the disk is not physically write-protected before it saves something on the disk.

You should be able to find many other uses for *Disk Notch*— Nghia Tran

Petaluma, CA

- ·10 REM *** DISK NOTCH SENSOR ****
- · 20 REM *** AUTHOR: NGHIA TRAN ***
- •21 PRINT"[CLEAR]PRESS ANY KEY TO CHECK D ISK"
- •22 GET A\$
- •23 IF A\$="" THEN 22
- ·30 OPEN15,8,15:PRINT"[CLEAR][WHITE]"
- •40 PRINT#15, "M-R"CHR\$(30) CHR\$(0)
- •50 GET#15,K\$
- •60 N=ASC(K\$+CHR\$(0))
- •70 IF N=16THEN 100
- •90 PRINT"[CLEAR][RVSON]DISK'S NOTCH IS[G REEN] WRITE-PROTECTED[RVSOFF]":GOTO110
- •100 PRINT"[CLEAR][RVSON]DISK'S NOTCH IS[
 c 1] NOT PROTECTED[RVSOFF]"
- •110 PRINT"[3"[DOWN]"][WHITE]PRESS [RVSON]R[RVSOFF] TO RE-CHECK OR [RVSON]Q[RVSOFF] TO QUIT."
- •120 GET I\$
- •130 IF I\$="" THEN 120
- •140 IF I\$="R" THEN 40
- 150 CLOSE15: END

...COMING IN THE OCTOBER ISSUE OF AHOY! (ON SALE SEPTEMBER 1)...

A RAINBOW OF DATA STRUCTURES ARRAYS, LISTS, AND LINKED LISTS A LOOK AT

BASIC 8.0

80-COLUMN

HI-RES


GRAPHICS

SPRAY-CAM

NOT A TYPO...
AN INDUSTRIAL
SIMULATION!



ECHELON

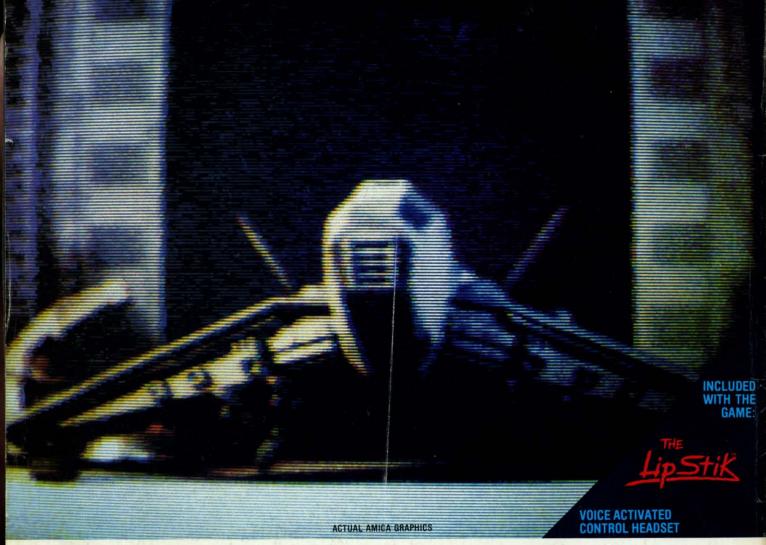

3-D SPACE FLIGHT SIMULATO

ECHELON . . . A top secret military facility where a few highly skilled pilots will be trained to operate the 21st Century's most awesome combat and exploration vehicle, the Lockheed C-104 Tomahawk. The C-104 spacecraft has the latest in advanced instrumentation, weaponry, and control systems.

ACTUAL C-64 SCREENS





Enhanced versions coming soon for APPLE, IBM, AMIGA, ATARI ST, and COMMODORE 128.





- 4 Different "State-of-the-Art" Weapons Systems Bi-Directional Transporter Unit
- Unmanned RPV (Remote Piloted Vehicle) Control Anti-Gravity Braking and Hovering
- Forward and Reverse Thrusters
- Twin 3-D Screens
- Real-Time Infrared Vector Graphics
- Non Real-Time Computer Enhanced Graphics
- Computer Assisted Control Systems
- Computer Information Data Link
- On Board Sub-Atomic Analyzer/Decoder
- Voice Activated Control Button



Reader Service No. 213

ECHELON is a true 3-D space flight simulator that puts you at the controls of the C-104 Tomahawk and in the heart of the action. You'll experience the excitement and thrill of real spaceflight through superb three dimensional graphics. But, before you go exploring on your own, it would be wise to go through the carefully designed training simulators. These rigorous courses will develop your skills in manuevering the spacecraft, accurate selection and use of weapons, control of RPV's, object retrieval and refuel and docking procedures. Developing these skills are essential to your survival when encountering hostile enemy spacecraft or exploring unknown terrain. I is available now and offers you the Simulation Adventure of a Lifetime for only \$44.95.





If you can't find our products at your local dealer, you can order direct. For mail orders, enclose check or money order, plus \$1.00 shipping and handling, and specify machine version desired. Order by phone on VISA, MasterCard or C.O.D. by calling TOLL FREE (800) 824-2549.

ACCESS SOFTWARE, INC. 2561 So. 1560 W. Woods Cross, UT 84087

0	SUBSCRIBE TO A	AHOY!	0
0	☐ Send me twelve issues of AHOY! for \$23.00 (\$30.00 C	anada & elsewhere).	0
0	☐ Send me twenty-four issues of AHOY! for \$44.00 (\$55.00	Canada & elsewhere)	0
0	THE RESERVE AND ADDRESS OF THE PARTY OF THE		0
0	☐ Payment enclosed: \$ ☐ Please bill me.		0
0	☐ Please charge to Credit Card checked:		0
0	☐ MasterCard ☐ VISA Card #	Exp. Date	0
0	Signature		0
0		Western Street, Street	0
0	NAME		0
0	ADDRESS		0
0	CITY		0
0	STATE	CIP	0
0			0
0	SUBSCRIBE TO THE AHOY! DIST	K MAGAZINE	0
0			0
0	□ Send me twelve issues of the AHOY! Disk Magazine	for \$97.00 (\$135.00	0
0	Canada & elsewhere).		0
0	☐ Send me twenty-four issues of the AHOY! Disk Magazi Canada & elsewhere).	ine for \$180.00 (\$250.00	0
0	☐ Payment enclosed: \$ ☐ Please bill me.		0
0	☐ Please charge to Credit Card checked: ☐ MasterCard ☐ VISA Card #	Exp. Date	0 0
0	Signature		0
0	NAME		0
0	ADDRESS		0
0			0
0	A LOCAL TO SERVICE STATE OF THE PARTY OF THE	/ID	0
0	STATE	CIP	0
tha	September 1987 Ahoy! Void after January 3, READER SERVICE CA request additional information on any product advertised or otherwise at is accompanied by a reader service number, circle the corresponding card. We will promptly forward your request to the designal 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 12	pictured in this issue of Ahoy! number below and mail this ated companies.	
	132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 15		
161	162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 18	32 183 184 185 186 187 188 189 190	W
	192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 21 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 23		
241	242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 26	52 263 264 265 266 267 268 269 270	
	272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 25 A. Please check whether you are	22 293 294 295 296 297 298 299 300	
1	1. male 2. female D. From which of the folk	owing sources did you obtain your	
1	B. What is your age? copy of Ahoy!? 1. □ under 18 2. □ 18-24 3. □ 25-34 1. □ newsstand 2. □	subscription (mail)	
	4. □ 35-44 5. □ 45-54 6. □ 55-64 7. □ 65+ 3. □ from a friend or fam C. Education level completed 4. □ other		
3.	1. □ elementary 2. □ high school If not currently a subscriber 3. □ junior college 4. □ college graduate 1. □ yes 2. □ no 5. □ master's degree 6. □ PhD 2. □ no	, do you plan to become one?	
	ame		
	treet		
Ci	ityStateZi	p	

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 65 MT. MORRIS, ILL.

POSTAGE WILL BE PAID BY ADDRESSEE



P.O. BOX 341 MT. MORRIS, IL 61054-9925



BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 65 MT. MORRIS, ILL.

POSTAGE WILL BE PAID BY ADDRESSEE



P.O. BOX 341 MT. MORRIS, IL 61054-9925

Idlamillhaddalalddaldaadddddaldd

PLACE STAMP HERE

AHOY! MAGAZINE P.O. Box 2501 Clinton, Iowa 52735 AwardWa assorted

kets, coup tionery. A create pri seals to de

Creatin snap. The step by st cate, but it cess that r for thems menus.

First the mat of the plates, be styles, and signs for the numb screen picterist curs of the ten

There a

special op up text bo of text an dards for jority of t downrigh cent moor are some ligingly a awardmal

After so puterist ch creation. award can ed are pa book, bu doghouse ation, har ey bag, n and team

Next th font from